



KATHE
CEMENT PIPES INDUSTRY

**BUILT ON QUALITY.
DRIVEN BY ENGINEERING.**



ABOUT US

Building Stronger Infrastructure

SINCE 2012

QUALITY
DURABILITY
PROGRESS
TOGETHER.

Trusted for a Stronger India

Established in 2012, Kathe Cement Pipes Industry is a trusted manufacturer of high-quality concrete infrastructure products, including Hume Pipes, Spigot Socket RCC Pipes, RCC Pipes and other concrete solutions.

Our products are valued for their high durability, tensile strength, precision, rugged construction, easy installation and long-lasting performance. We manufacture every product using premium quality raw materials and progressive technology, following established industry standards.

Available in various sizes and specifications, our products are designed to meet the specific requirements of our customers across diverse infrastructure applications. With advanced infrastructure and an experienced team, we are equipped to deliver reliable solutions efficiently and consistently.



650

Projects



50

Skilled Employees



170

Industries Served



2500

Satisfied Customers

U DRAINS

Engineered for Faster, Smarter Drainage

Precast concrete U Drains provide a practical solution for storm-water management, industrial drainage and utility infrastructure. Manufactured under controlled factory conditions, these ready-to-install drainage channels help reduce on-site construction time while delivering consistent quality & dimensional accuracy.




Standardized Sizes. Multiple Applications.

Our U Drains are **Available in 8 Size** configurations, allowing the system to be selected according to project requirements.

Width	Height (Inside Clear Dimension)
1200 mm	x 1200 mm
900 mm	x 900 mm
750 mm	x 750 mm
600 mm	x 600 mm / 750 mm / 900 mm
450 mm	x 450 mm / 600 mm / 750 mm
300 mm	x 400 mm

Capacity: T6 Ton; T25 Ton

Technical Diagram

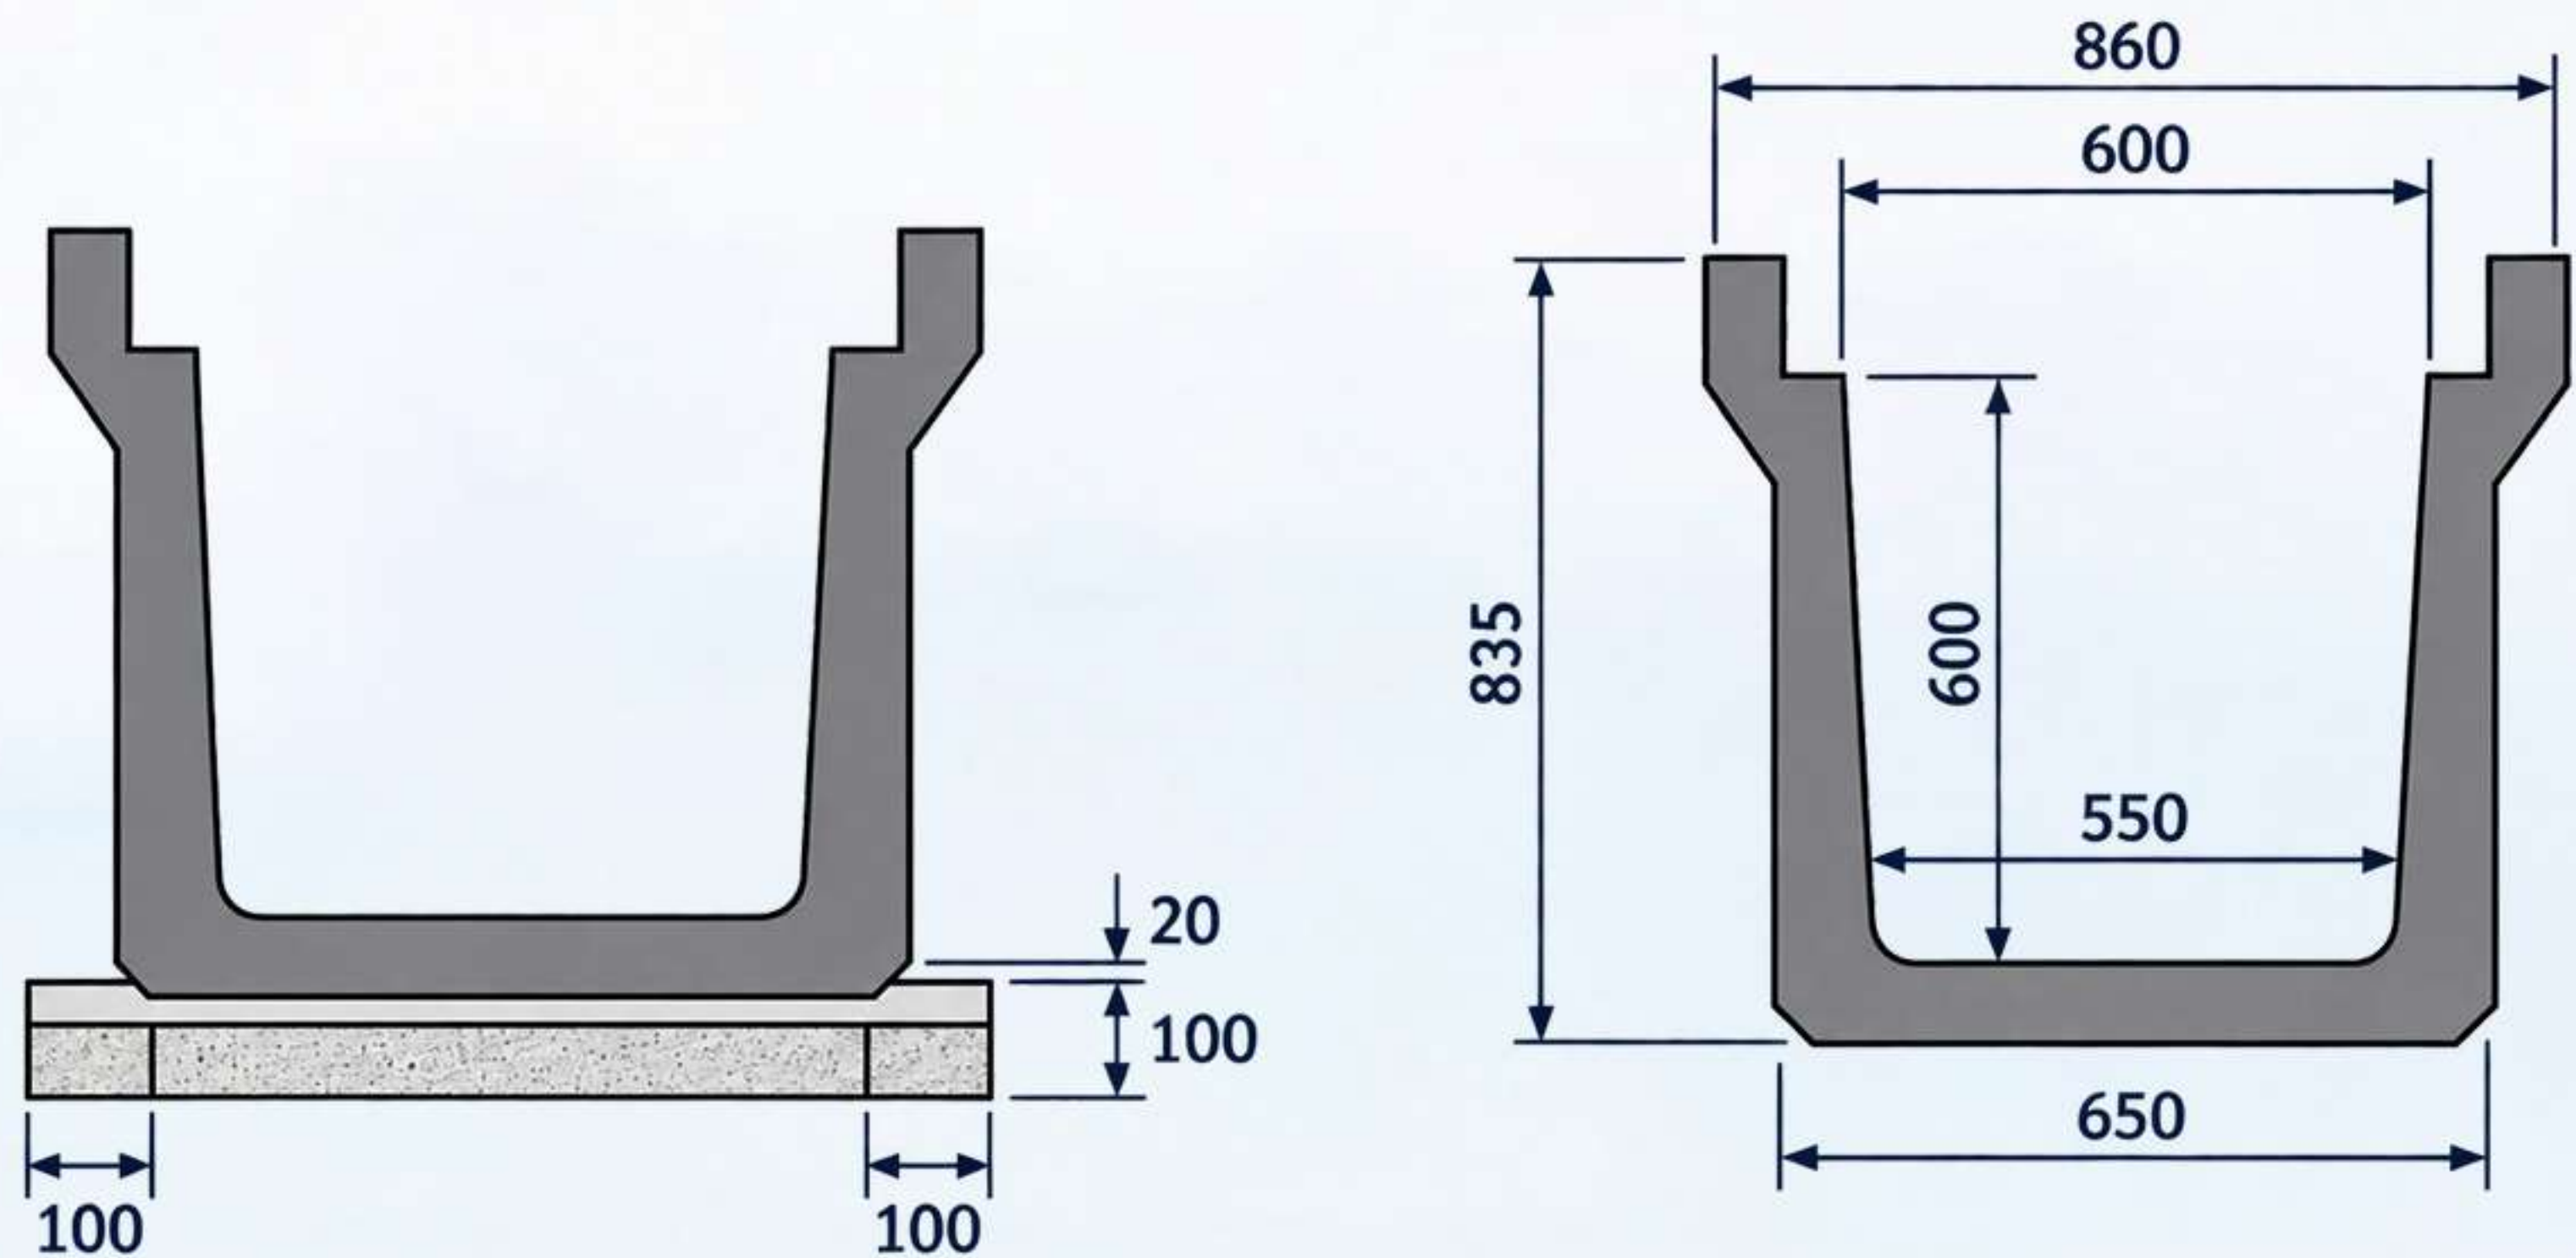

RCC PIPES

Engineered for Flow. Built for Strength.

High-performance concrete pipe solutions designed for dependable drainage, sewerage, utility and infrastructure projects.



HDPE LINED RCC PIPES

Enhanced Protection. Built on RCC Strength.

RCC pipes with a smooth HDPE inner lining, designed for reliable flow and improved resistance against corrosion, chemicals and abrasion.

Ideal for:

- Sewerage systems
- Wastewater drainage
- Industrial effluent
- Corrosive environments
- Large-diameter pipelines

Available Sizes:

- 300 mm – 2000 mm
- Classes: NP3 & NP4



JACKING PIPES

Built for Trenchless Installation


Designed for underground pipe-jacking applications where conventional open excavation is impractical. These pipes provide dimensional accuracy, structural integrity and dependable performance during installation.

Ideal for:

- Road crossings
- Utility corridors
- Railway crossings
- Sewer networks
- Urban infrastructure

Available Sizes:

- 300 mm – 2000 mm
- Classes: NP2, NP3 & NP4

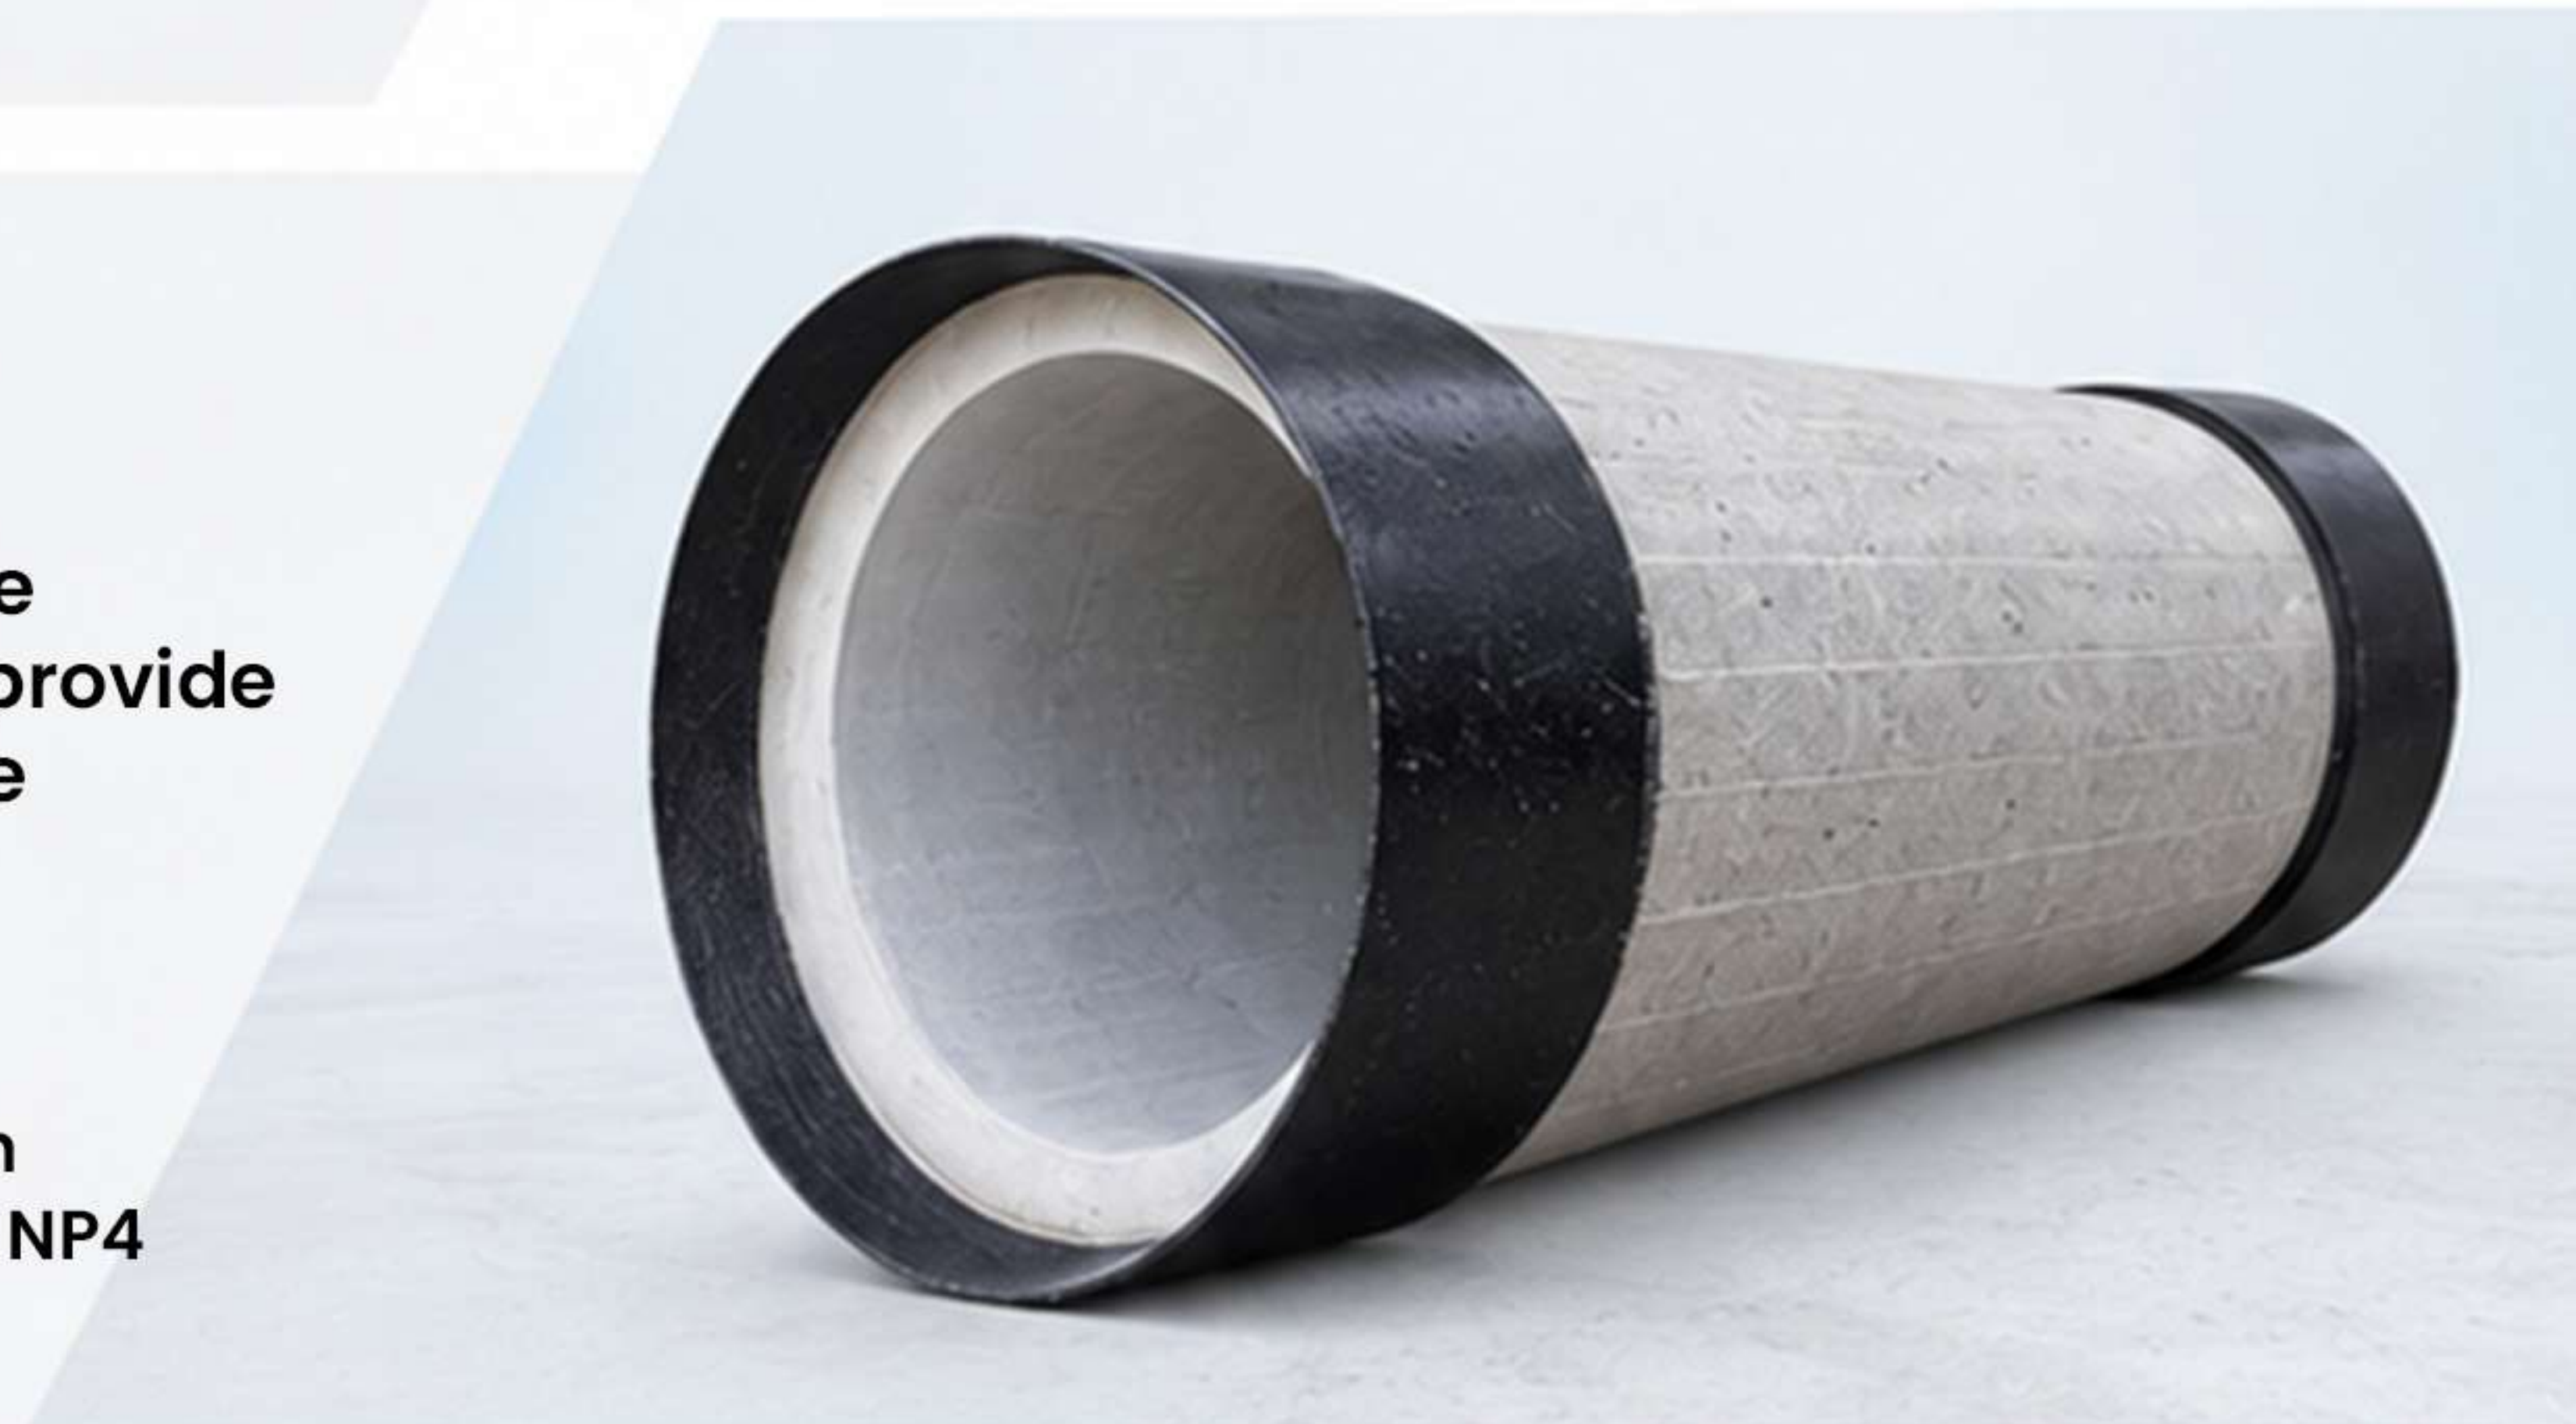

RCC PIPES

Reliable Concrete Piping for Infrastructure

Precision-manufactured RCC pipes designed for efficient water and wastewater conveyance with dependable structural performance.

Suitable for:

- Stormwater drainage
- Sewerage systems
- Culverts
- Irrigation networks
- Industrial drainage

Available Sizes:

- 300 mm – 2000 mm
- Options: Reinforced & Non-Reinforced




BUILDING BLOCKS & FLY ASH BRICKS

**Strong. Sustainable.
Future Ready.**

Precast concrete blocks and fly ash bricks offer a smarter alternative to conventional construction materials. Designed for strength, durability and environmental responsibility.




SOLID BLOCKS

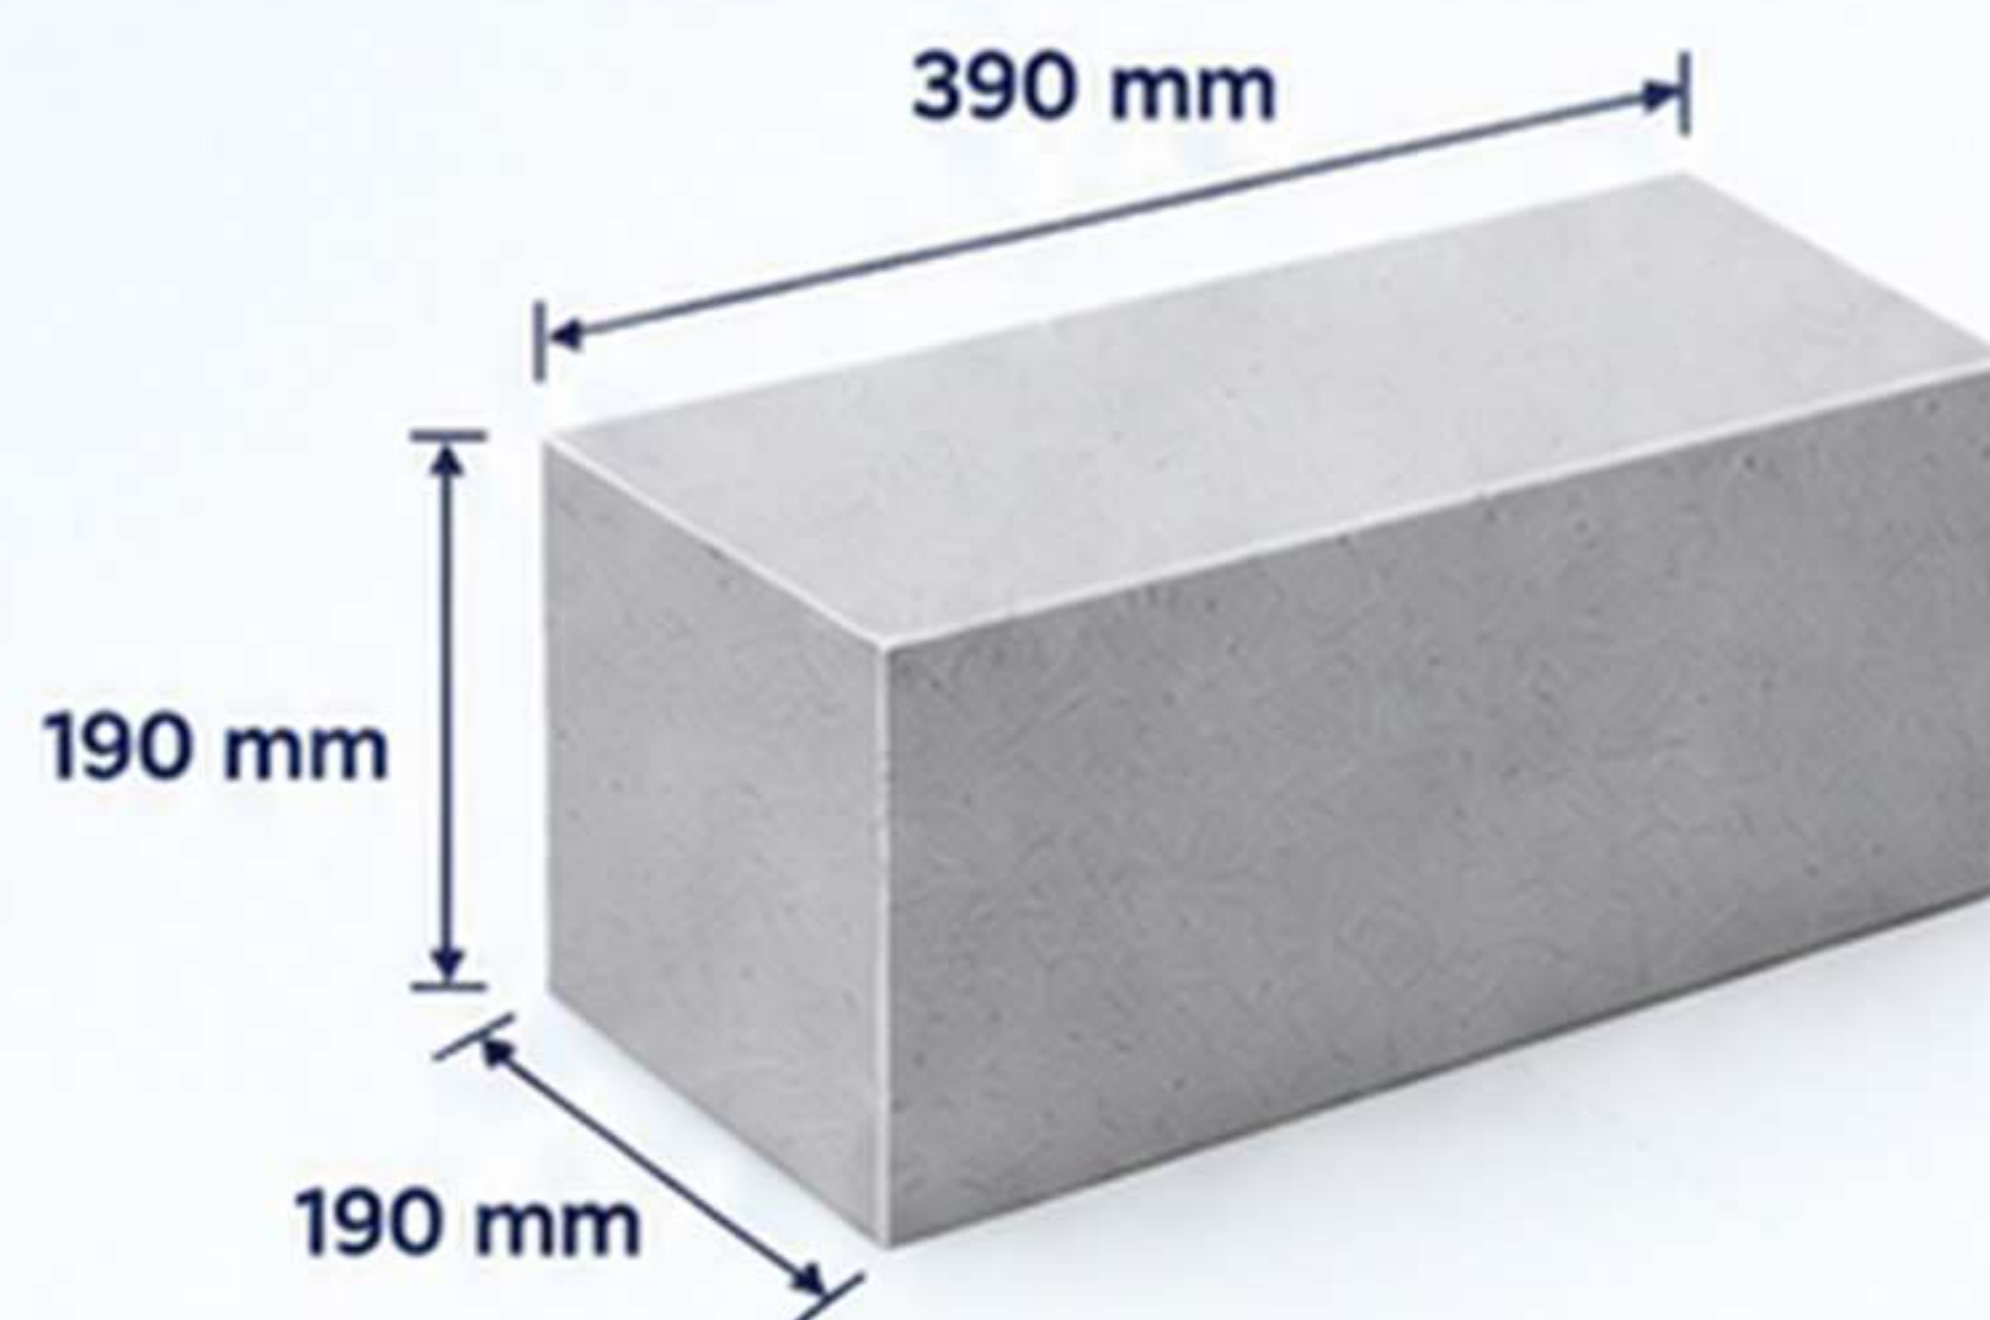

Available Sizes:

- 390(L) × 190(W) × 140(T) mm
- 390(L) × 190(W) × 90(T) mm
- 300(L) × 200(W) × 200(T) mm

HOLLOW BLOCKS

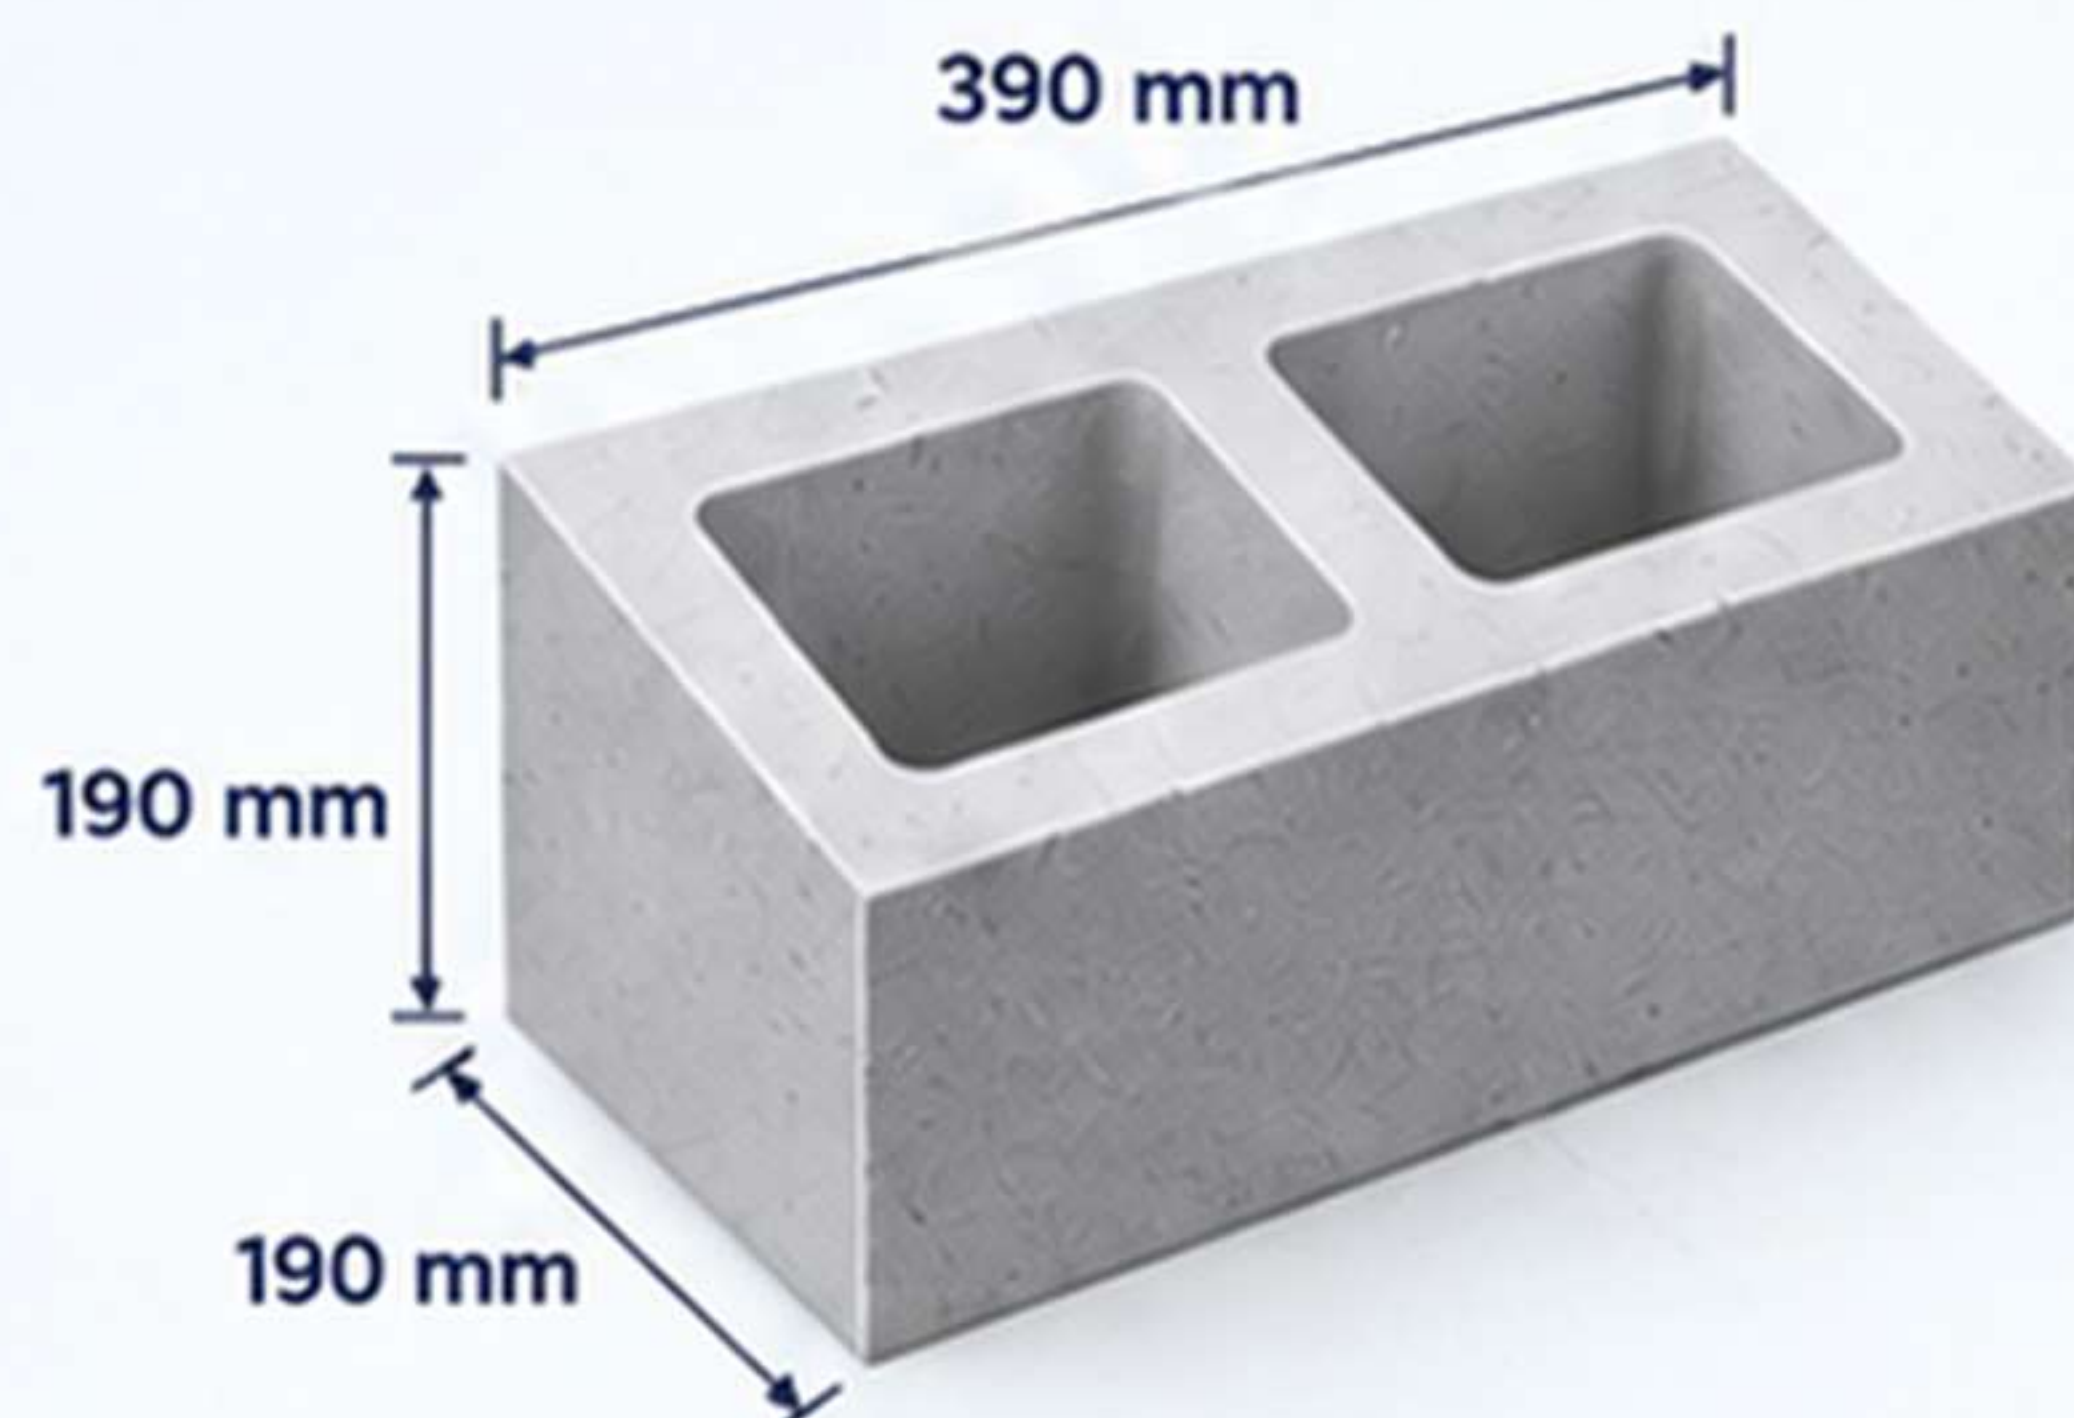


Benefits:

-  Lightweight
-  Thermal Efficiency
-  Sustainable Material
-  Ideal for Modern Construction


FLY ASH BRICKS

Available Sizes:

- 230(L) × 110(W) × 75(T) mm

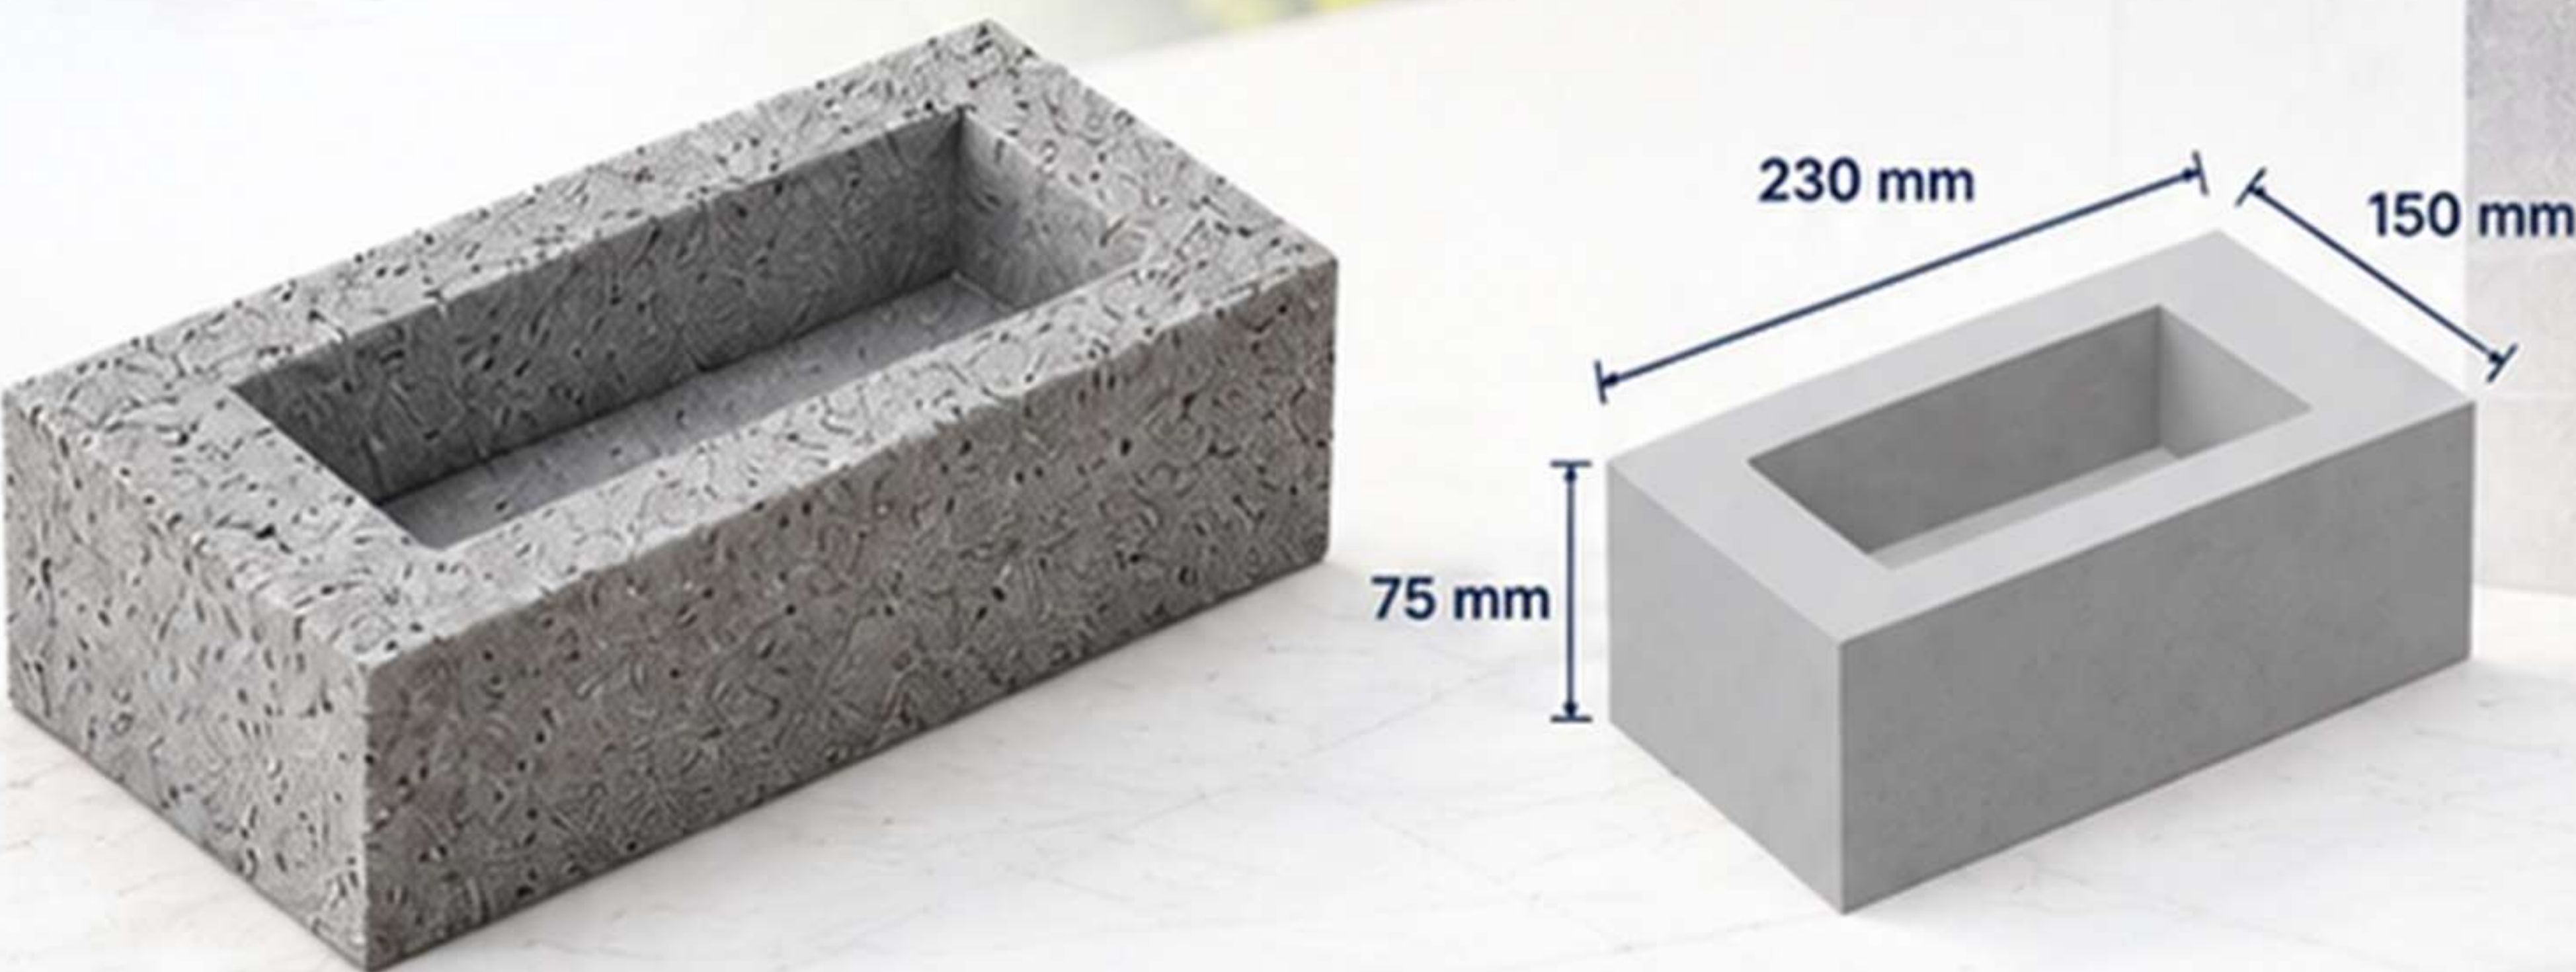


RETAINING BLOCKS

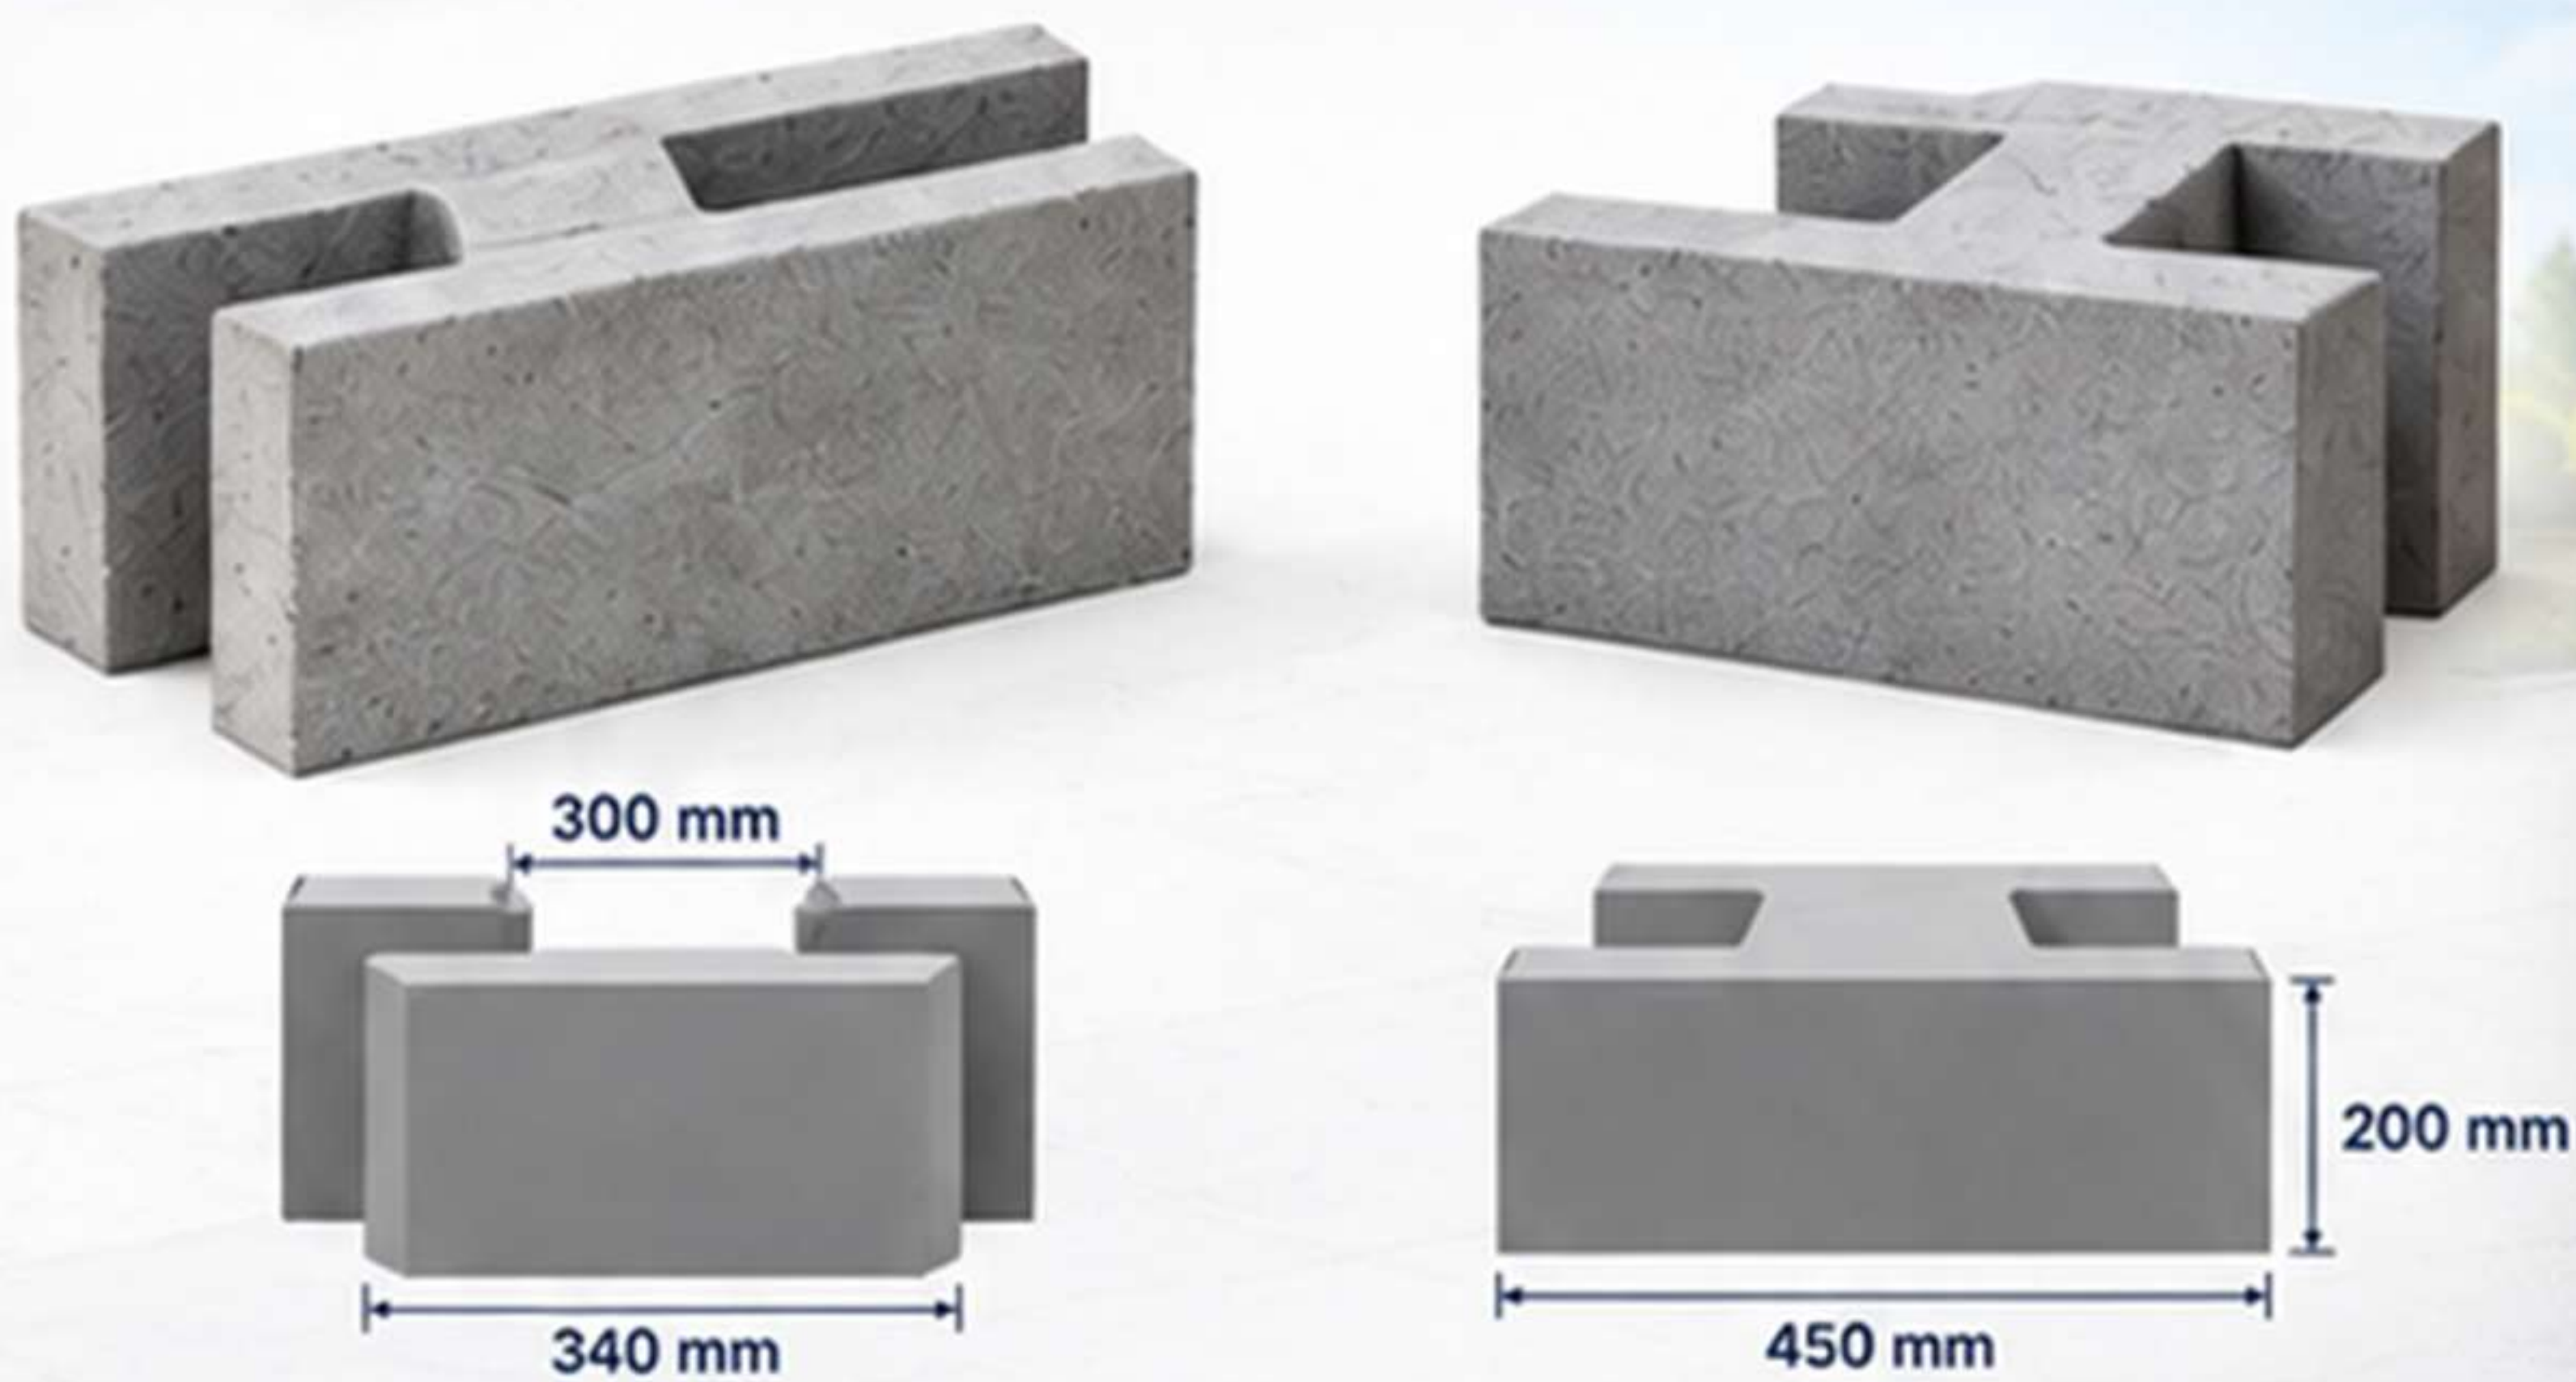

FERROCRETE DRAIN COVERS

Available Sizes:

- 1050 × 500 × 45 mm
- 1000 × 500 × 45 mm
- 900 × 450 × 45 mm

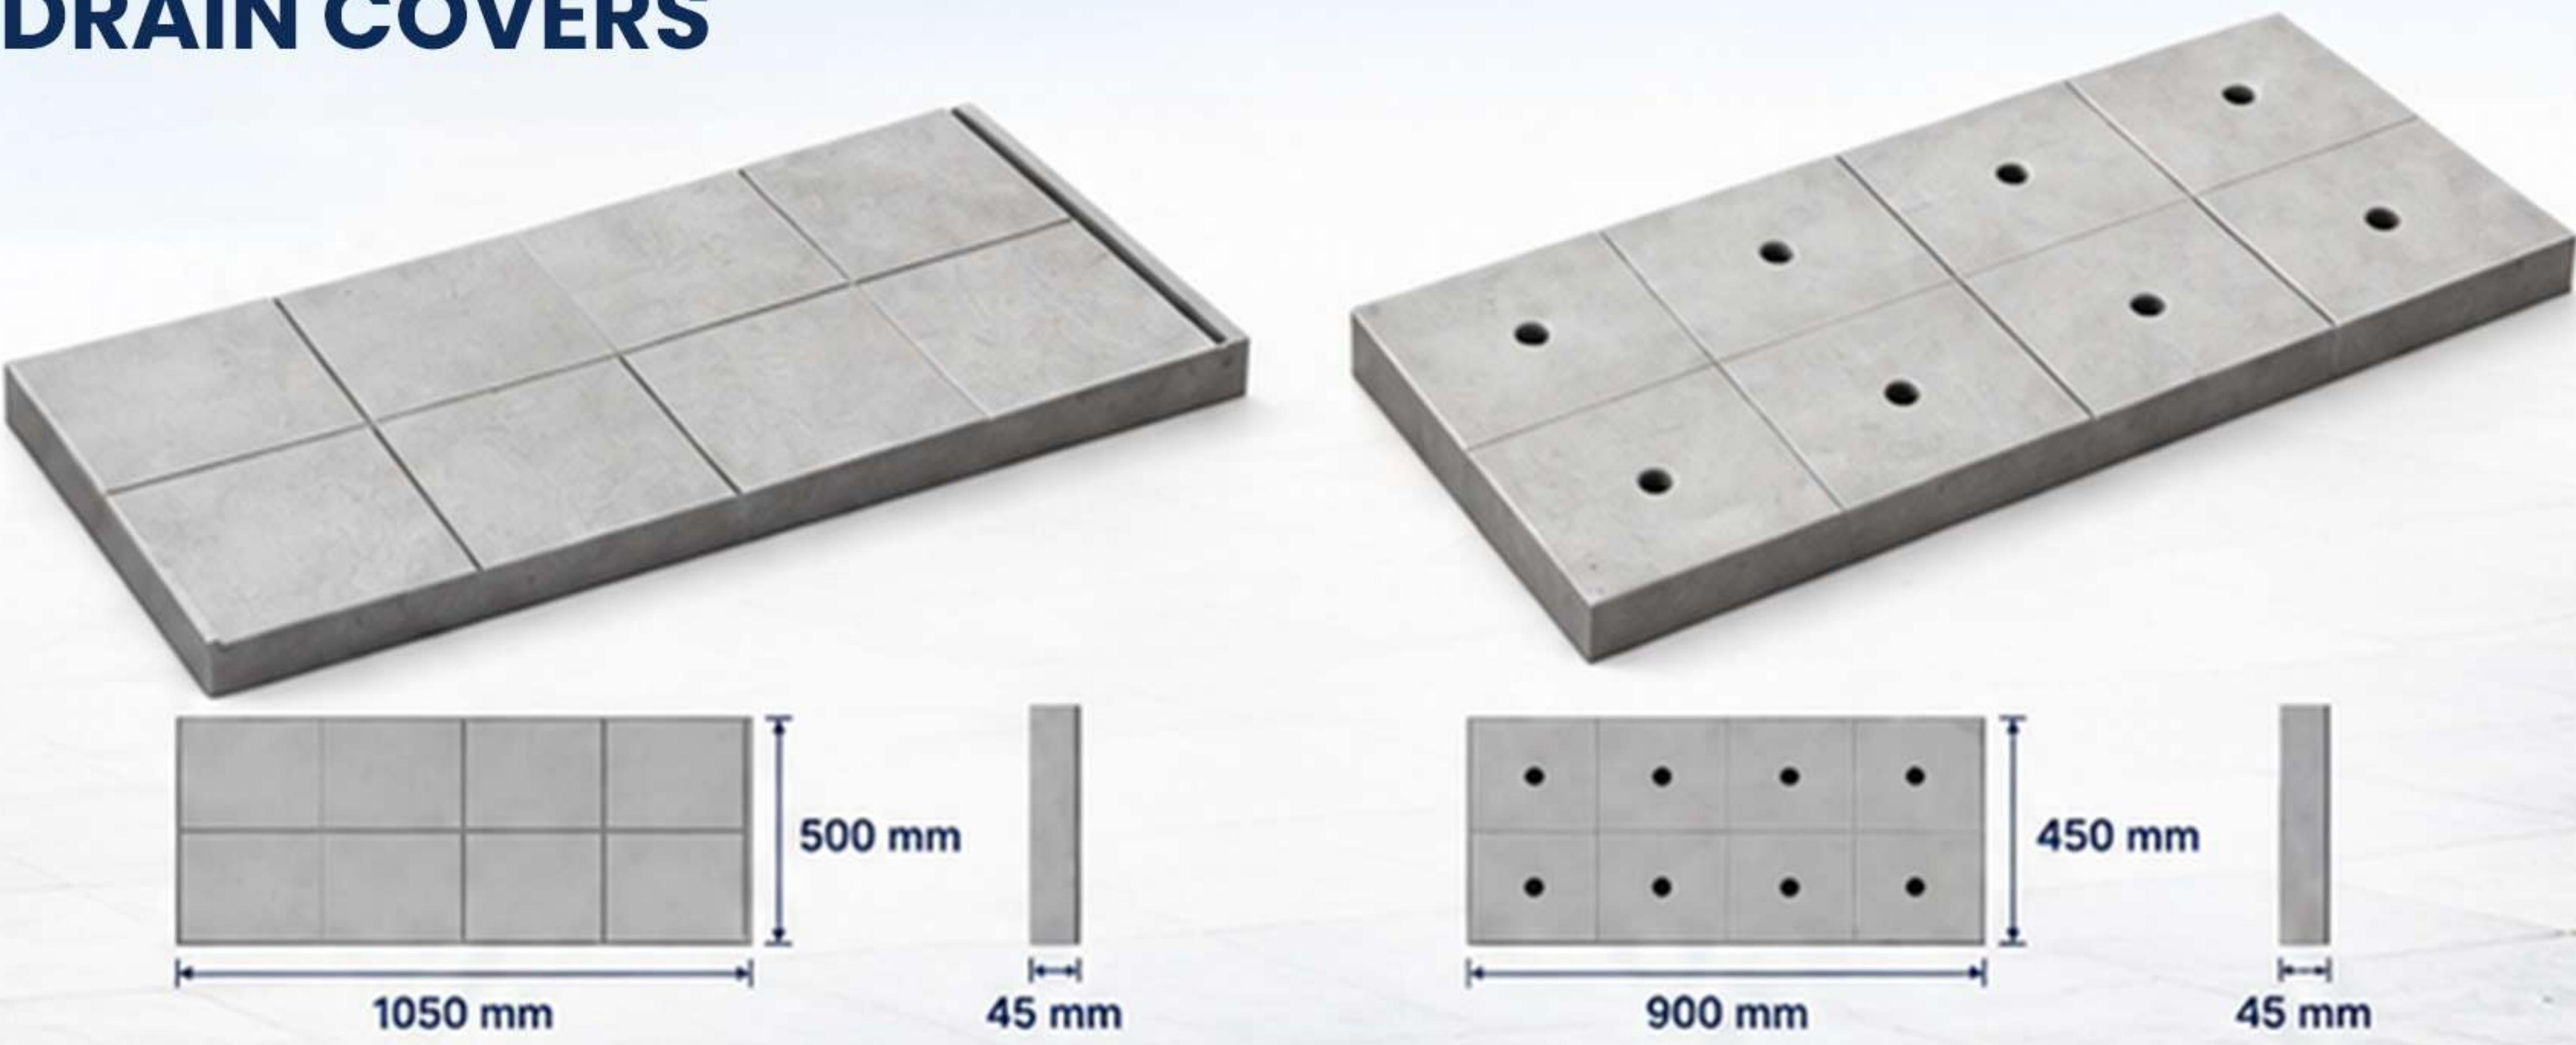


KERBS

Shape Better Spaces. Stronger Tomorrow.

Kerbs & Dividers are integral to modern cityscapes and landscapes. They aggregate quality, durability and strength.


SPLAY

- 45° angled profile
- Available widths: 125 mm, 150 mm
- 150 mm & 200 mm
- Heights: 300 mm, 375 mm & 450 mm
- Standard length: 500 mm

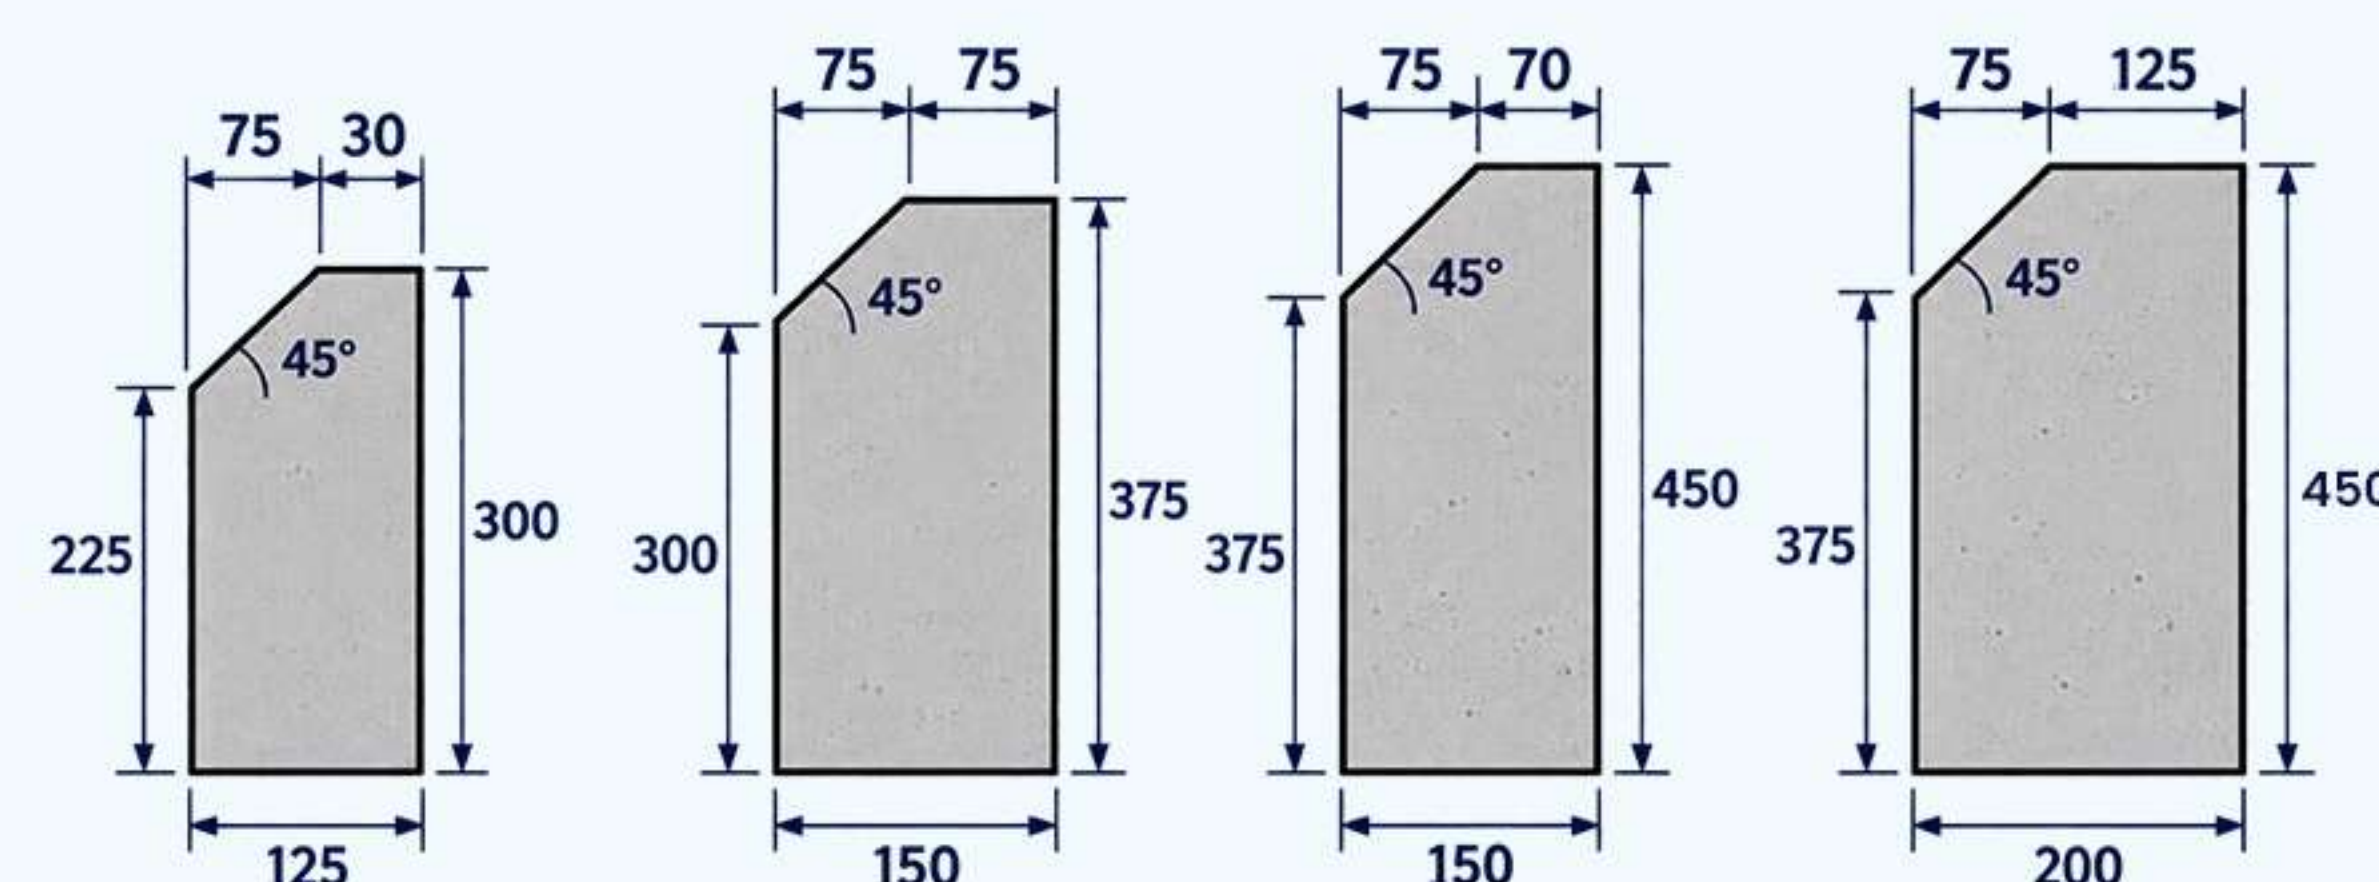


HALF BATTER

- Angled profile with 14° slope
- Available widths: 125 mm, 150 mm & 200 mm
- Heights: 300 mm, 375 mm & 450 mm
- Standard length: 500 mm

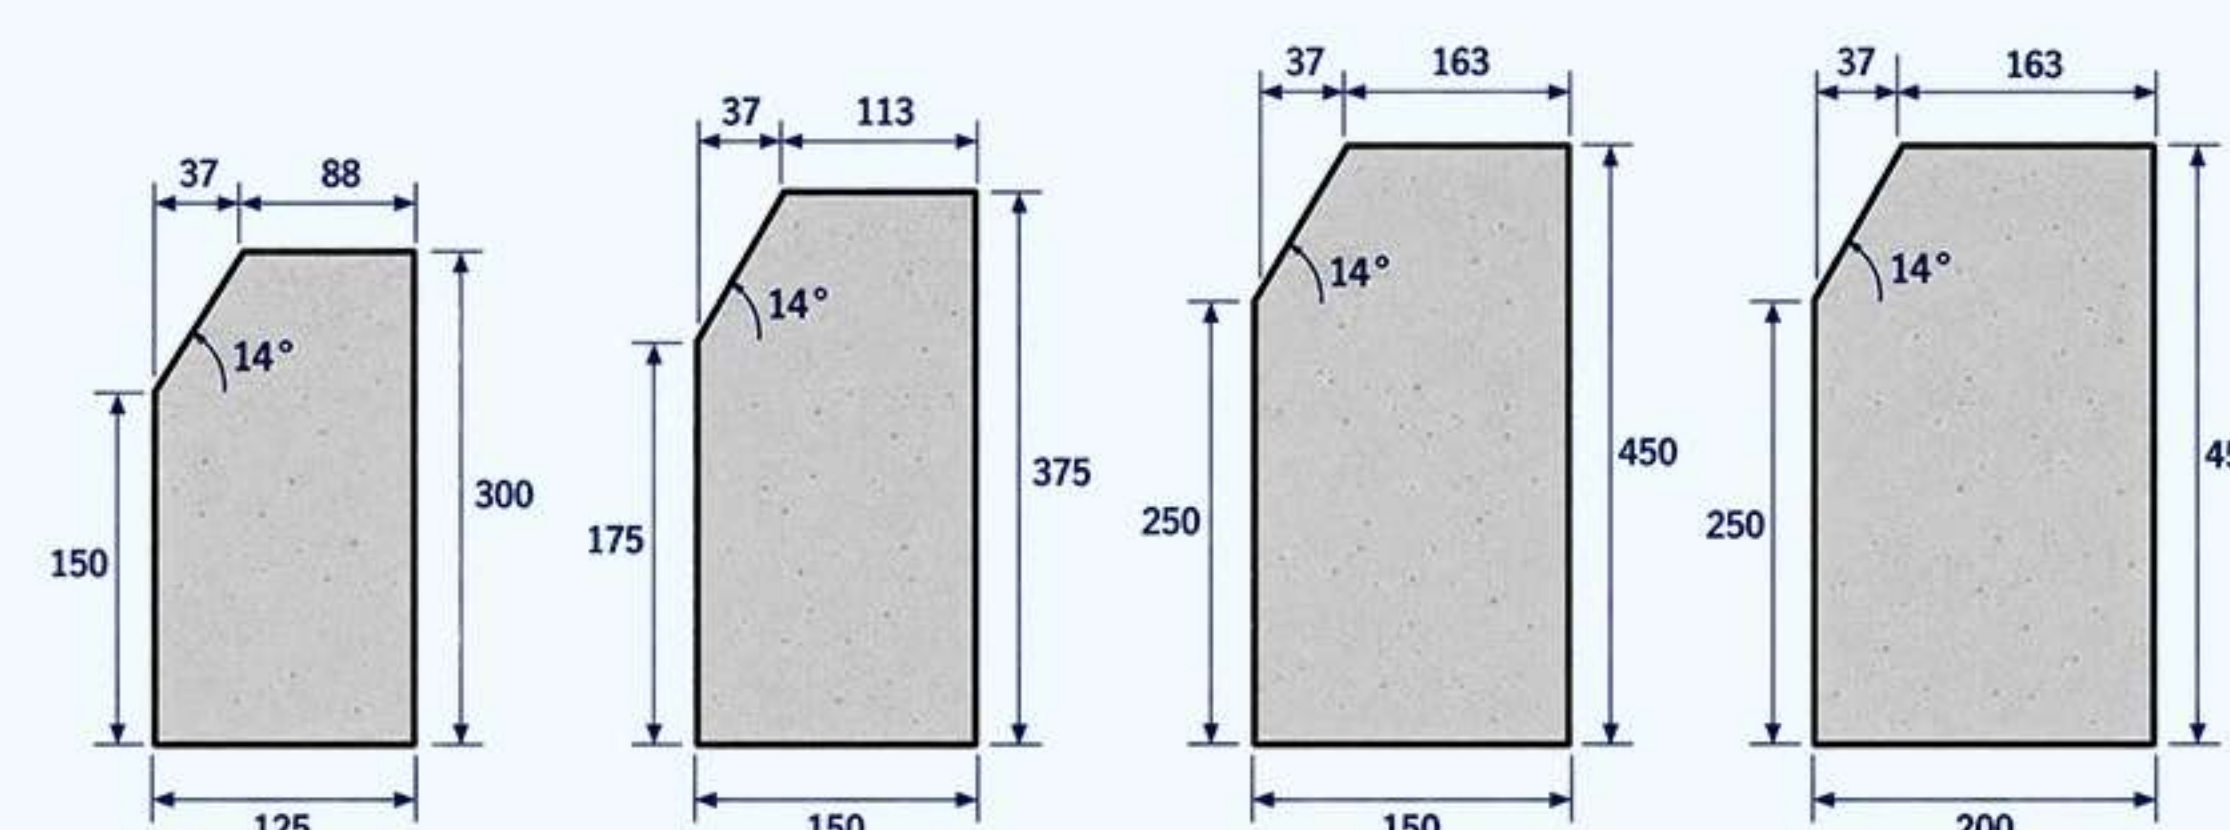


BULLNOSE

- Rounded-edge profile
- Available widths: 125 mm, 150 mm & 200 mm
- Heights: 300 mm, 375 mm & 450 mm
- Standard length: 500 mm

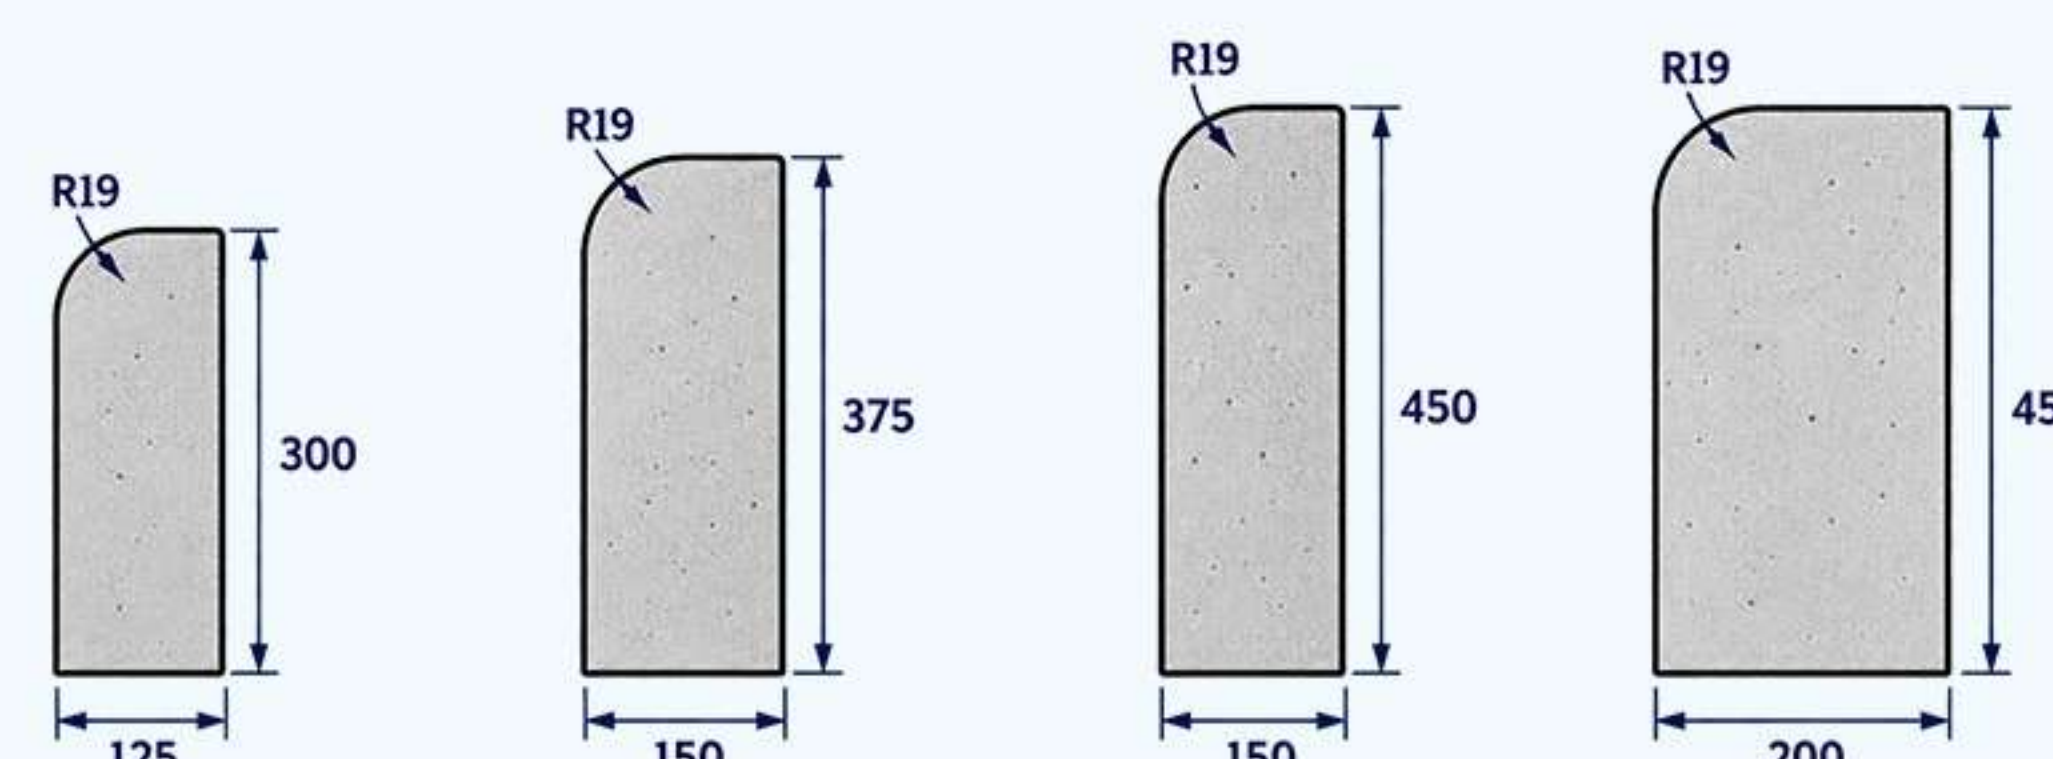

FLUSH

- Clean, straight-edge profile
- Available widths: 125 mm, 150 mm & 200 mm
- Heights: 300 mm, 375 mm & 450 mm
- Standard length: 500 mm

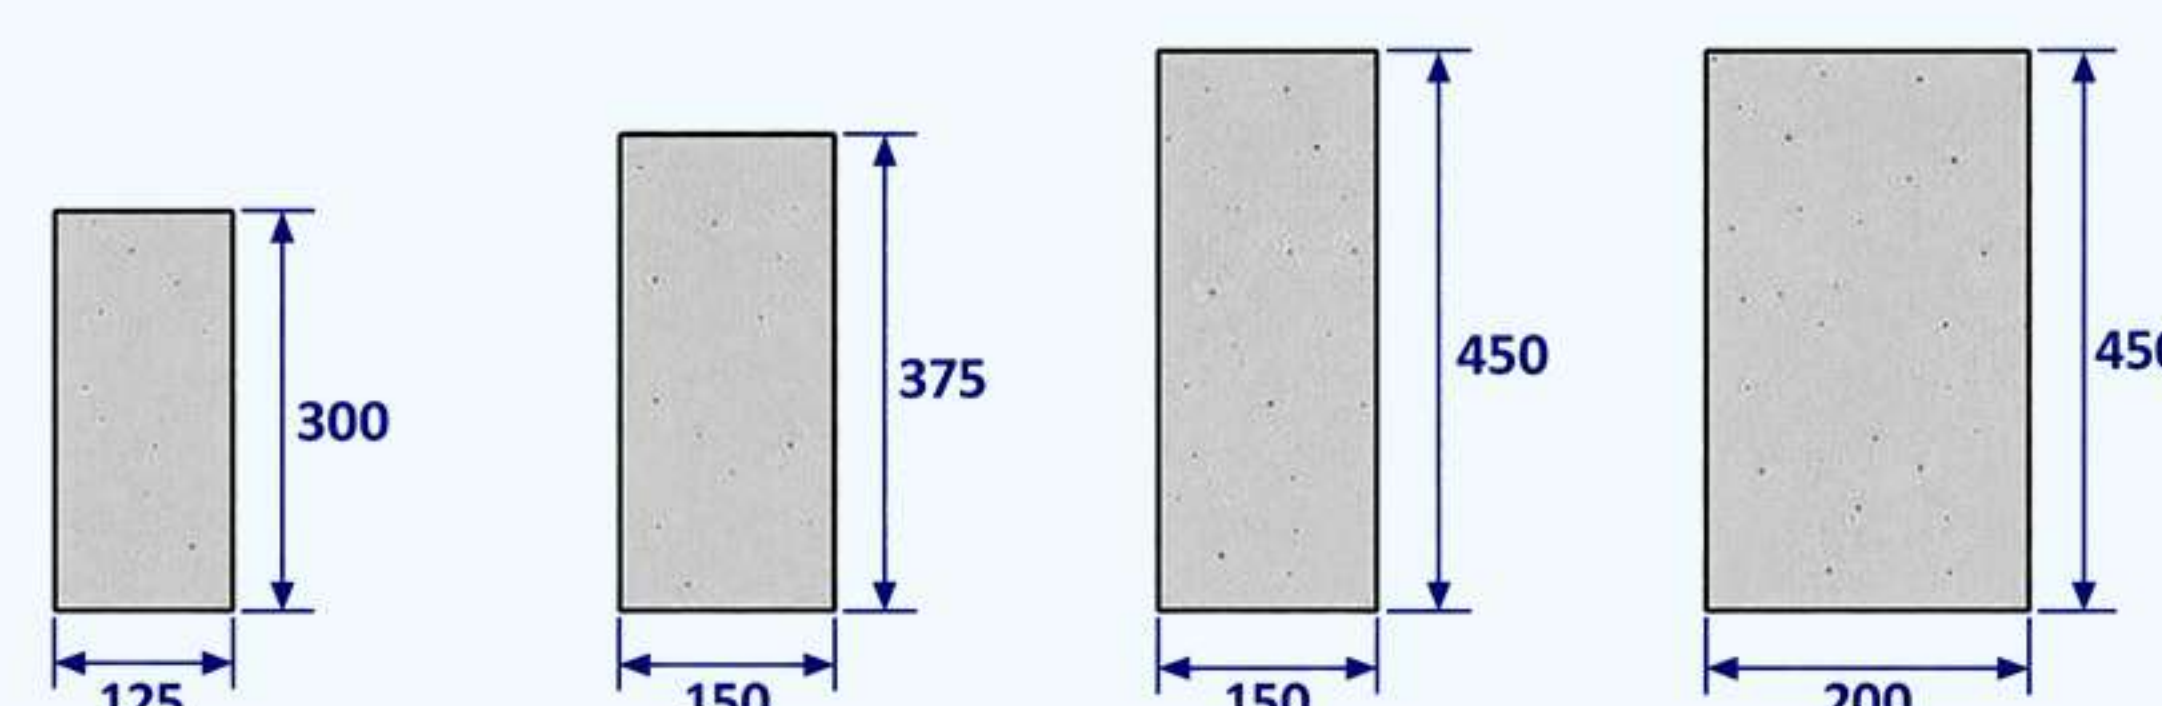

CRASH BARRIER AND PARABOLIC ROAD DIVIDERS

**Engineered for
safer roads.
Built for demanding
conditions.**


Precast road safety systems designed to provide dependable traffic separation, impact protection and controlled movement across highways, expressways and major road networks.




ROAD DIVIDERS

Our precast road dividers create clear traffic boundaries while helping improve roadway organization and safety.

Designed for consistent performance across highways, urban roads and infrastructure projects.

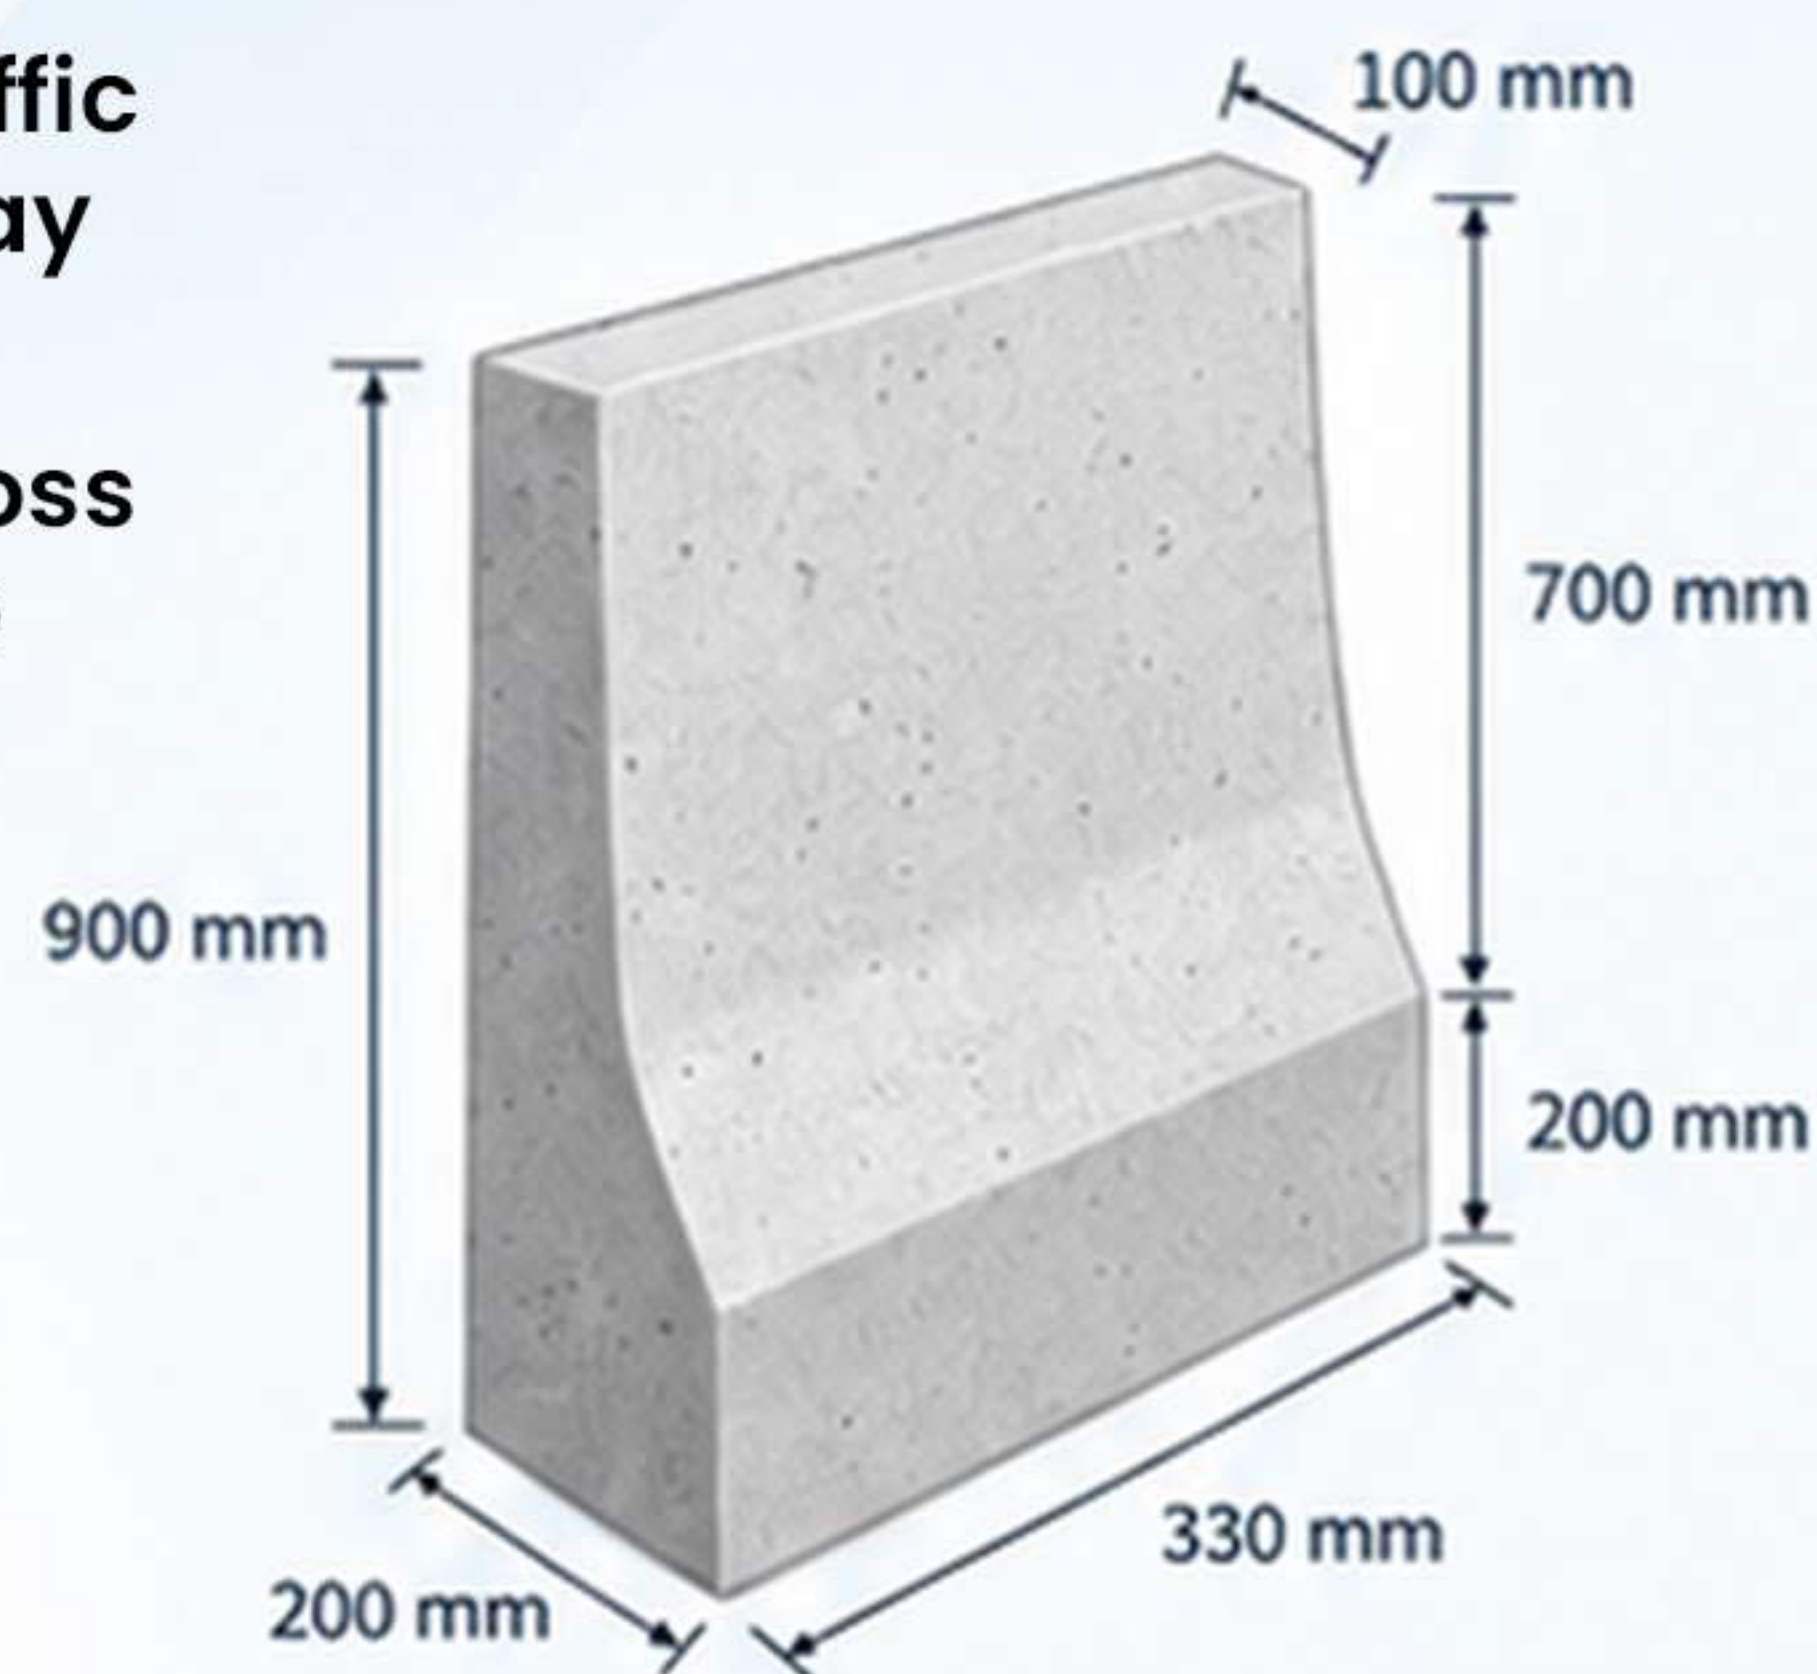


TYPE RD-1
900 × 330 × 200 mm

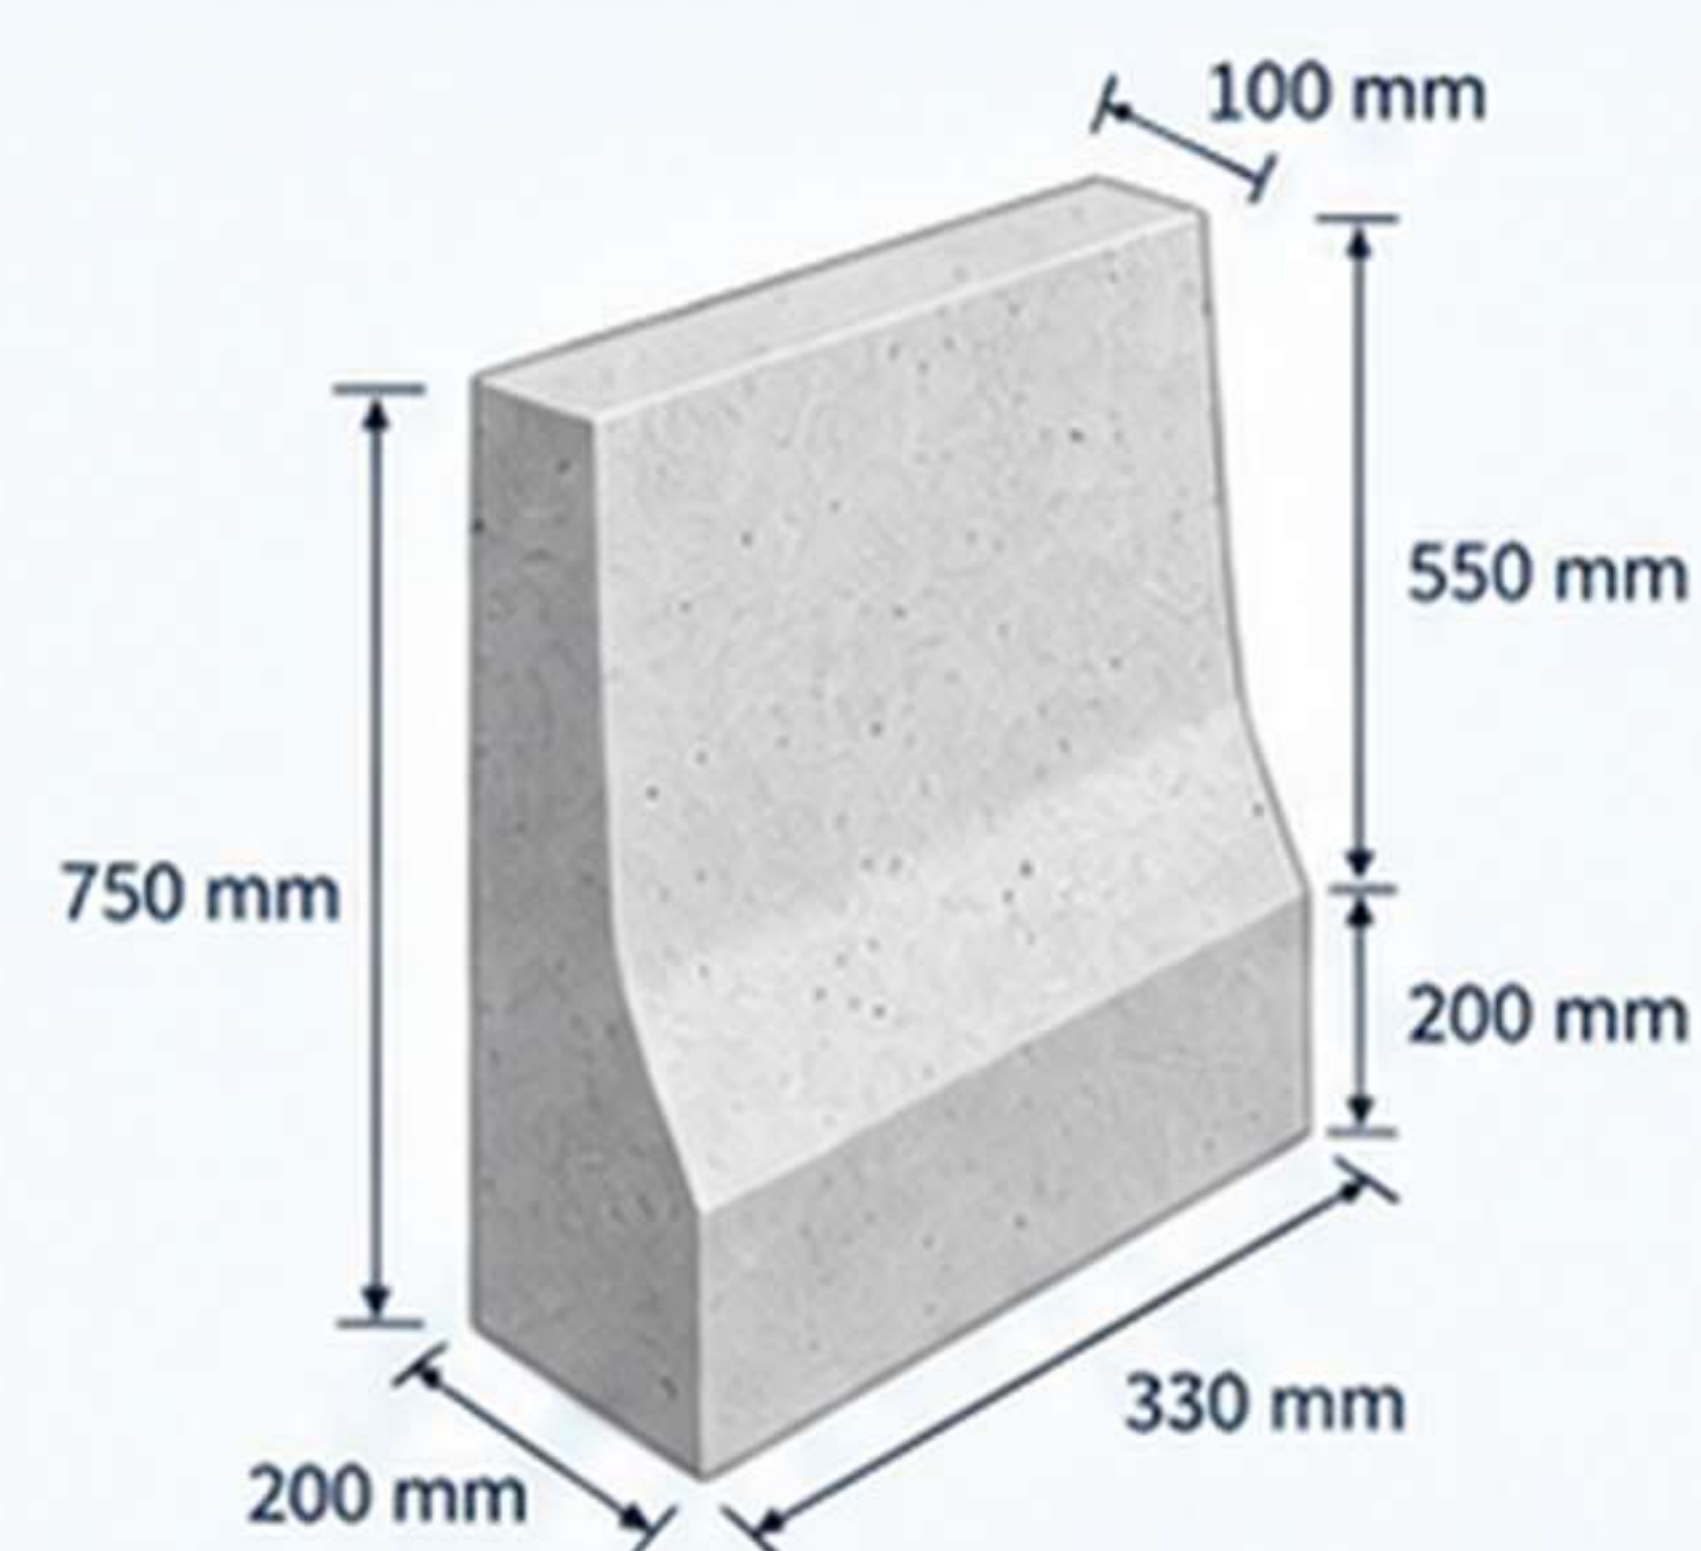

TYPE RD-2
750 × 330 × 200 mm

CRASH BARRIER

Heavy-duty precast crash barriers provide a robust protective boundary for high-speed roadways and critical infrastructure. Their strong, stable construction helps manage vehicle impact zones while supporting safer traffic corridors.

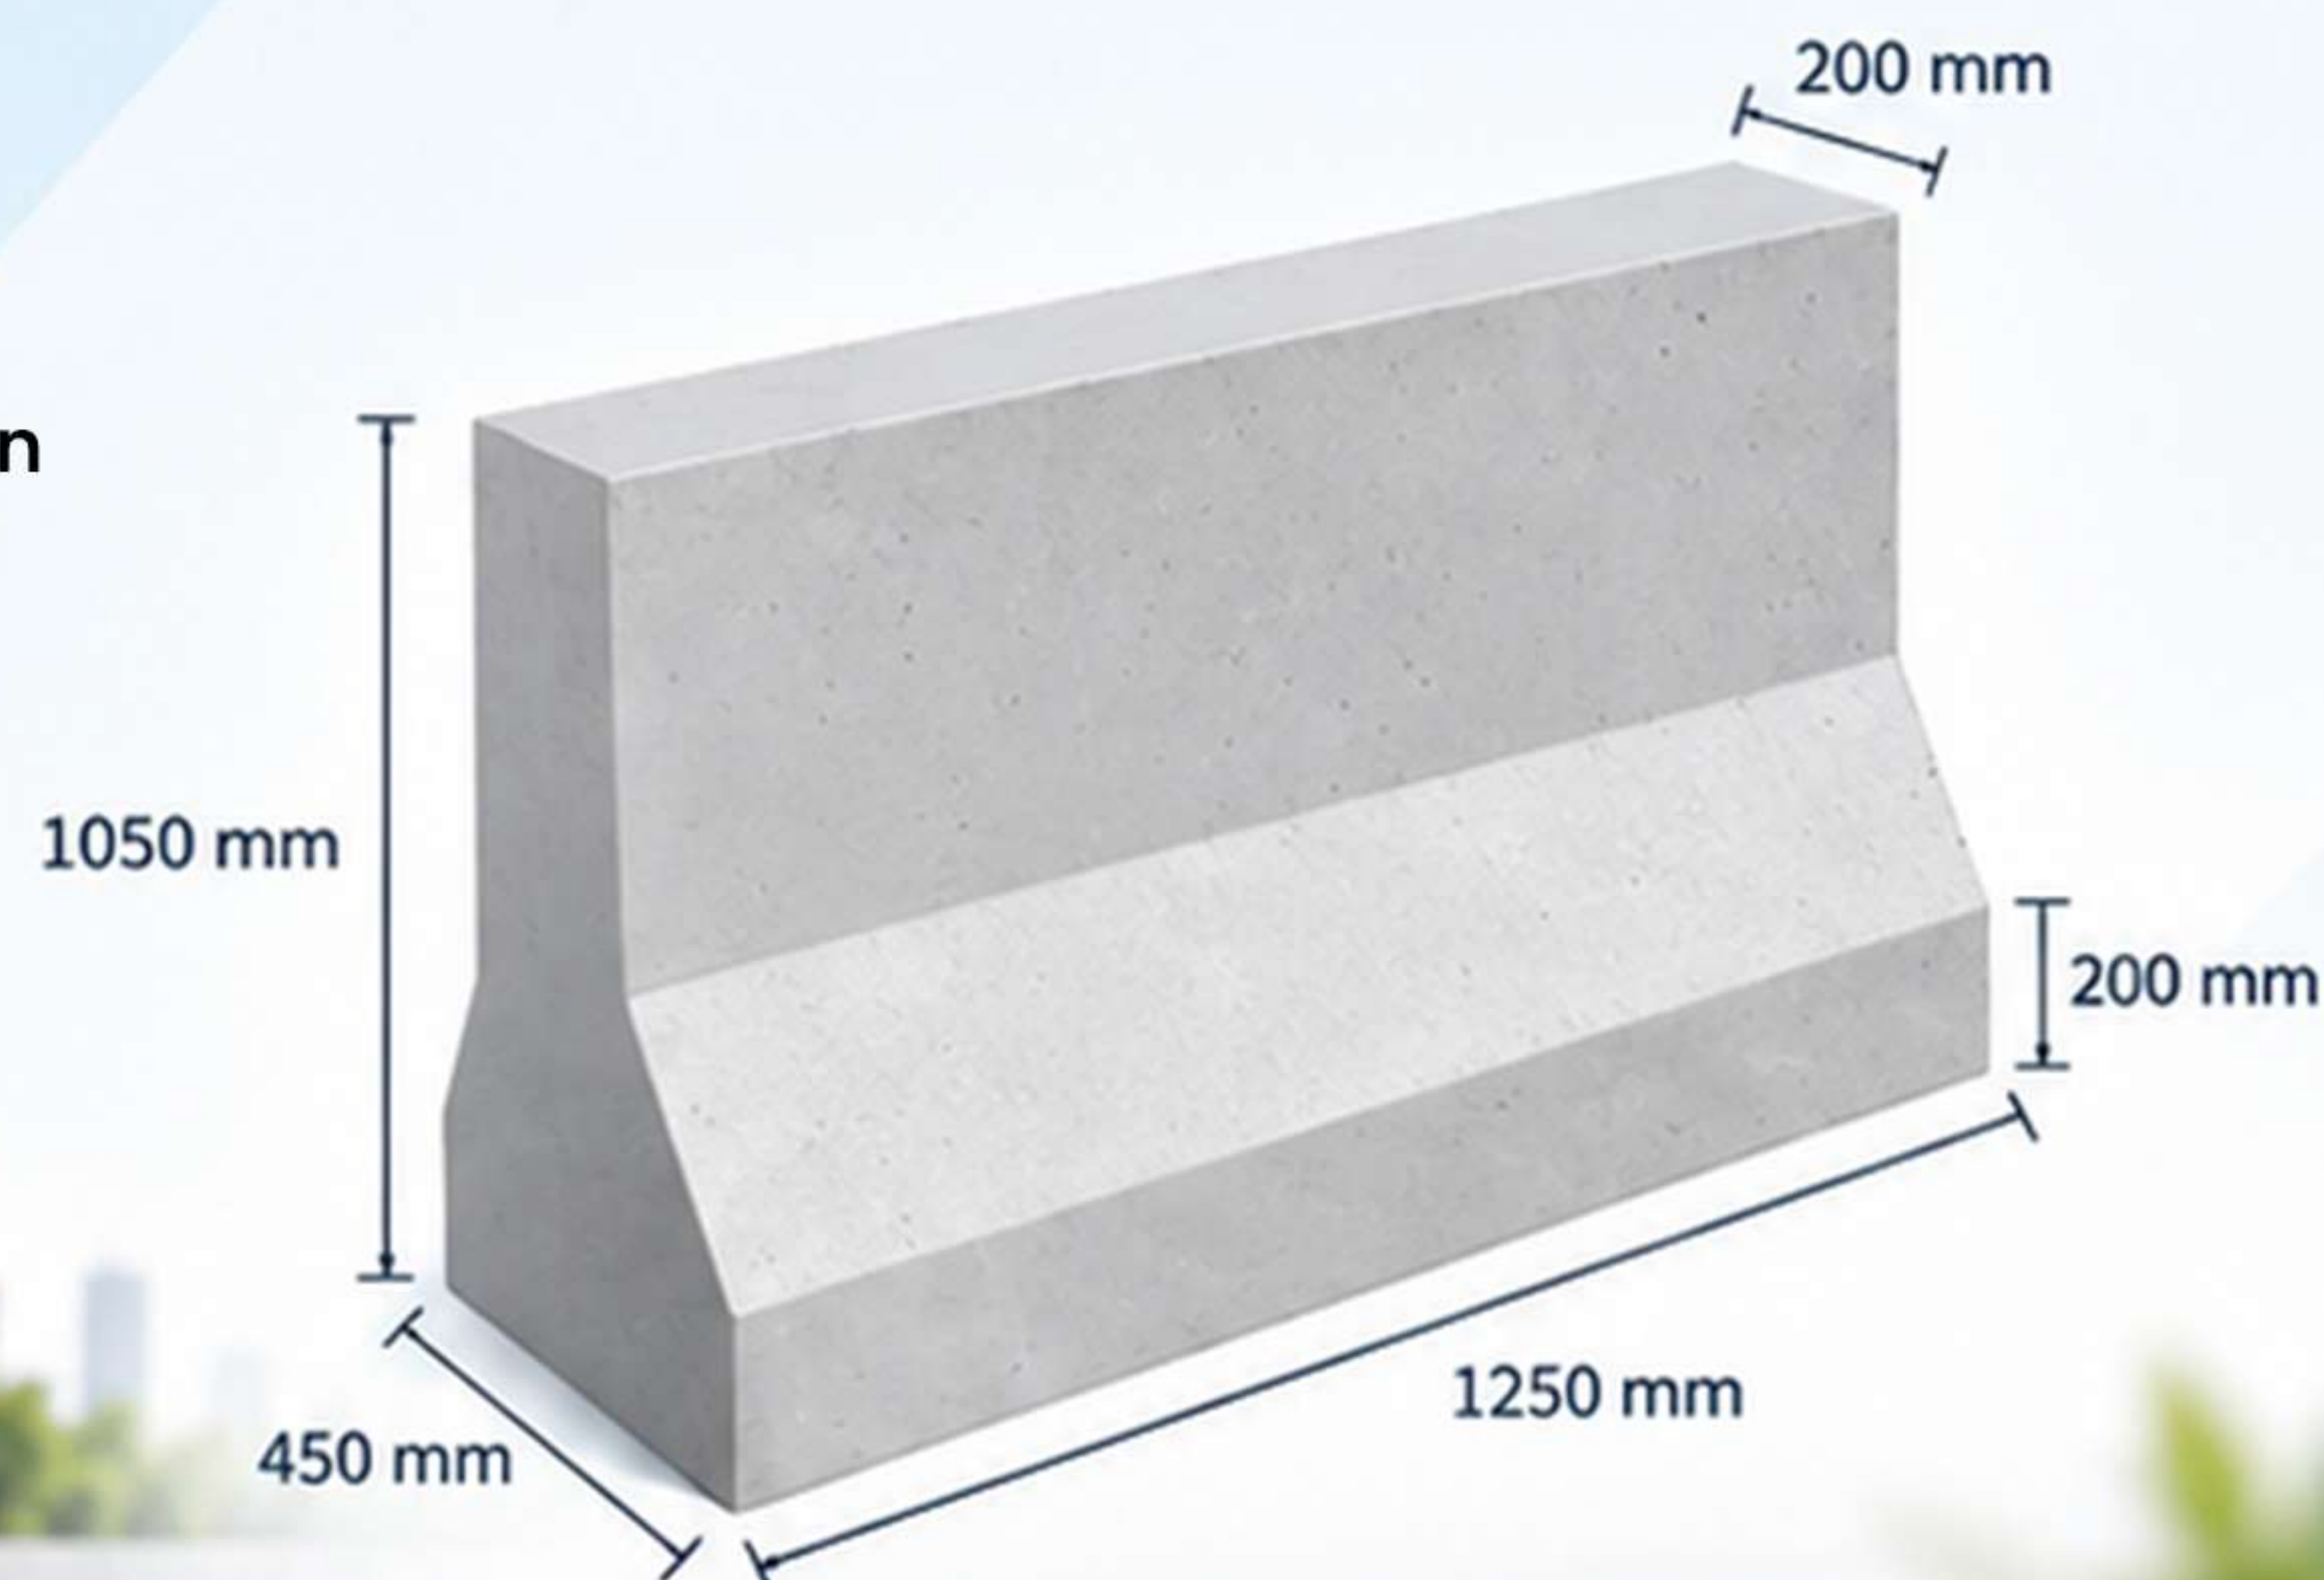

TYPE CB-1
1050 × 1250 × 450 mm

UTILITY MANHOLE

Strong. Precise. Built for Underground Networks.

Engineered precast utility manholes and covers provide a reliable solution for underground infrastructure. Designed for quick installation, dependable strength and long service life, these systems provide efficient access to cable, communication and utility networks.



SQUARE MANHOLE

Precision-built access chambers for utility infrastructure

Square precast manholes feature accurately manufactured edges and a robust construction, providing secure access and dependable performance for underground installations.

Available Sizes:

- 600 × 600 × 1000 mm
- 900 × 900 × 1200 mm



RECTANGULAR MANHOLE

Practical access for larger utility layouts

Rectangular manholes provide flexible access for cable routing, inspection and maintenance within underground utility networks.

Available Sizes:

- 600 × 900 × 1200 mm





CIRCULAR MANHOLE

Strong, compact and built for underground access

Circular precast manholes offer a durable solution where round access chambers are preferred, providing smooth internal geometry and reliable access to underground installations.

Available Sizes:

- 900 mm
- 1000 mm
- 1200 mm
- 1500 mm

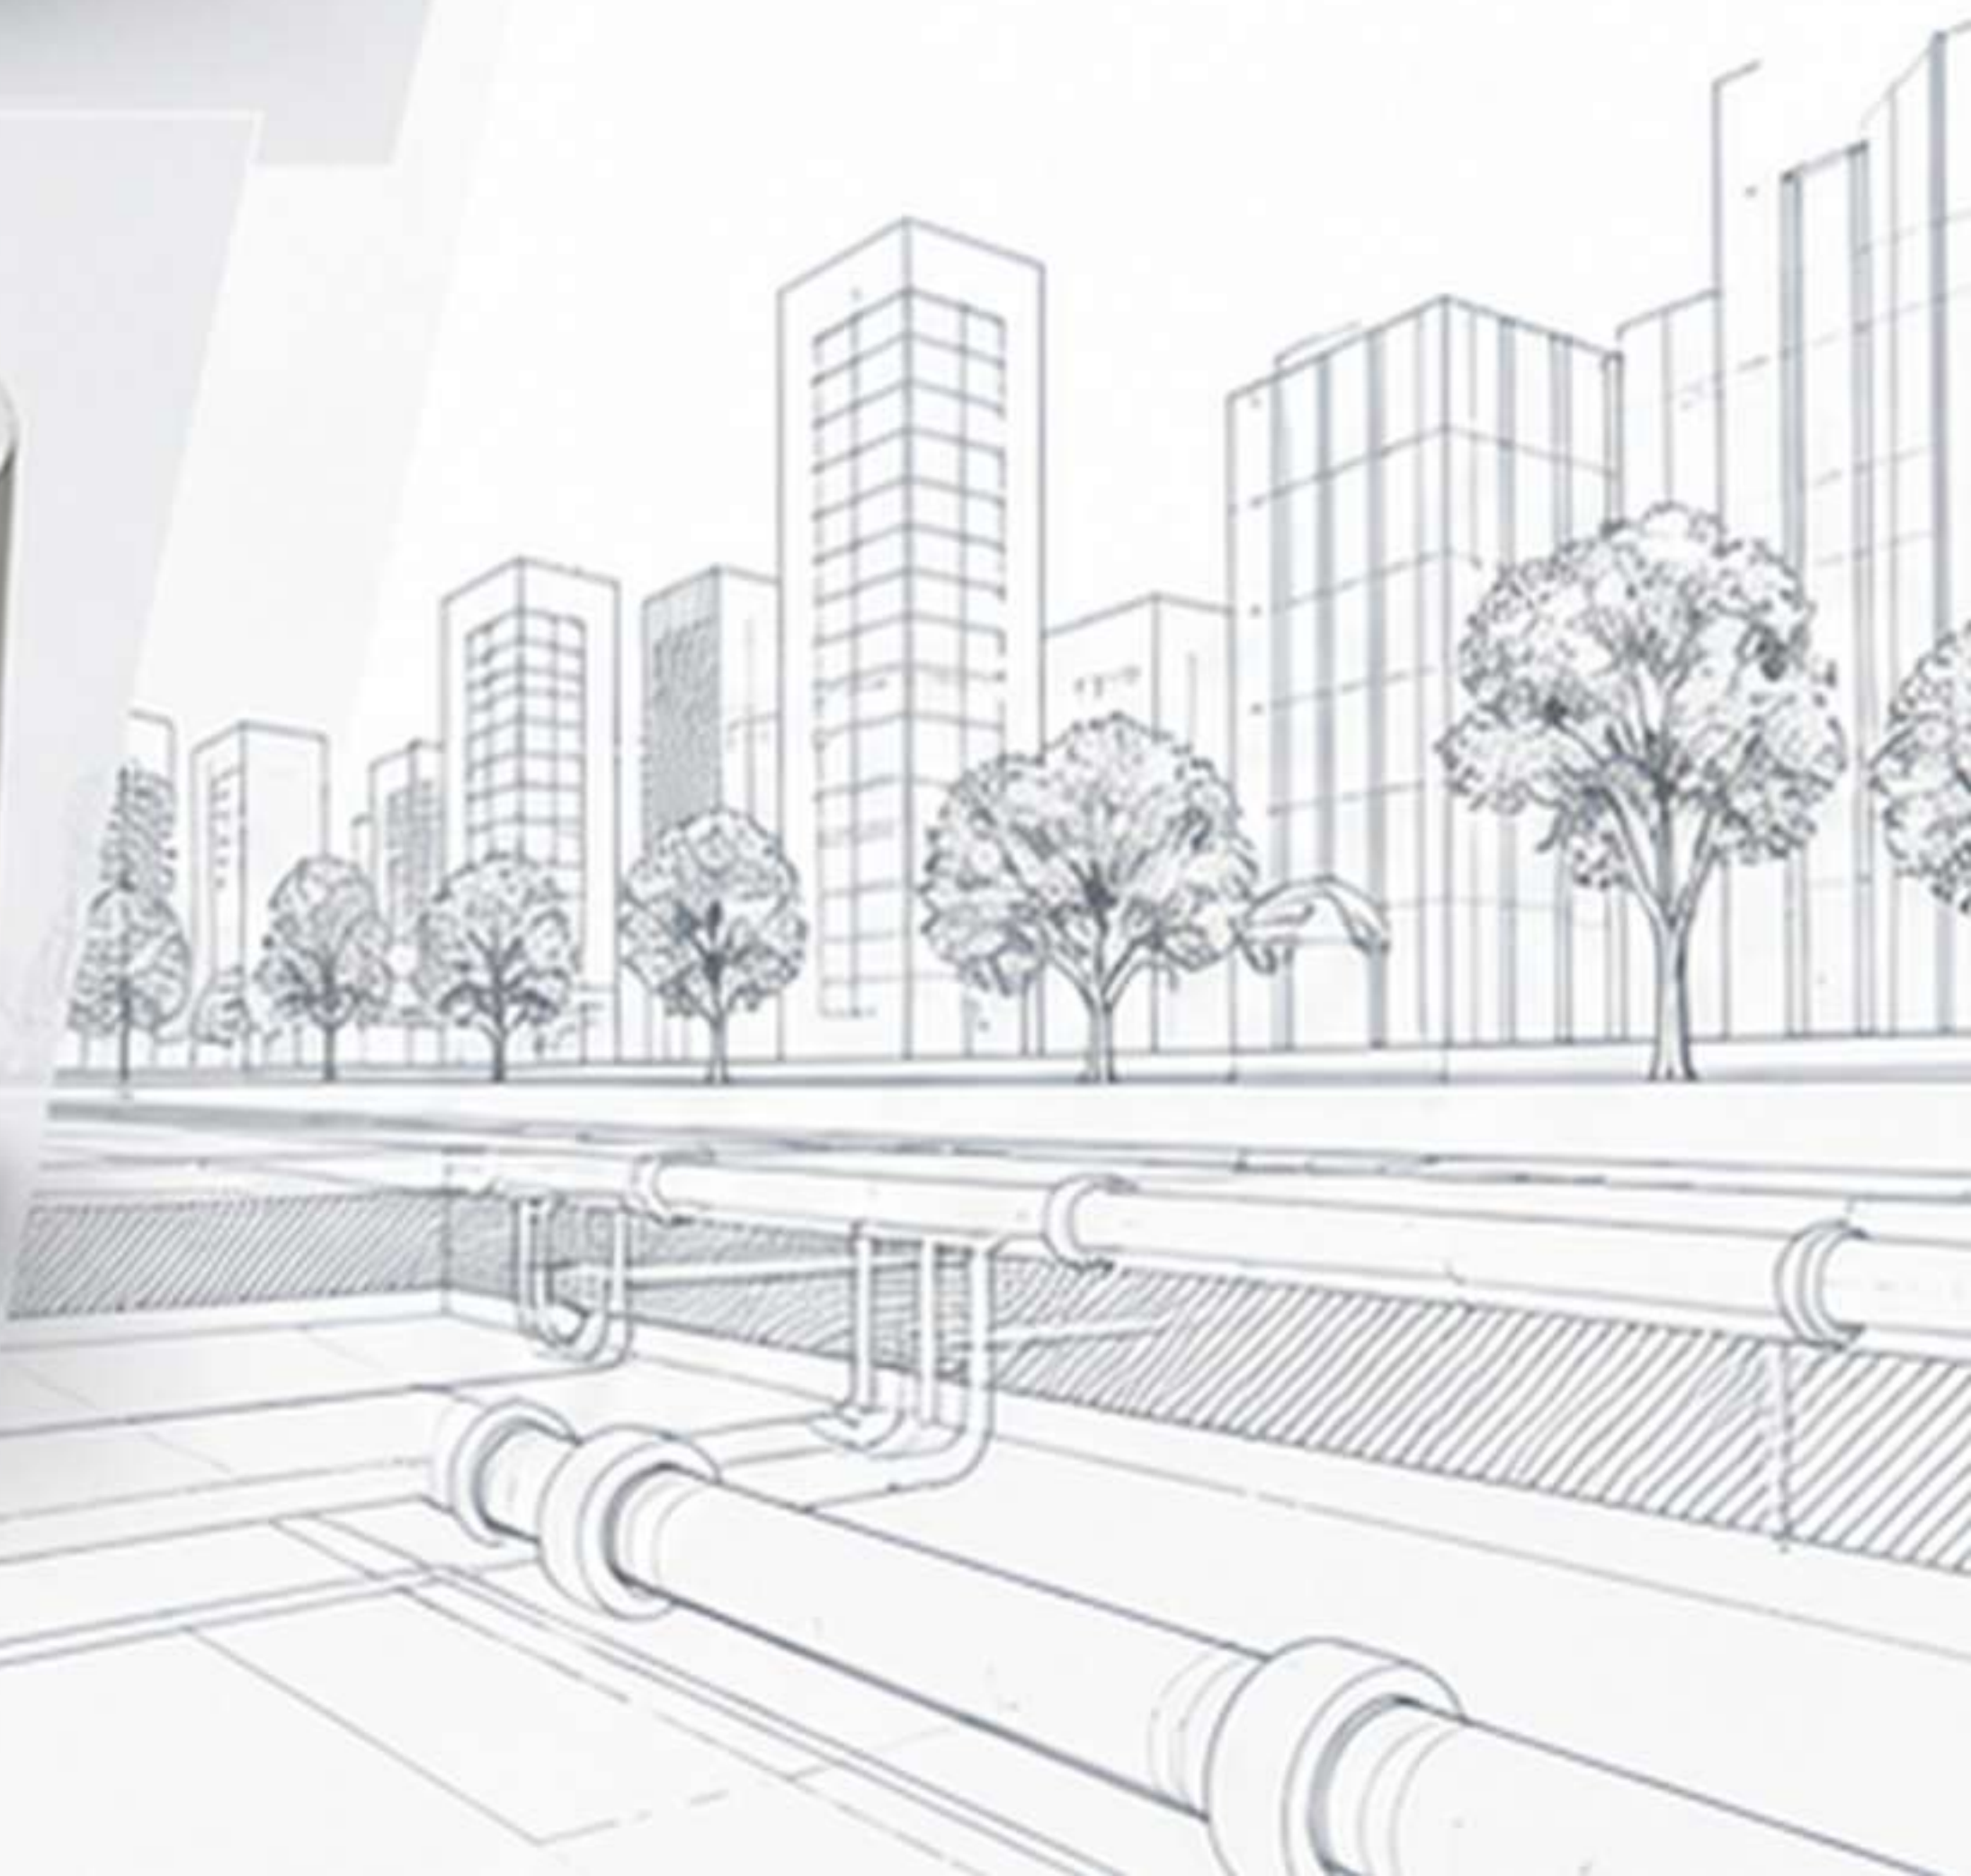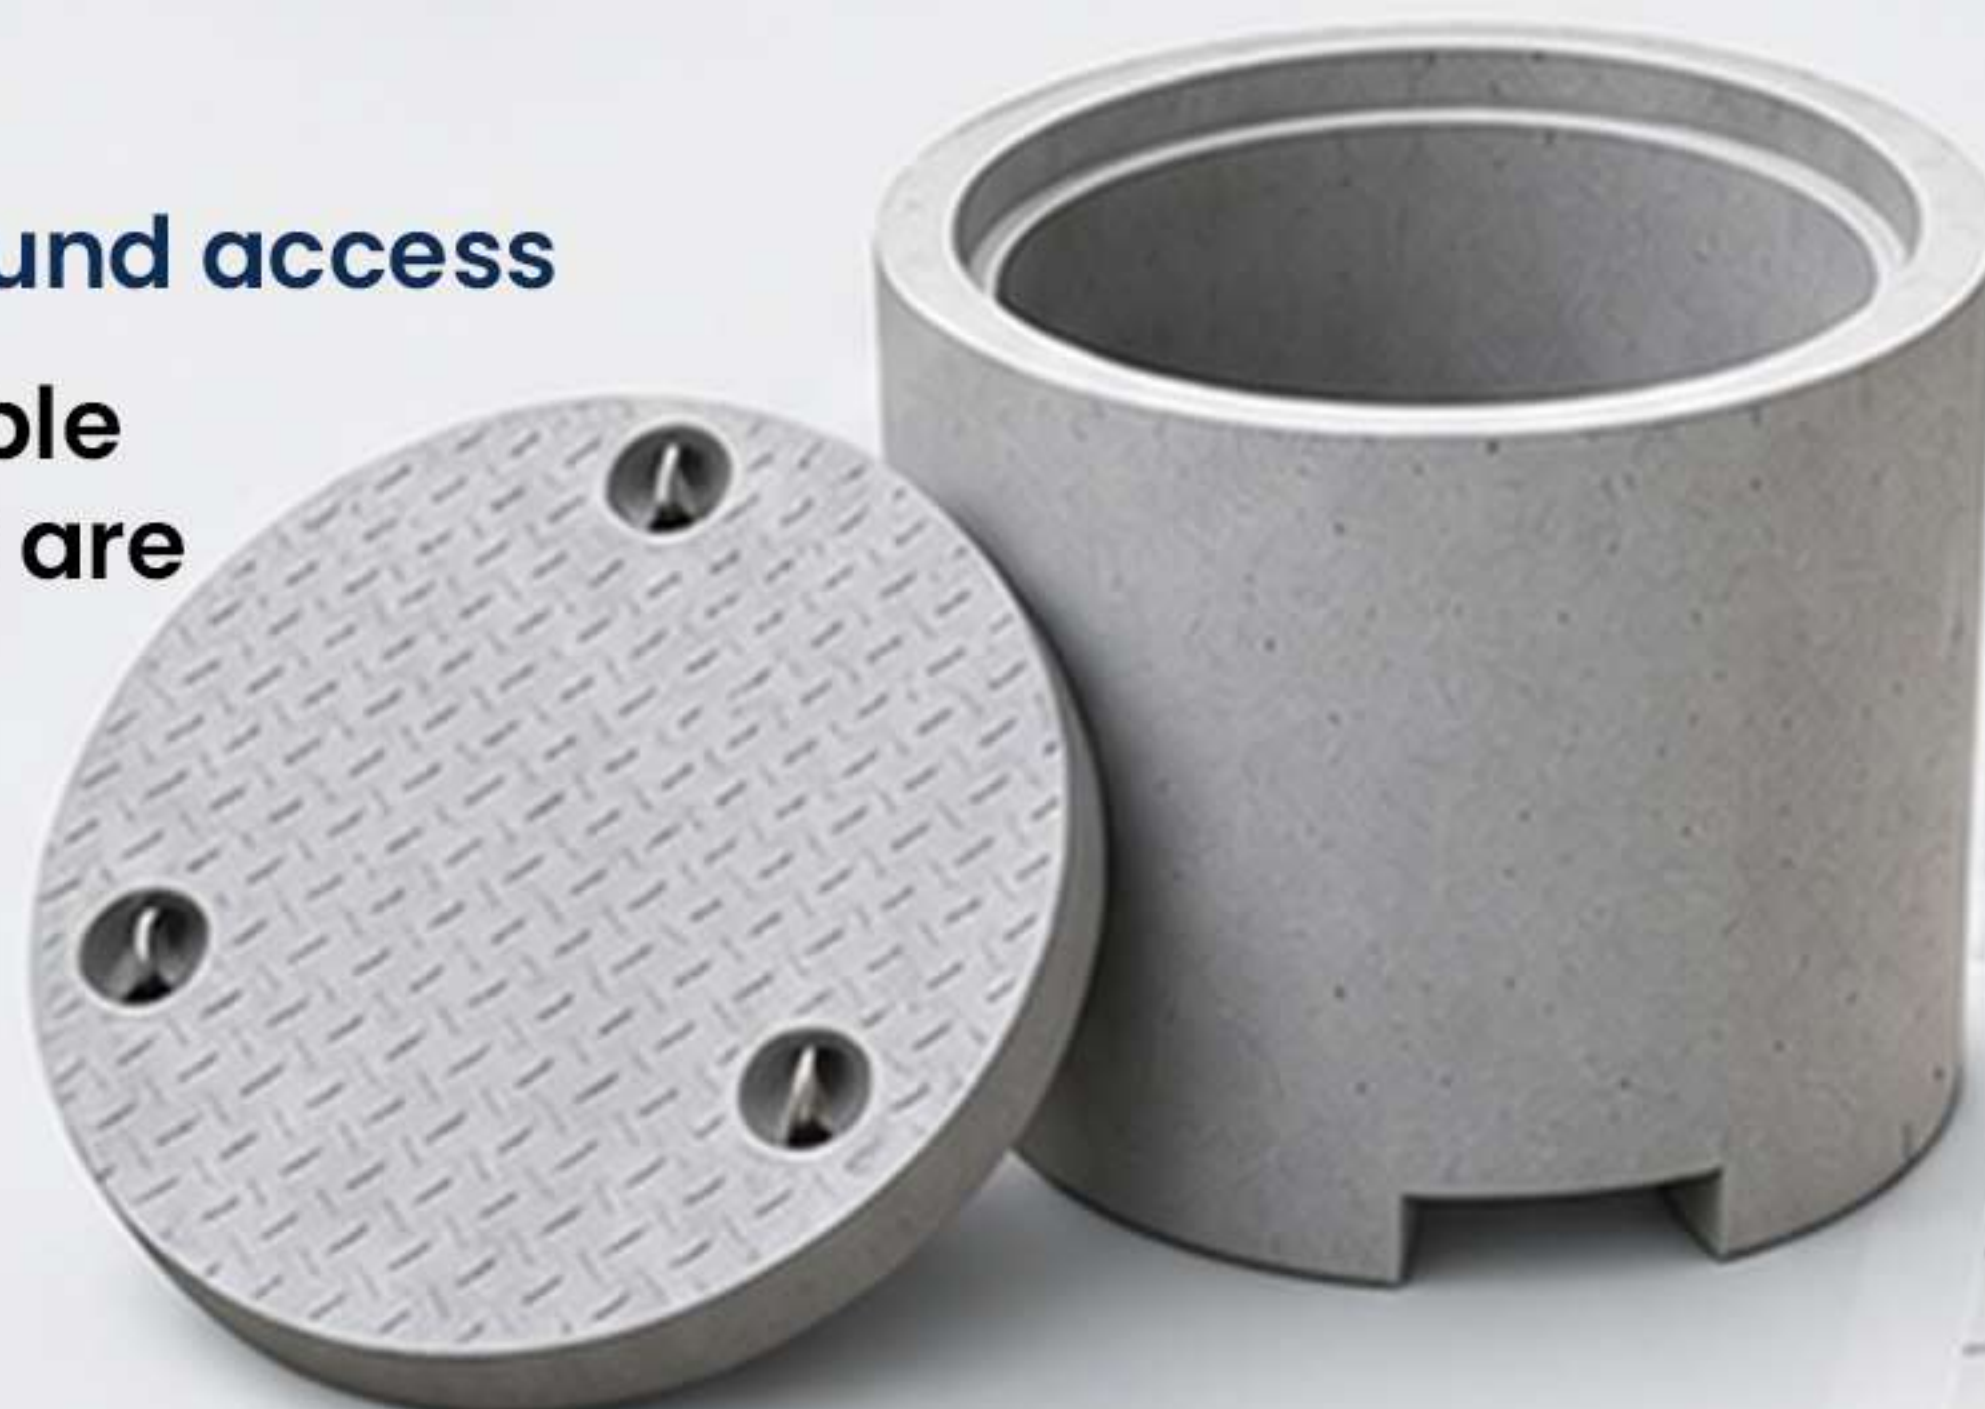

STORM WATER DRAIN CLEANING CHAMBER

Built for Reliable Underground Water Management

A precision-made precast concrete chamber designed to bring greater efficiency to underground drainage networks. It provides a dedicated point for collecting, directing and inspecting stormwater while allowing sediment and debris to settle within the system.



Precast Drain Chamber

A sturdy underground chamber designed to accommodate drainage connections while providing convenient access for inspection and maintenance.



Precast Cover Slab

A solid concrete lid designed to close and protect the chamber. Lifting hooks make handling and positioning easier during installation.

DIMENSIONS & PIPE CAPACITY

Available Configurations

Dimensions Outer	Dimensions Inner	Max Pipe Outer / Inlet Up-to Diameter
1140 mm × 1140 mm	900 mm × 900 mm	300 mm
1400 mm × 1200 mm	1050 mm × 850 mm	600 mm
1500 mm × 1500 mm	1150 mm × 1150 mm	700 mm
1600 mm × 1200 mm	1200 mm × 900 mm	900 mm
1150 mm × 850 mm	1400 mm × 800 mm	1000 mm

Custom configurations can also be developed to meet specific project requirements.



PRECAST CATCH PIT

Designed to Capture. Built to Last.

A precast catch pit provides a collection point within surface-water drainage systems. Incoming water enters through the connected pipe while heavier sediment and debris settle at the bottom, allowing accumulated material to be removed periodically. The system can be used as a practical collector and filtration point for land drainage, particularly where conventional geo-membrane systems are not being used.

Catch Pit Sizes:

- 300 mm × 300 mm × 400 mm
- 450 mm × 450 mm × 450 mm
- 500 mm × 650 mm × 600 mm
- 600 mm × 600 mm × 600 mm

PRECAST COMPOUND WALL

**Built strong.
Installed fast.
Made to last.**

Pre-engineered concrete wall systems designed for secure boundaries, faster installation, and dependable long-term performance.

Engineered for:

- Industrial
- Residential
- Commercial
- Infrastructure



RCC COLUMN

Precast concrete column with groove for panel fitting.



WALL PANEL

RCC solid panel /
Prestressed hollow-core panel.



100 mm
THICK

RCC SOLID PANEL



150 mm
THICK

PRESTRESSED
HOLLOW CORE
PANEL

DESIGNED FOR REAL-WORLD SITES



Simple Assembly

Factory-made components enable efficient on-site installation.



Flexible Layout

Multiple heights and column arrangements accommodate different site conditions.



Consistent Finish

Precision-manufactured panels provide a uniform wall appearance.



Strong Construction

High-quality concrete delivers dependable structural performance.



Long Service Life

Designed for durable performance with limited maintenance.

Available Configuration:

- Column spacing: 3 m – 6 m
- Wall heights: 1.8 m | 2.4 m | 3.0 m
- RCC solid panels: 100 mm
- Prestressed hollow-core panels: 150 mm

Configurations can be adapted to project requirements.

PRECAST BOX CULVERT

**STRONG. SPACIOUS.
BUILT TO PERFORM.**

Precast box culverts are engineered for efficient conveyance of water with higher flow capacity and superior structural strength. Designed for quick installation and long service life, they are an ideal solution for modern infrastructure and drainage systems.



HIGH STRENGTH

Engineered for maximum load capacity and durability.



FASTER INSTALLATION

Precast units ensure quick and hassle-free installation.




HIGH FLOW CAPACITY

Handles large volumes of water efficiently.



COST EFFECTIVE

Lower maintenance and long-term cost savings.

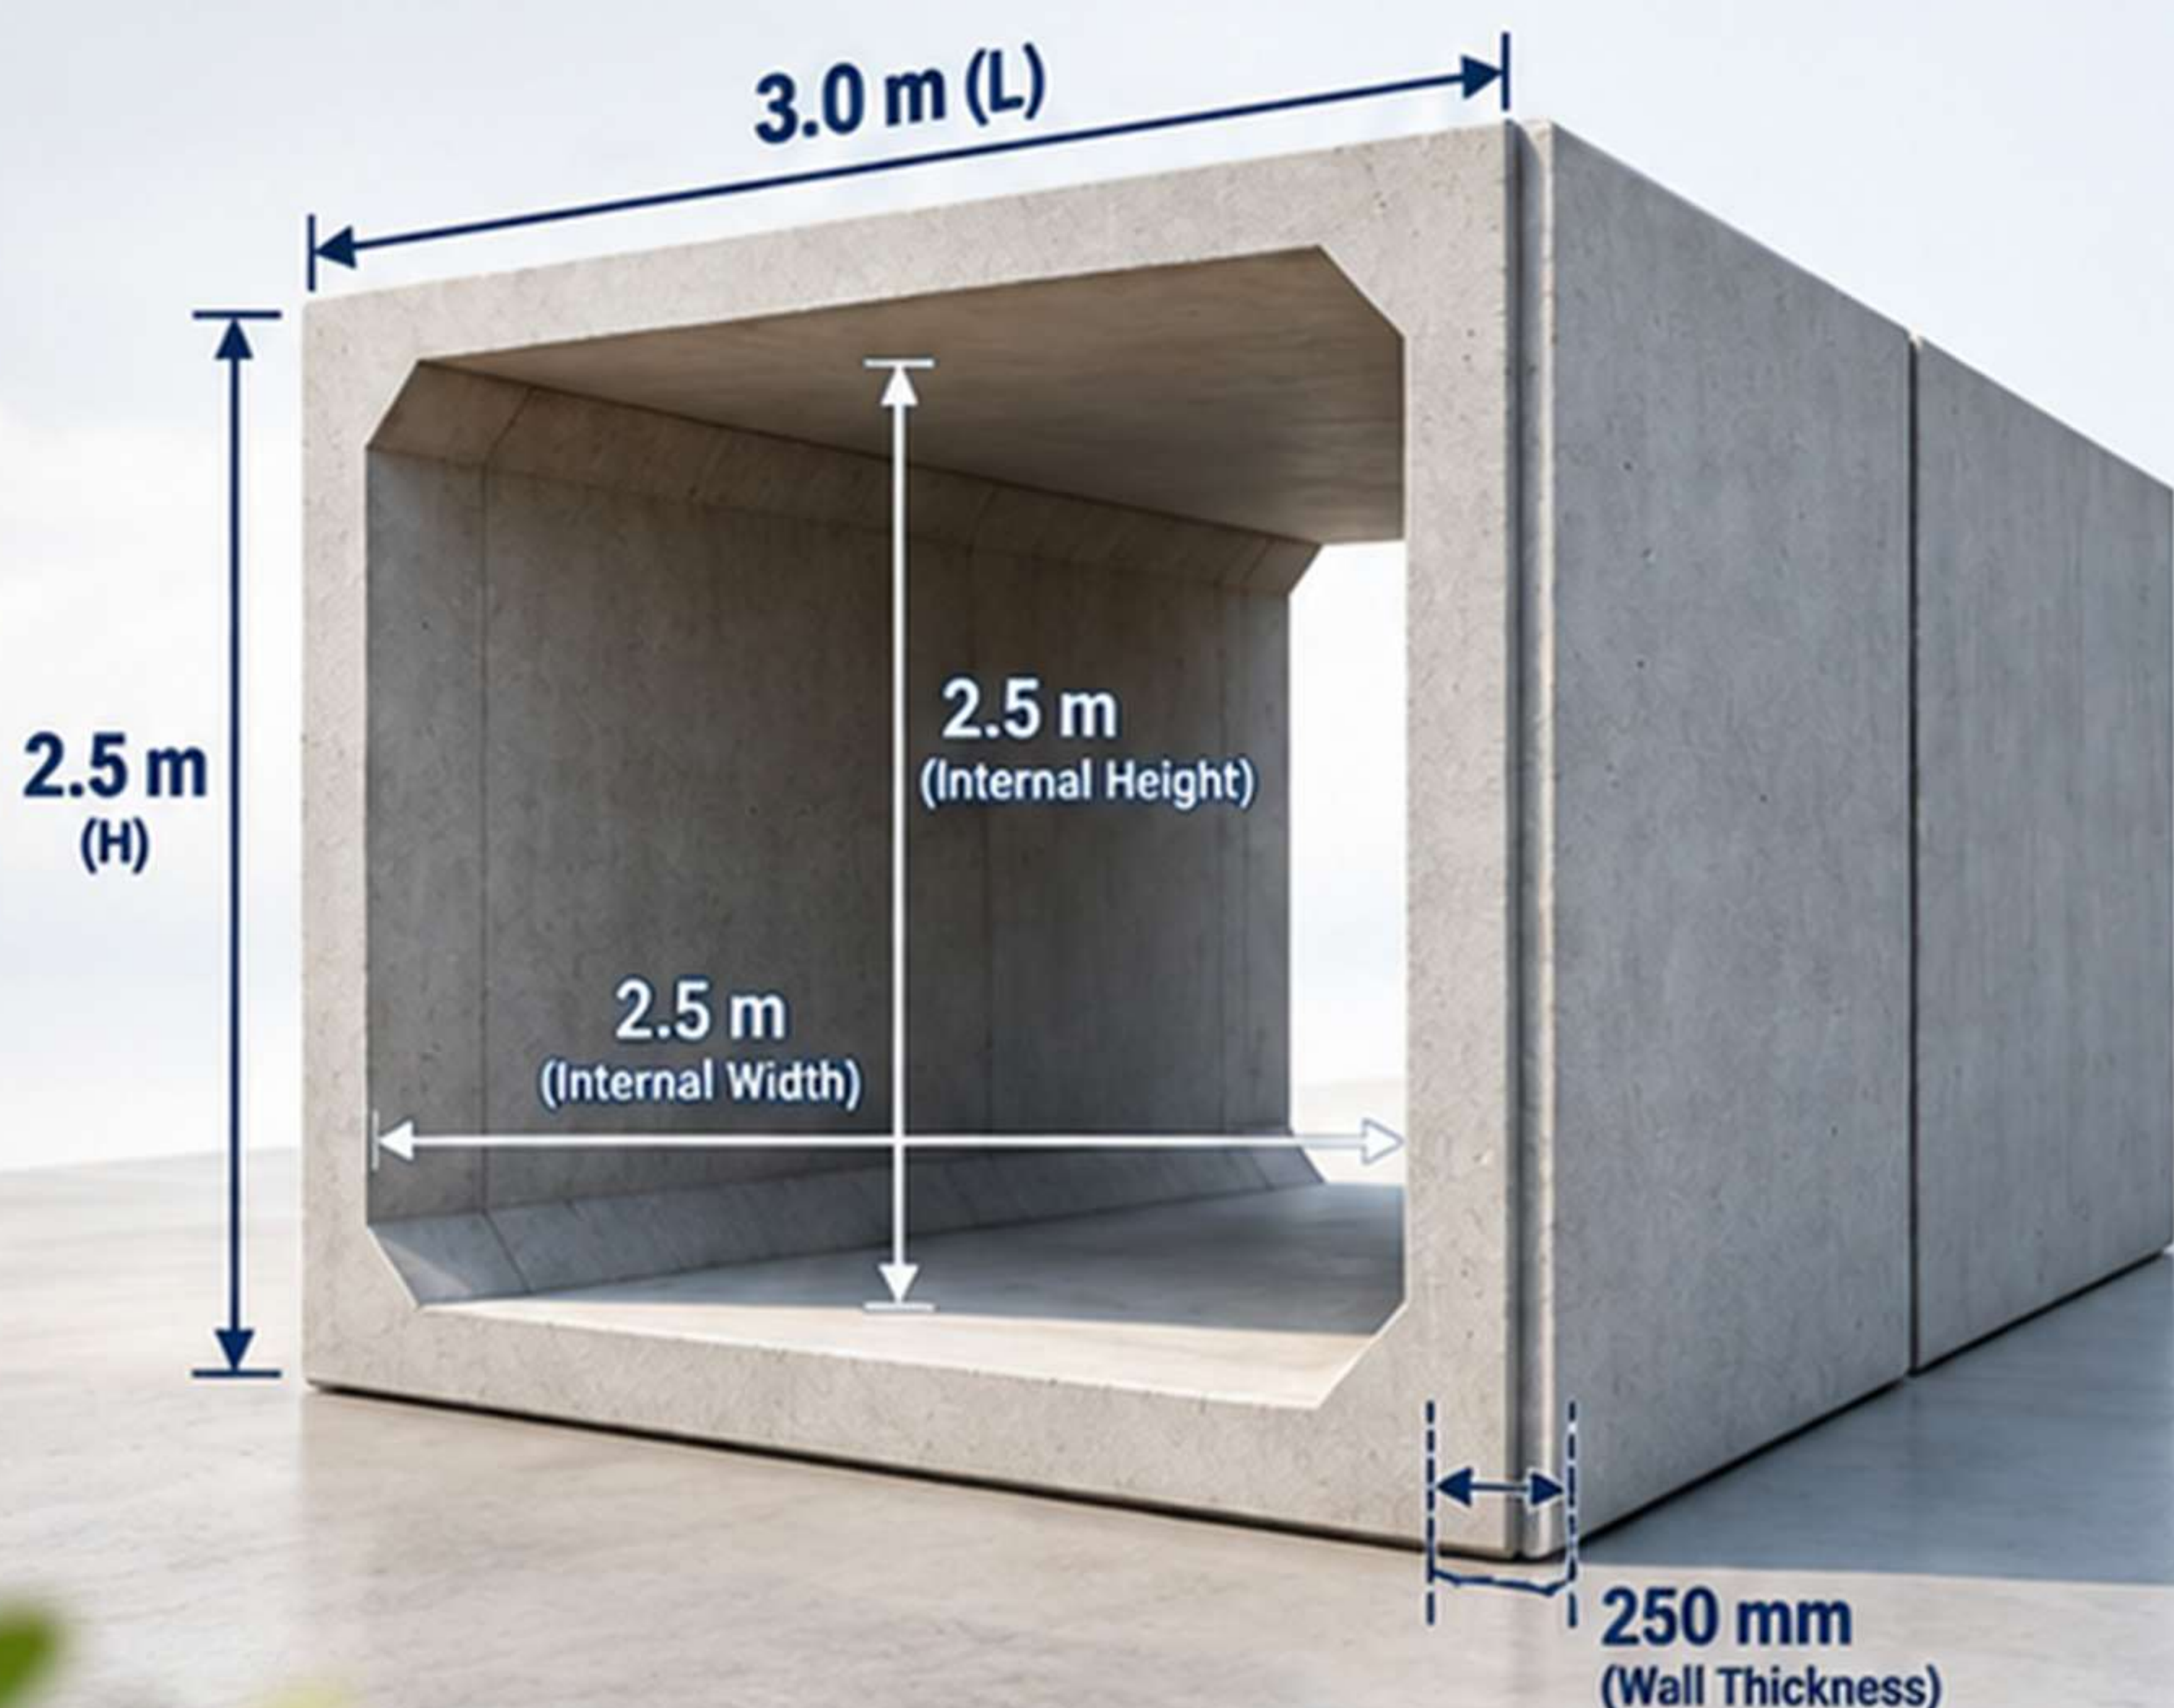

STANDARD SIZE

Technical Dimensions

- Internal Height (H): 2.5 m
- Internal Width (W): 2.5 m
- Length (L): 3.0 m
- Wall Thickness: 250 mm

Drawing Dimensions

- Overall Height: 2.5 m
- Internal Height: 2.0 m
- Internal Width: 2.5 m
- Length: 3.0 m
- Wall Thickness: 250 mm

PRECAST POLE BASE FOUNDATION

Built for stability.
Designed for efficiency.

Precision-made concrete foundations designed for secure pole installation with reduced site work, consistent quality and dependable structural support.

HOW IT WORKS

A quick and straightforward 3-step process for a strong and stable foundation.



BUILT FOR EFFICIENCY

Precast pole base foundations help reduce on-site work while ensuring a clean, secure and long-lasting installation.

- Minimizes excavation and concreting work
- Neat and clean site after installation
- Consistent quality and accurate dimensions
- Ideal for lighting poles, signages, utility poles and more

SPECIFICATIONS

POLE HEIGHTS	4.5 / 6 / 7.5 / 9 / 12 M
SHAPES	500 MM HEXAGONAL / 400 MM ROUND
OPTIONS	WITH / WITHOUT FOUNDATION BOLTS & NUTS
PROVISION	DWC DUCTING FOR ELECTRICAL CABLES

AVAILABLE SHAPES & SIZES




Stronger. Safer. Smarter Choice.

A photograph of a concrete manhole structure installed in a trench. The structure has a wide, flared top and a narrower body with three yellow handles visible inside. A large concrete pipe is connected to the side of the structure. The trench is filled with brown soil, and the background shows a city skyline with cranes and buildings under a blue sky.

AVAILABLE IN:

- ## Manhole 1000

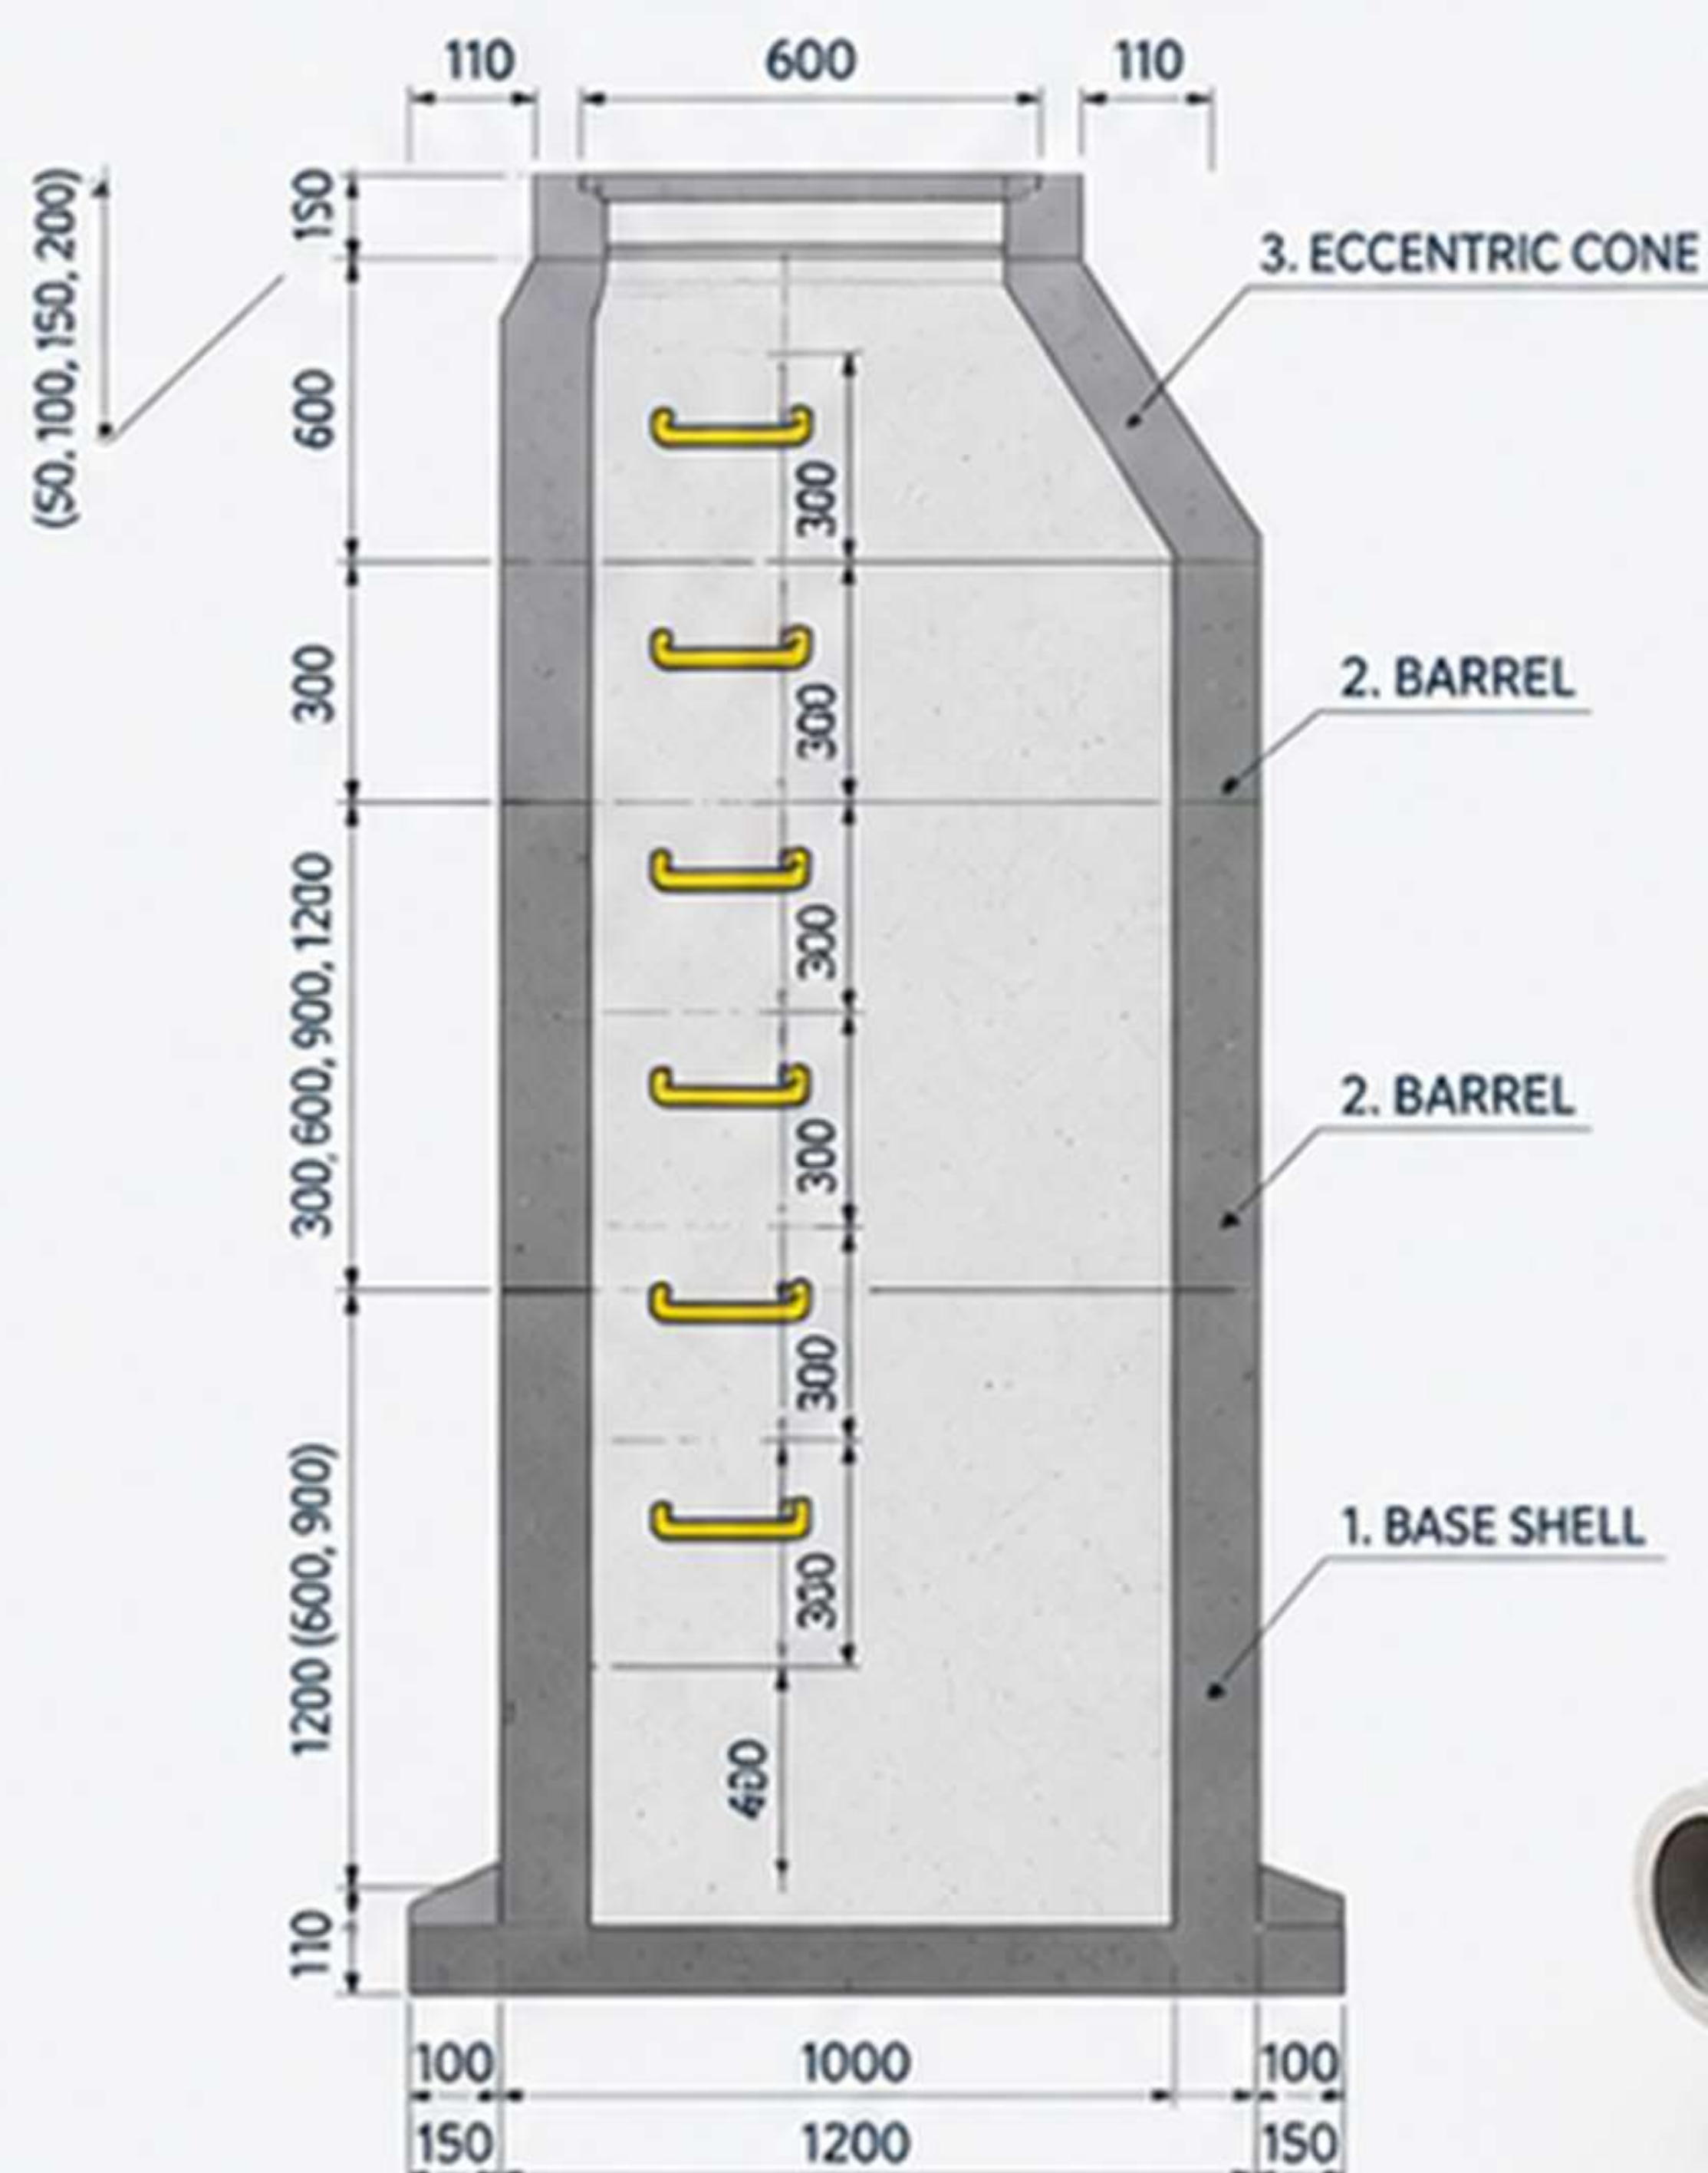

Easy and safe access
inside the manhole.



Precision joints prevent leakage and infiltration.



Integrated lifting hooks
for safe and convenient
handling.



EARTH PIT CHAMBER


**Reliable Access.
Simple Installation.
Built for Protection.**

Precast Earth Pit Chambers provide a clean, ready-to-install solution for housing earthing connections and enabling convenient inspection and maintenance. Designed for efficient site execution, these chambers eliminate the need for conventional masonry construction while providing a strong and durable enclosure.

Manufactured using quality concrete, the chamber offers a robust structure suitable for outdoor electrical and earthing installations. Its accessible design allows earthing resistance to be checked, recorded and maintained with ease.




AVAILABLE SIZES

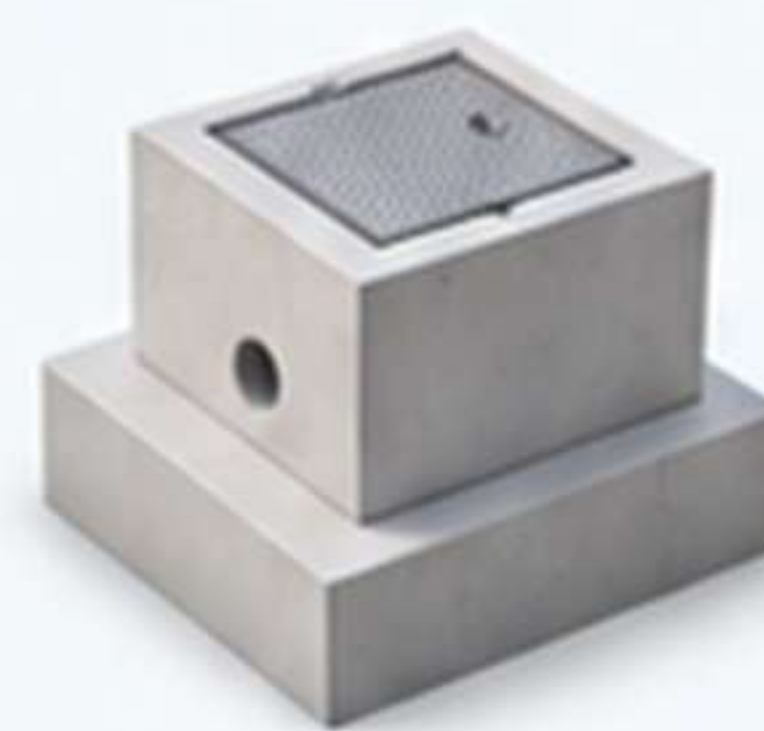

300 × 300 × 500 mm

Compact solution for standard earthing installations.

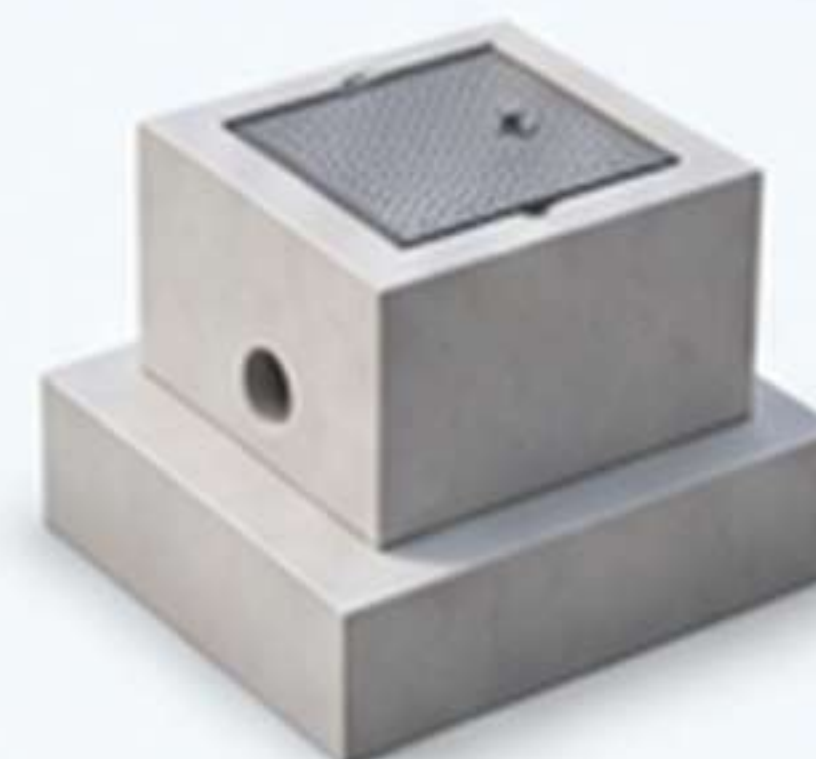

400 × 400 × 500 mm

Additional chamber space for larger installations.



600 × 600 × 600 mm

Larger format for applications requiring increased working space.



RELIABLE
EARTHING SOLUTION



QUALITY
PRECAST CONCRETE




MAINTENANCE-FRIENDLY
DESIGN


PREMIUM PAVING SOLUTIONS

ENGINEERED PAVING. BUILT FOR EVERY SPACE.

Transform driveways, walkways, landscapes and commercial spaces with precision-made concrete paving solutions designed for lasting performance.

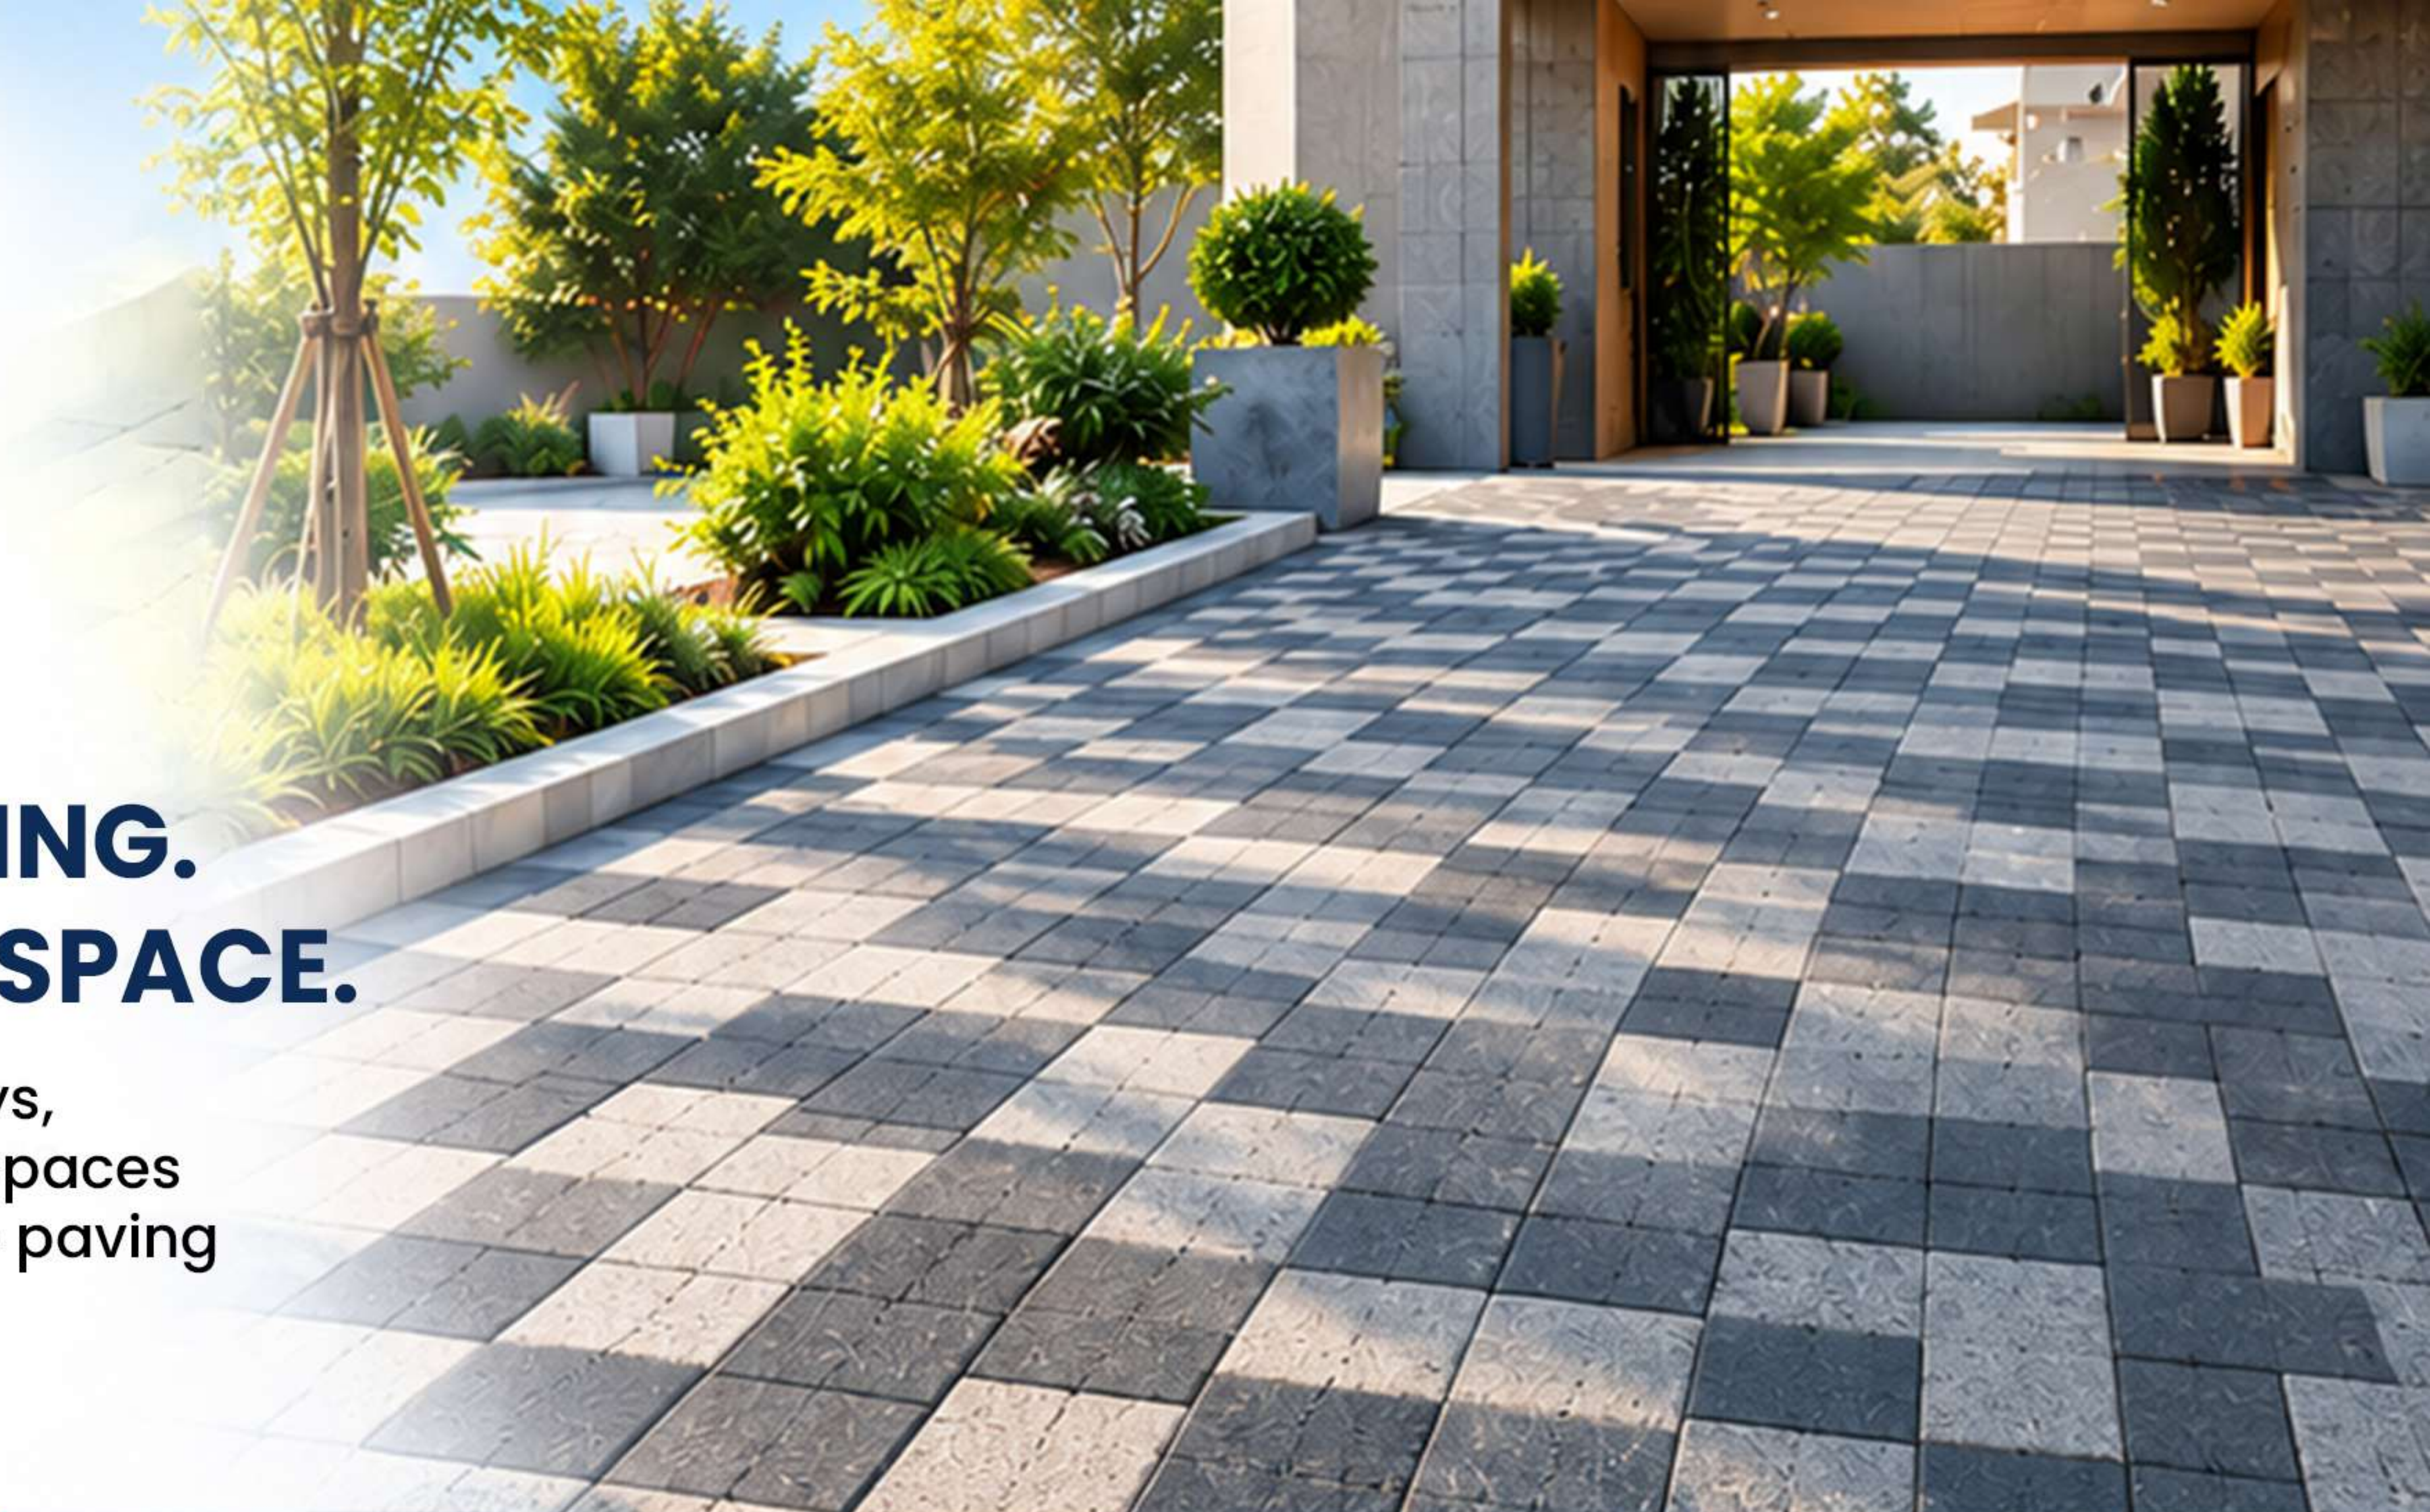

PATTERN COLLECTION

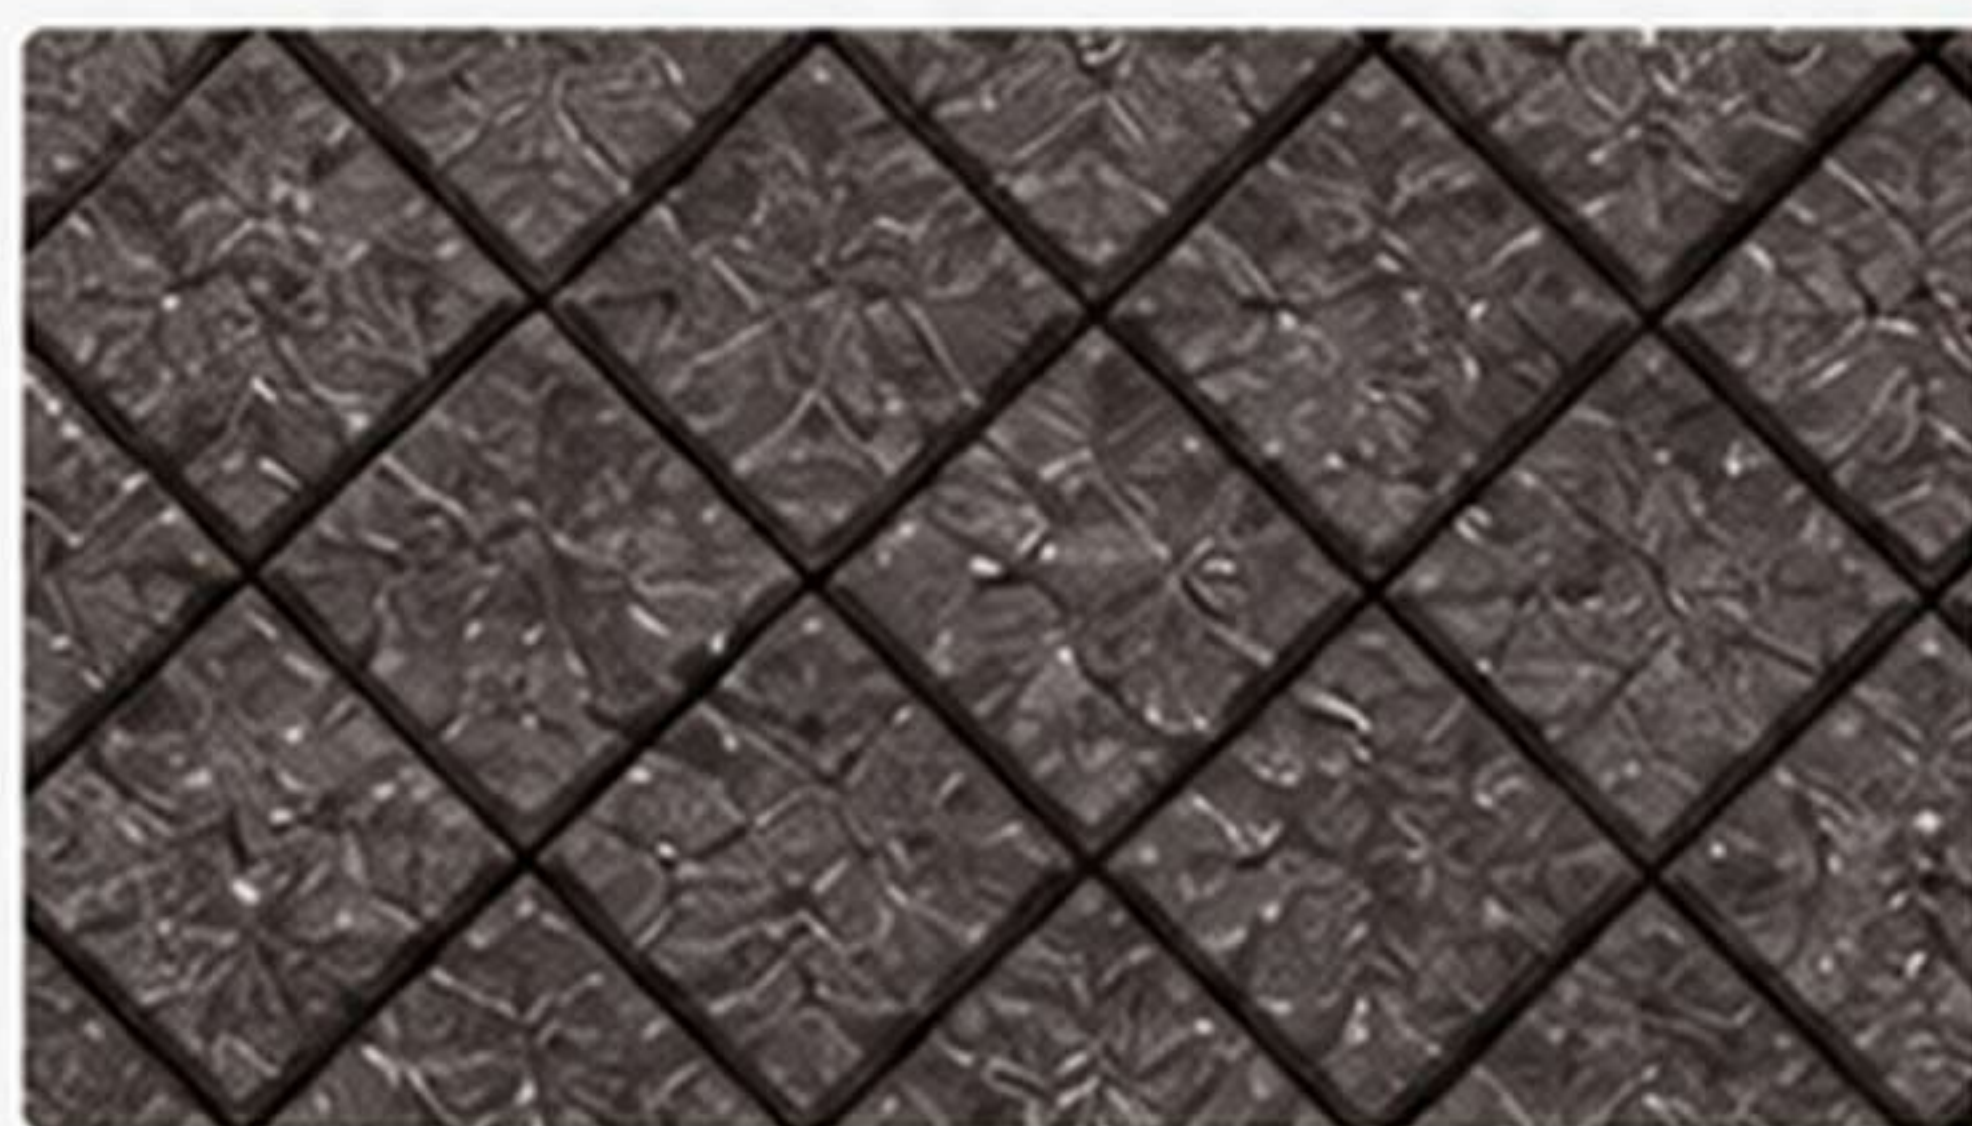

DIAMOND PATTERN

A geometric surface pattern that brings texture and visual depth to paved areas.

Thickness: 60 mm

Size: 100 mm × 100 mm

Available Colours:



HERRINGBONE PATTERN

A classic interlocking arrangement offering a structured appearance for pathways and paved surfaces.

Thickness: 60 mm

Size: 100 mm × 200 mm

Available Colours:



SQUARE BLOCK


A clean and balanced square layout suitable for contemporary outdoor spaces.

Thickness: 60 mm & 80 mm

Size:

- 60 mm × 200 mm × 200 mm
- 80 mm × 200 mm × 200 mm

Available Colours:

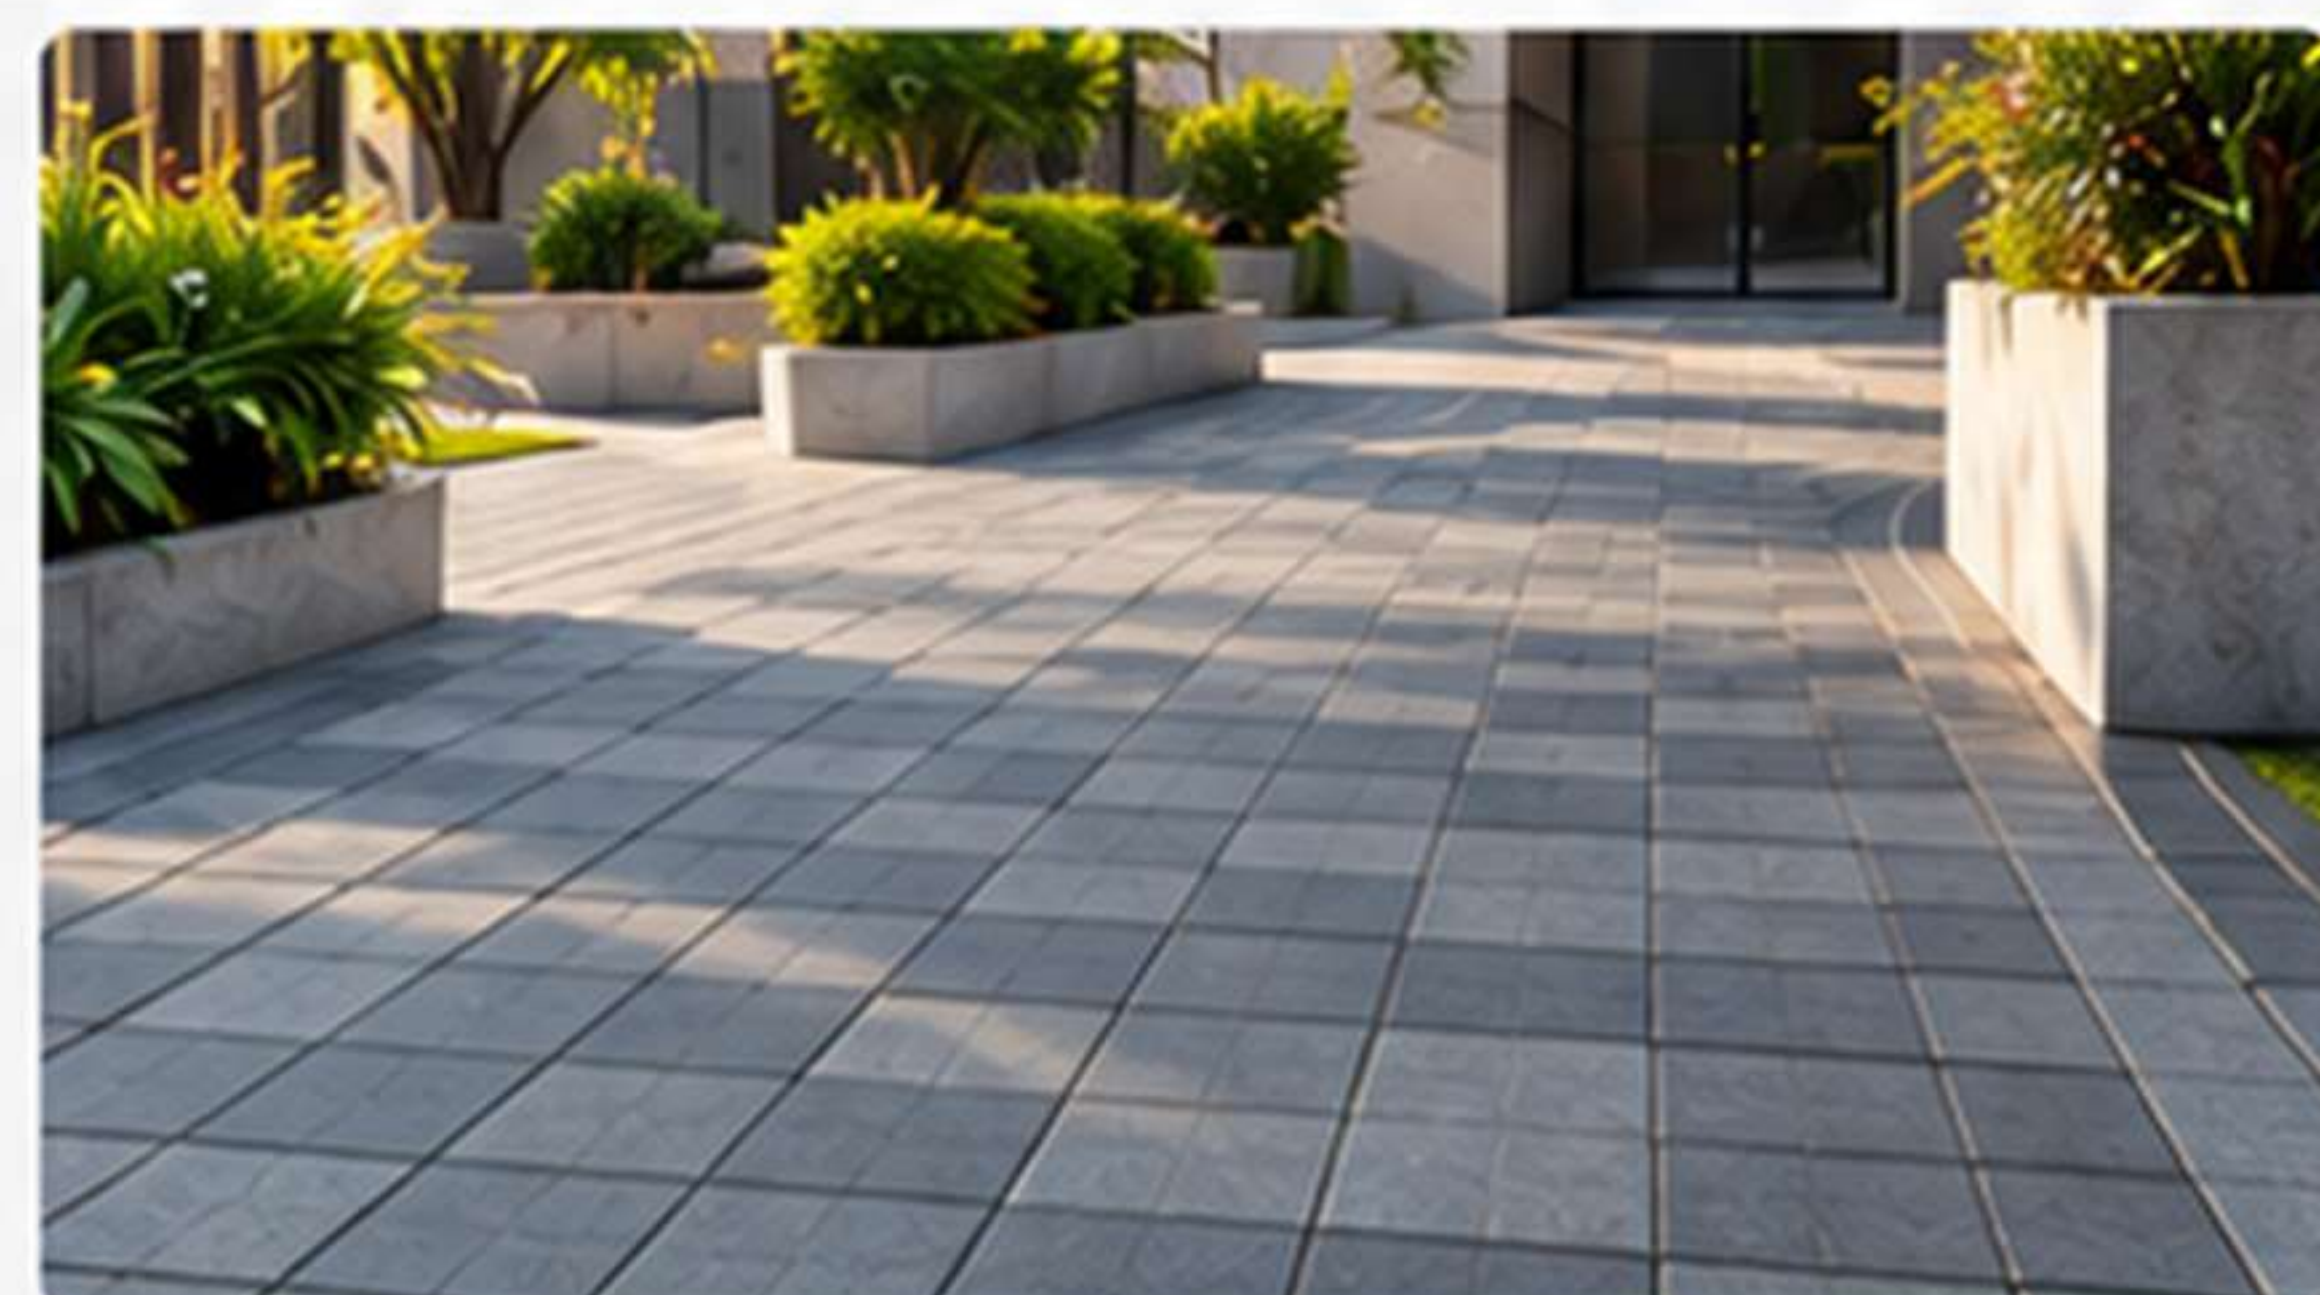


CHECKER PATTERN

Contrasting blocks create a simple yet striking visual rhythm for decorative and functional paving.

Thickness: 60 mm & 80 mm

Size: 150 mm × 150 mm

Available Colours:

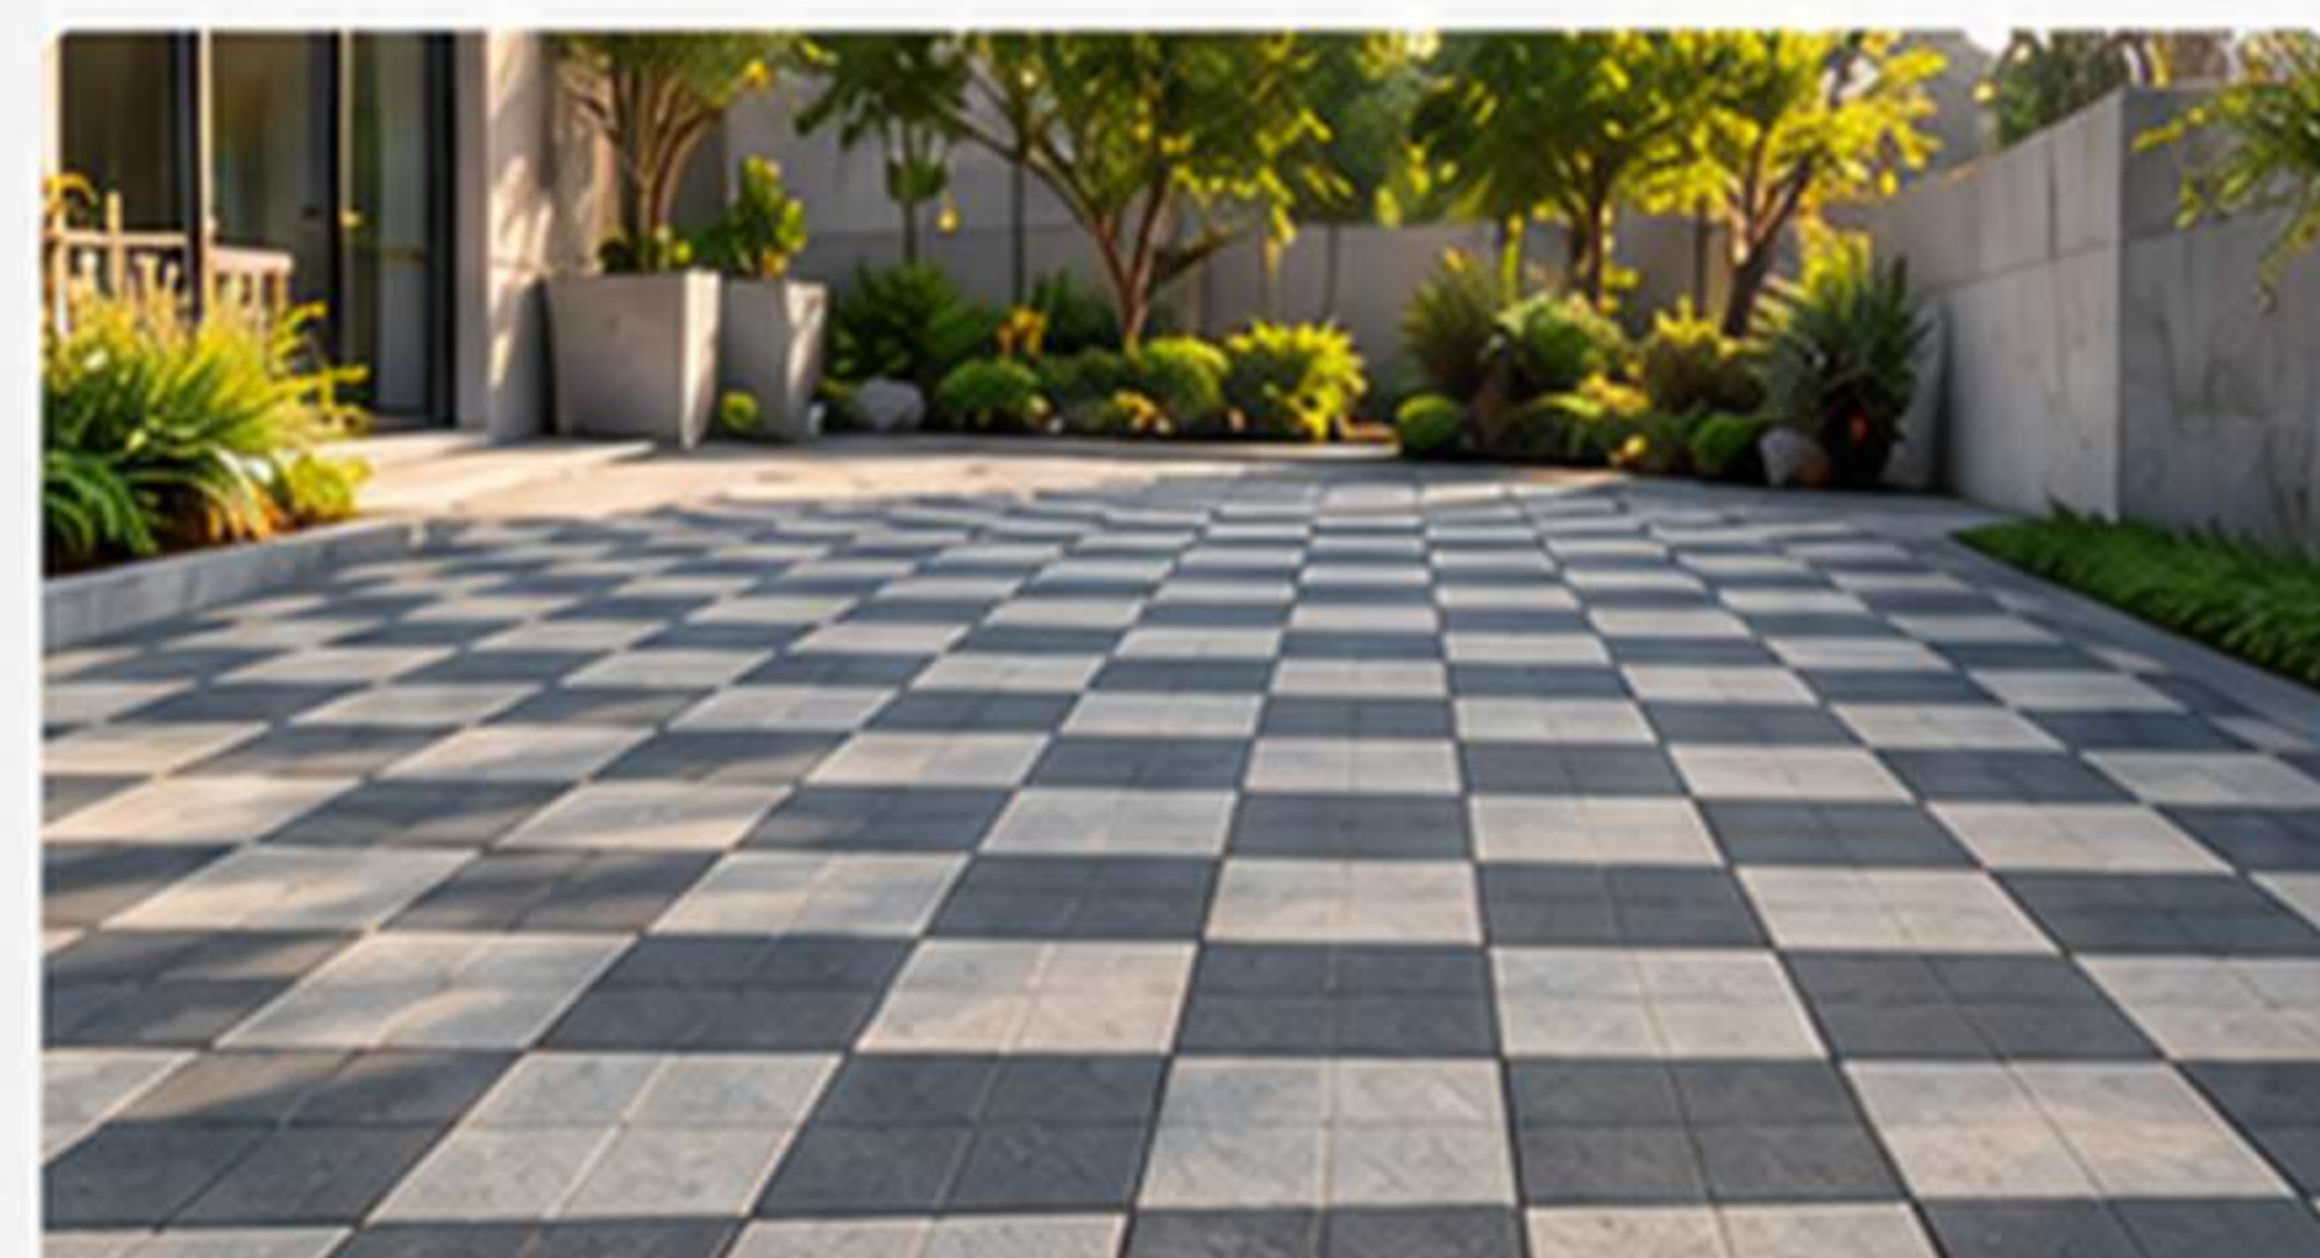



MIX PATTERN 01

A multi-block arrangement combining contrasting shades to create a distinctive paved surface.

Thickness: 60 mm & 80 mm

Size:

- 60 mm × 200 mm × 200 mm
- 80 mm × 200 mm × 200 mm

Available Colours:



MIX PATTERN 02

A versatile combination of rectangular blocks that creates a dynamic, textured paving appearance.

Thickness: 60 mm & 80 mm

Size:

- 60 mm × 200 mm × 200 mm
- 80 mm × 200 mm × 200 mm


Available Colours:



INTERLOCKING PAVERS

Strong interlocking pavers for ramps, driveways, walkways & heavy traffic areas.

SOLID INTERLOCKING PAVERS

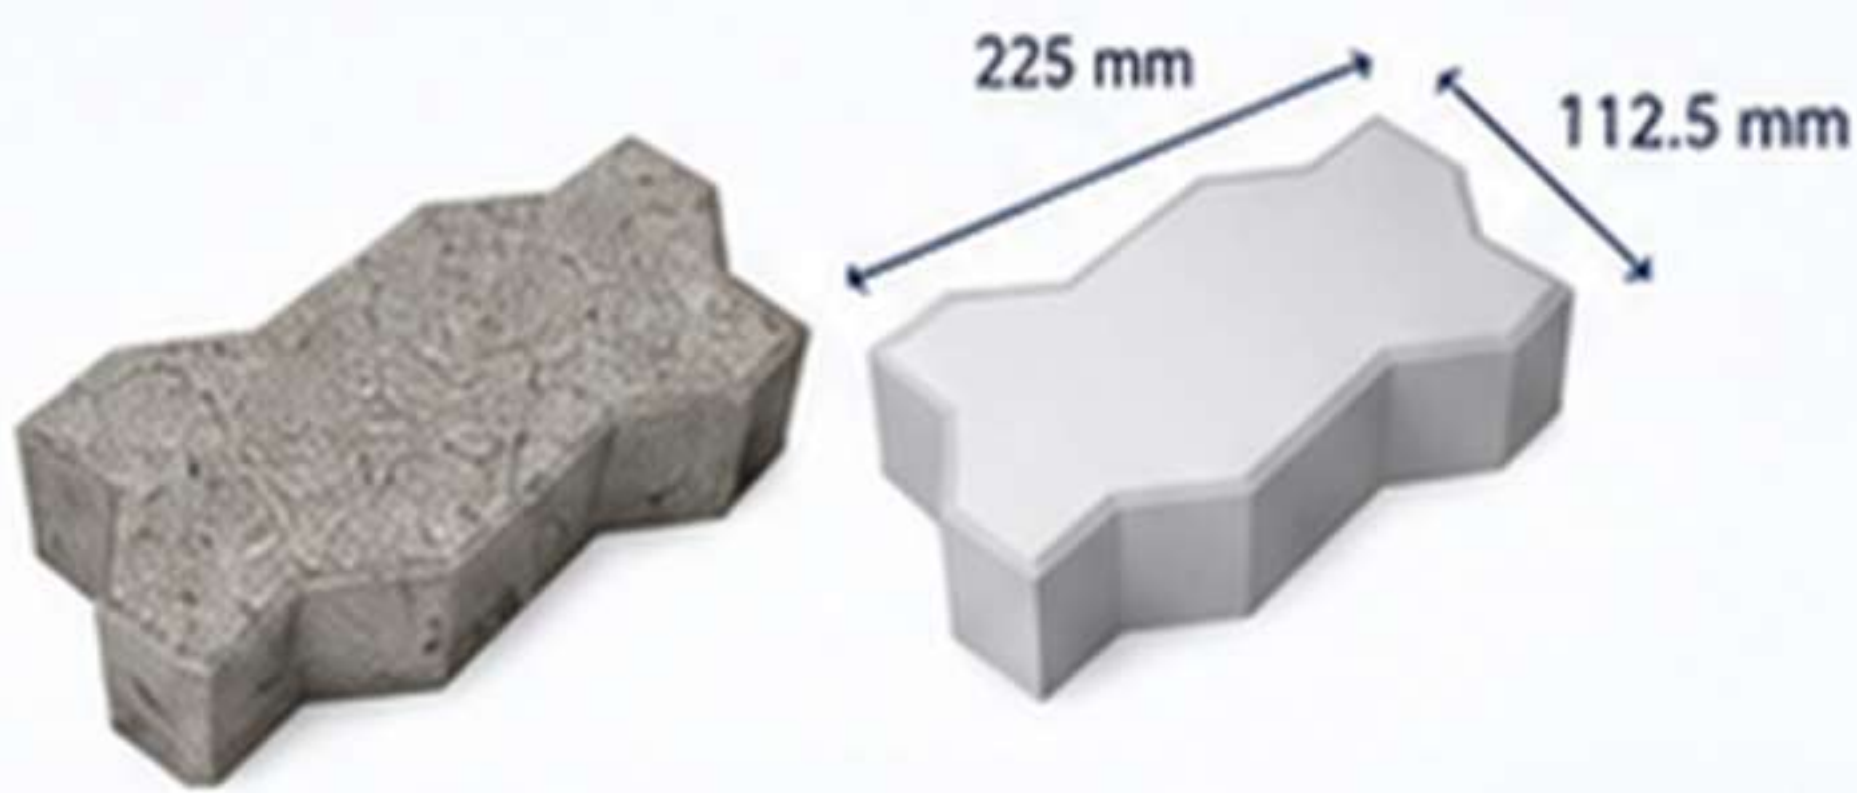


Dimensions:

- 225 mm × 112.5 mm

Available Thickness:

- 60 mm • 80 mm • 100 mm • 120 mm

SOLID RECT INTERLOCKING PAVER

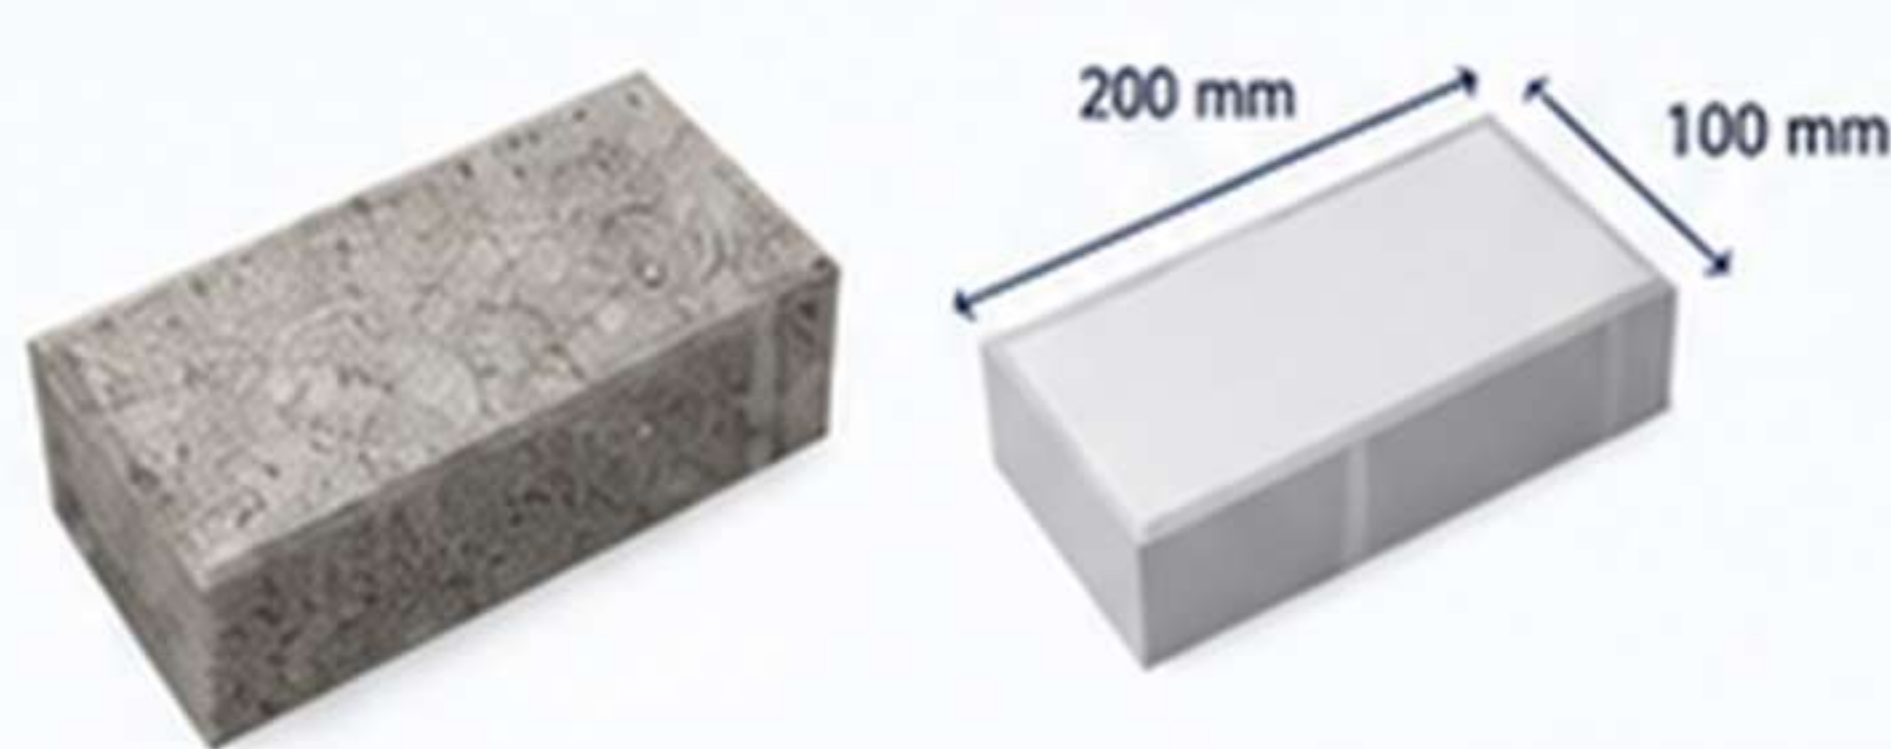


Dimensions:

- 200 mm × 100 mm

Available Thickness:

- 60 mm • 80 mm • 100 mm • 120 mm

SOLID SQUARE INTERLOCKING PAVER

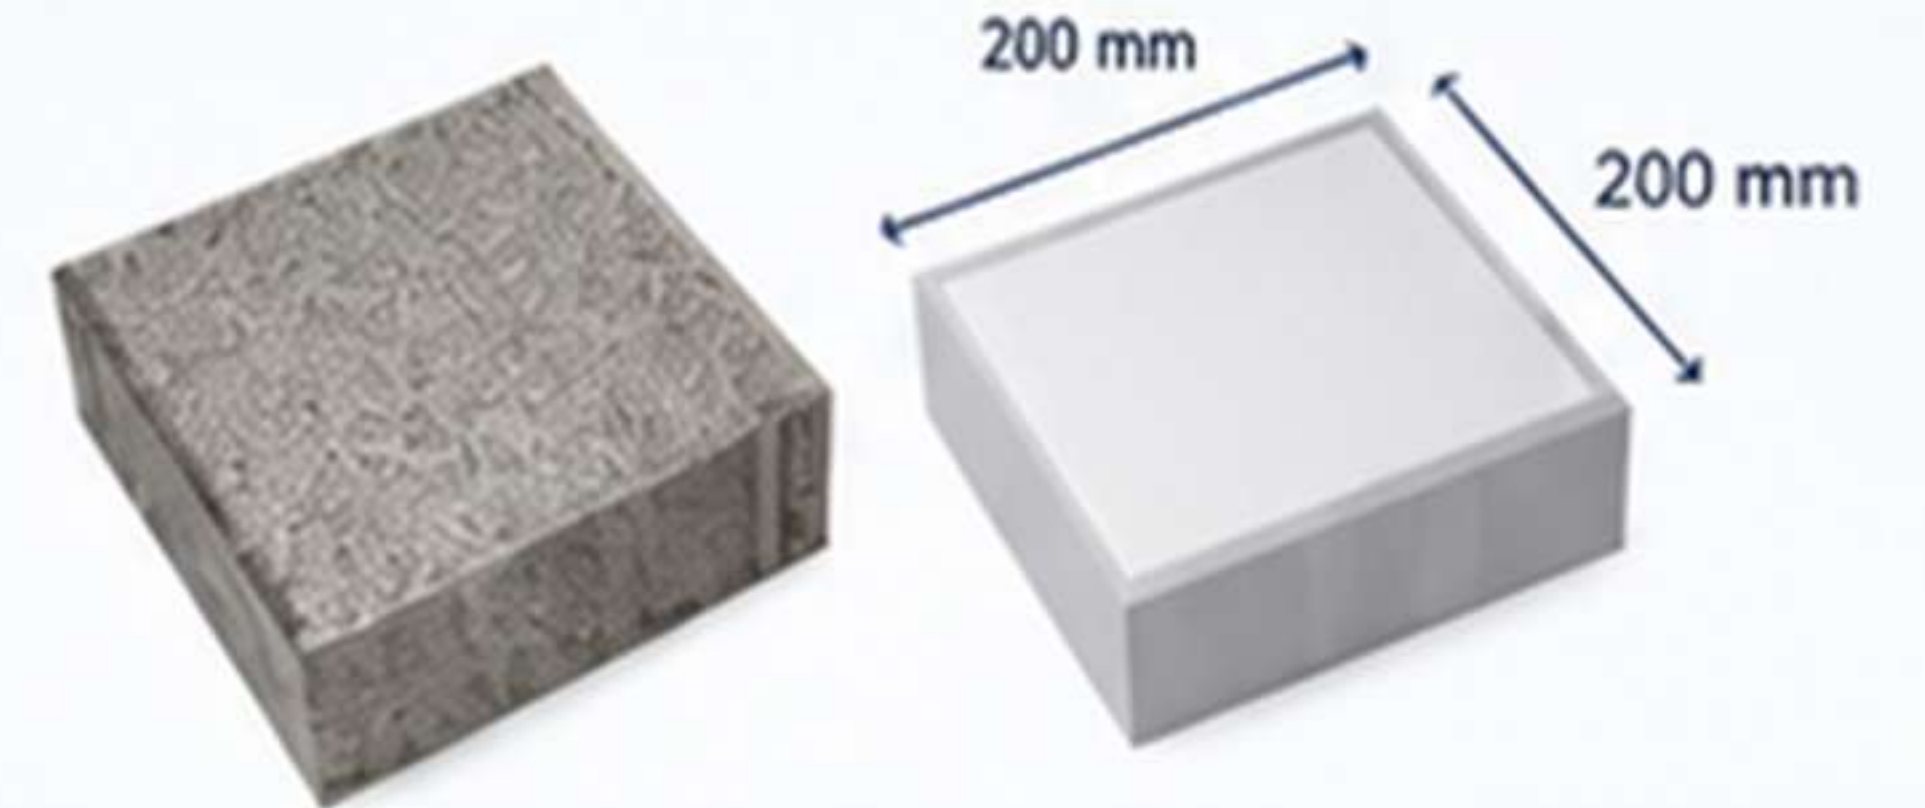

Dimensions:

- 200 mm × 200 mm

Available Thickness:

- 60 mm • 80 mm • 100 mm • 120 mm


GRASS PAVER SYSTEMS

Green Spaces. Strong Foundations.

Create durable outdoor surfaces that combine structural strength with natural greenery. Grass paver systems allow grass and landscaping to become part of the paved surface while helping manage water movement and reducing the visual impact of conventional paving.

Deal for: Driveways • Parking Areas • Walkways • Landscaped Spaces • Green Zones


Square Grass Paver

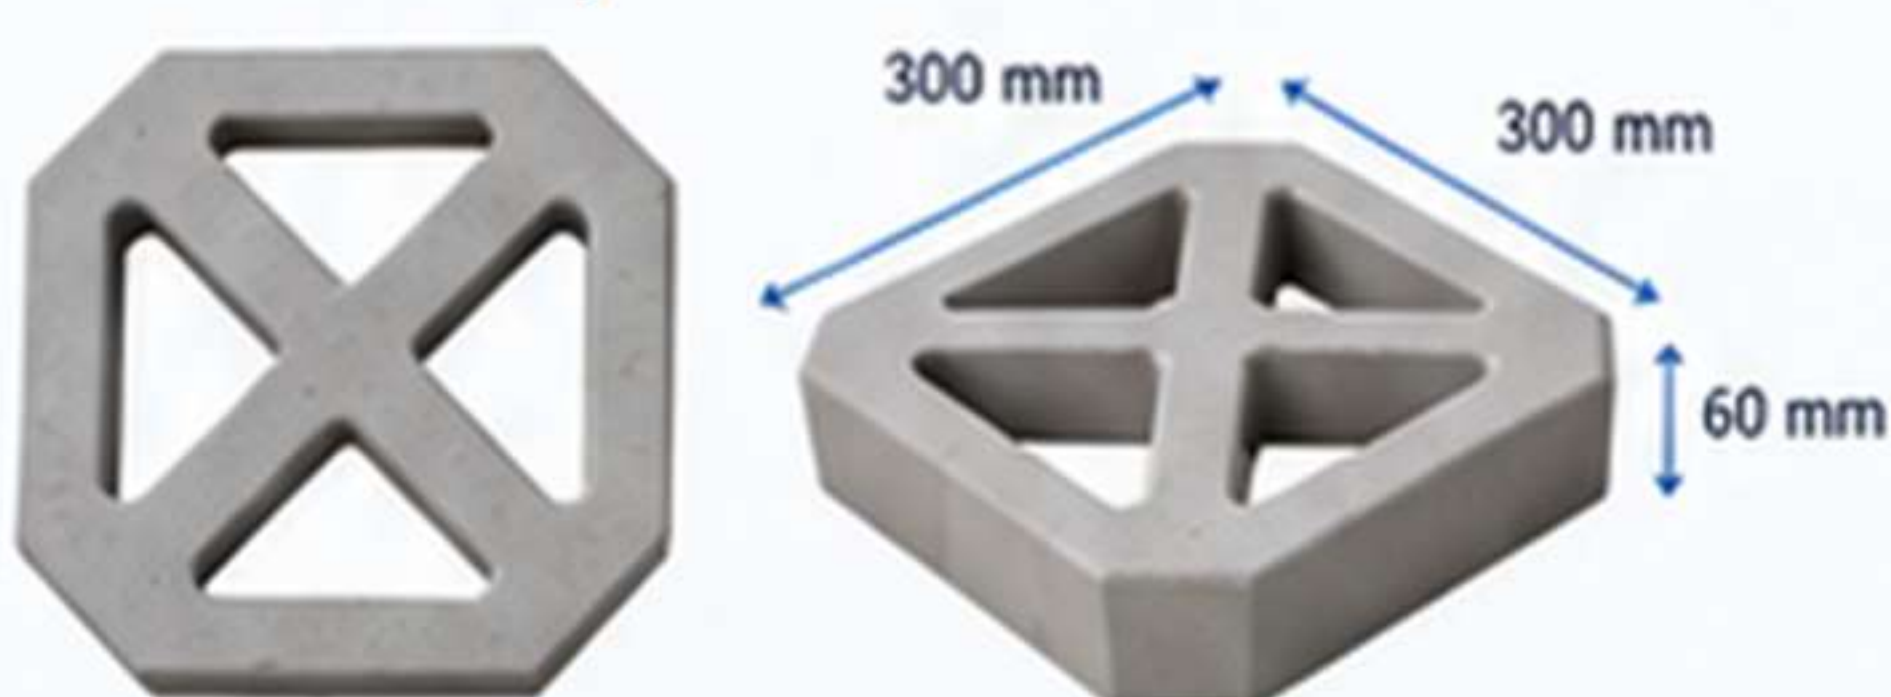

Dimensions: 300 × 300 mm

Thickness: 60 mm


Beach Paver

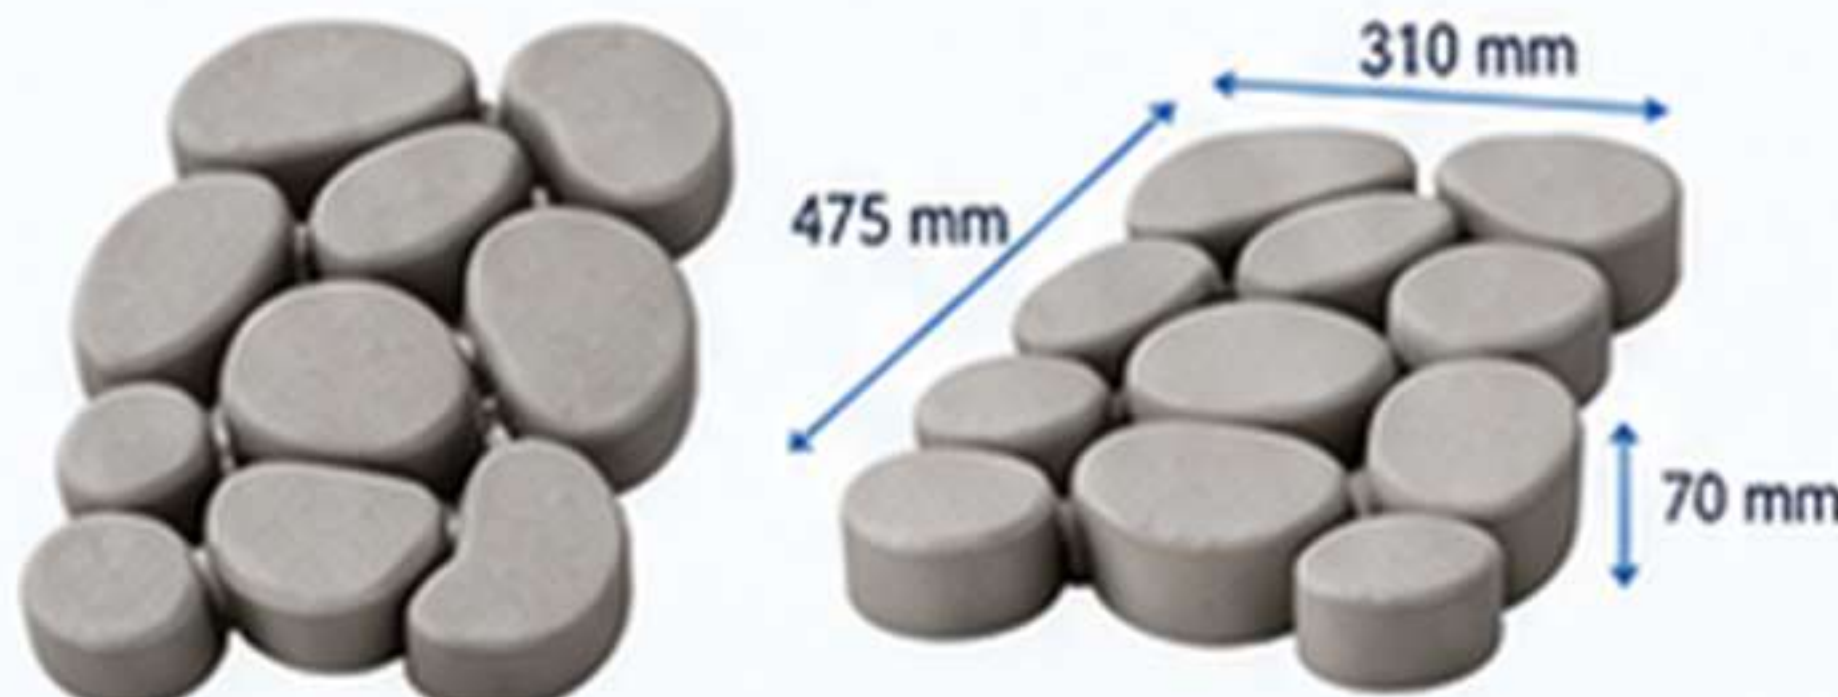

Dimensions: 475 × 310 mm

Thickness: 70 mm

Rect Grass Paver

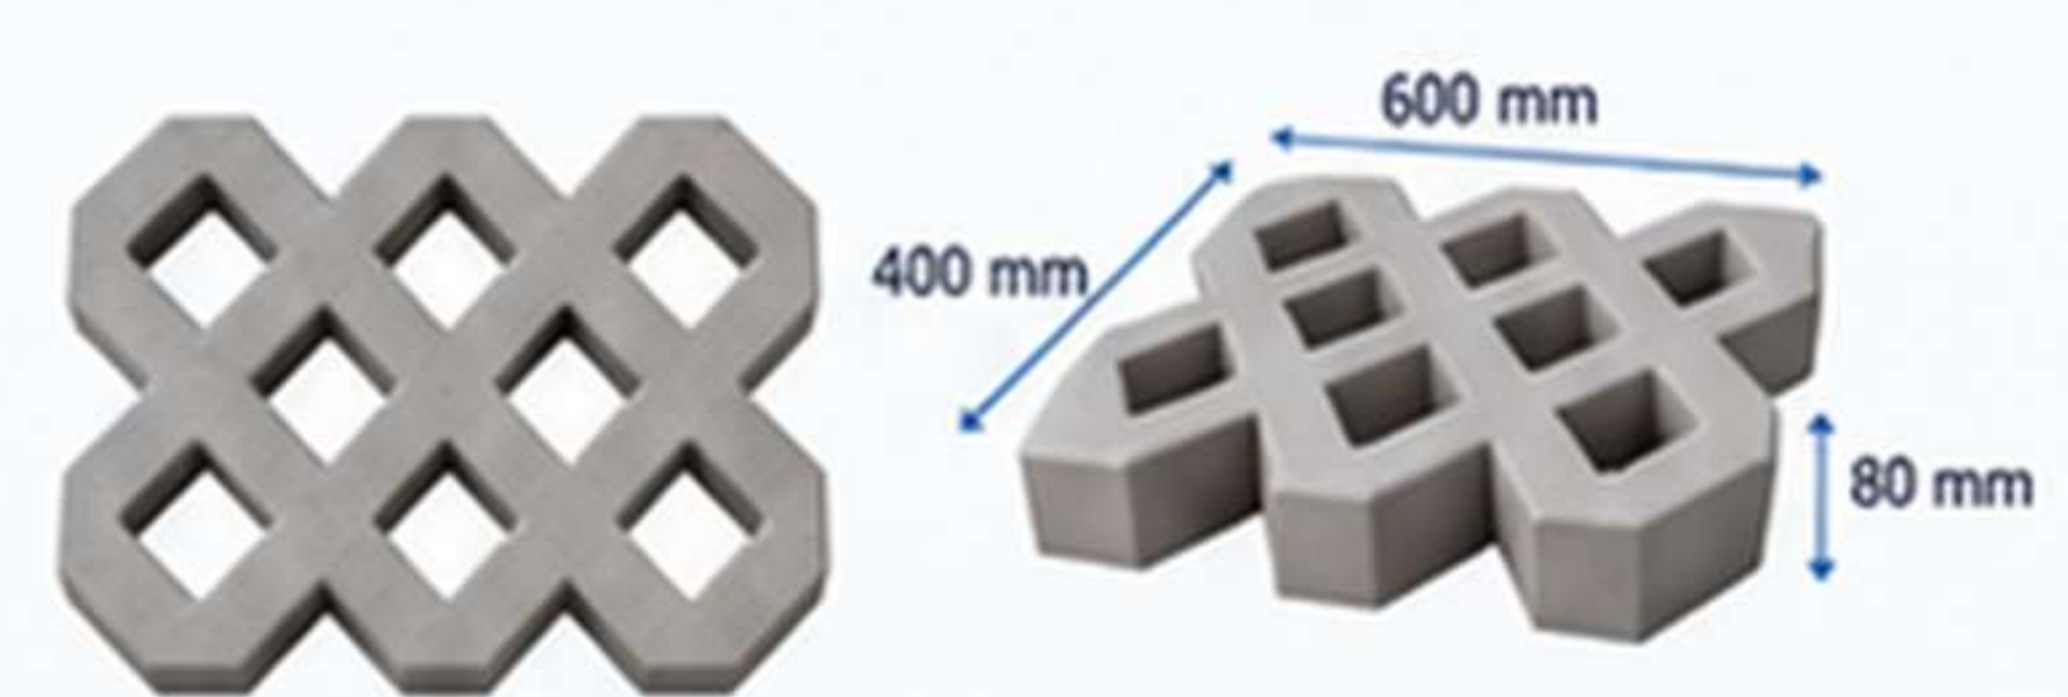

Dimensions: 600 × 400 mm

Thickness: 80 mm

SMART CITY PRODUCTS

Designed for Safer, Smarter & Accessible Urban Spaces

Our street design products enhance safety, improve walkability and add functionality to modern infrastructure. Built to last. Designed to perform.




TREE GUARD

Protects trees while allowing water permeability and a clean urban look.

Size Options:

- 300 mm dia ID
- Outer Size: 750 mm × 750 mm
- 600 mm dia ID
- Outer Size: 1050 mm × 1050 mm

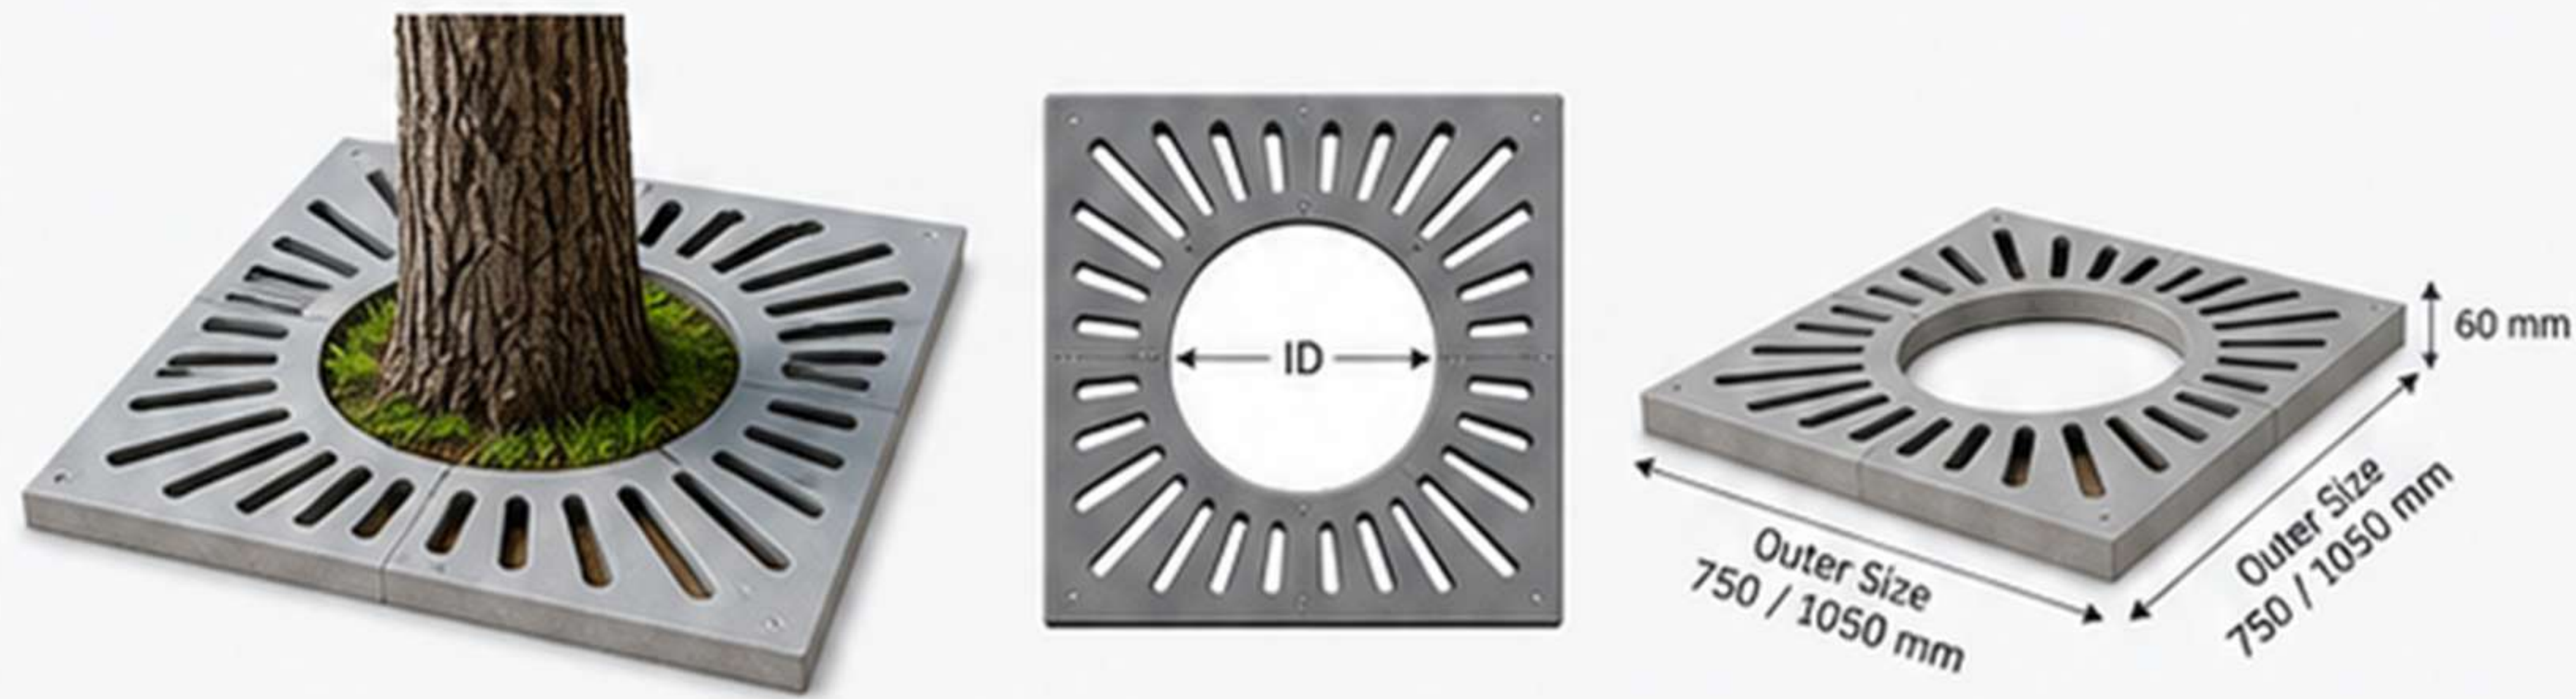

TACTILE PAVER

(STRIP / DOLLAR)


Assists the visually impaired with safe and comfortable navigation.

Directional (Strip)

Size: 60 mm × 300 mm × 300 mm

Warning (Dollar)

Size: 60 mm × 300 mm × 300 mm

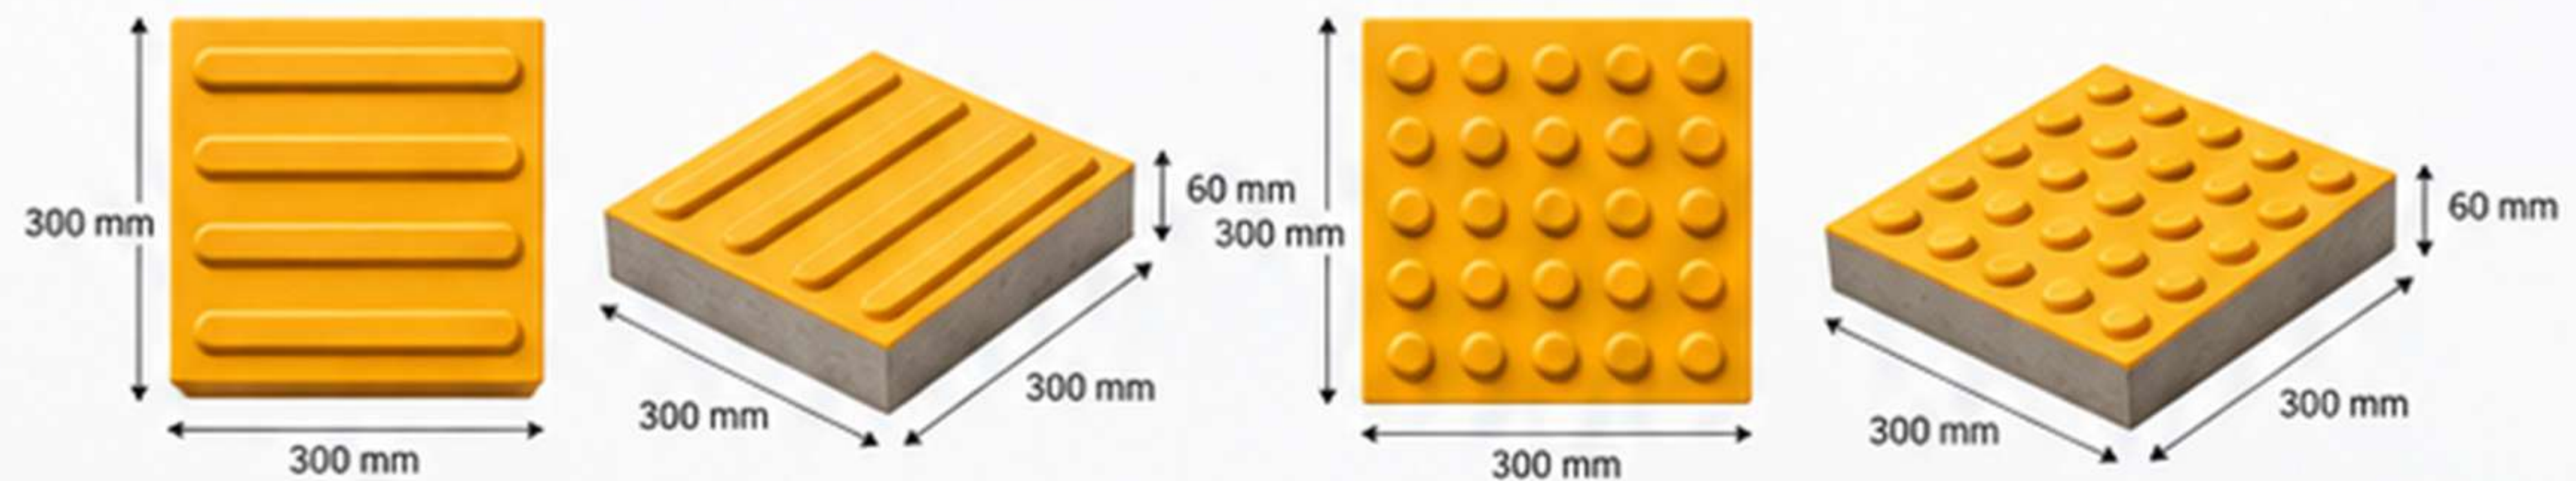

BOLLARD

Controls vehicle access and enhances pedestrian safety.


Specifications

- Height: 950 mm
- Diameter: 150 mm
- Reflector: Red Colour
- Reflector Band: 75 mm



OTHER STREET DESIGN ELEMENTS


'L' Shape Ramp

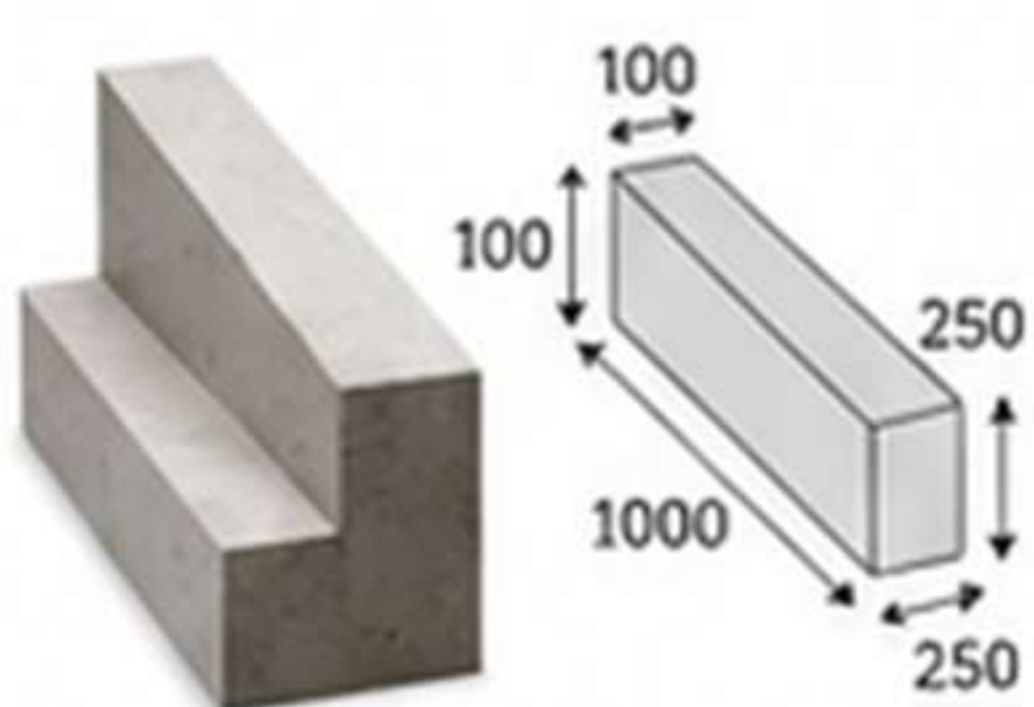


Outer Kerb 90° Big



'L' Shape Kerb

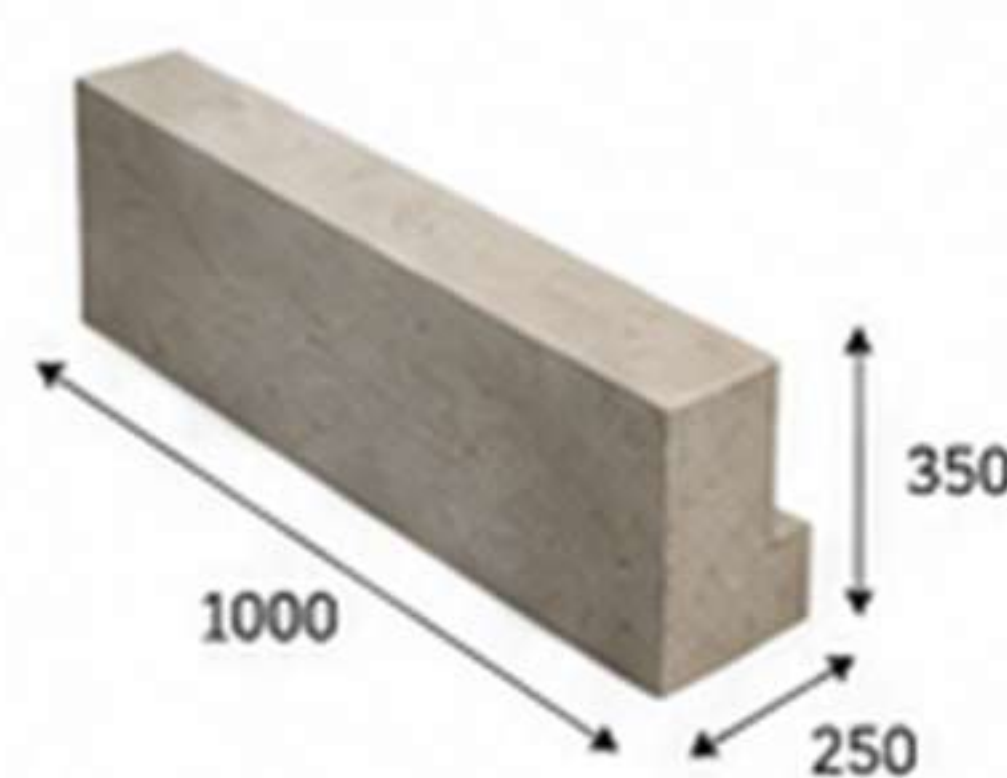

Outer Kerb 90°

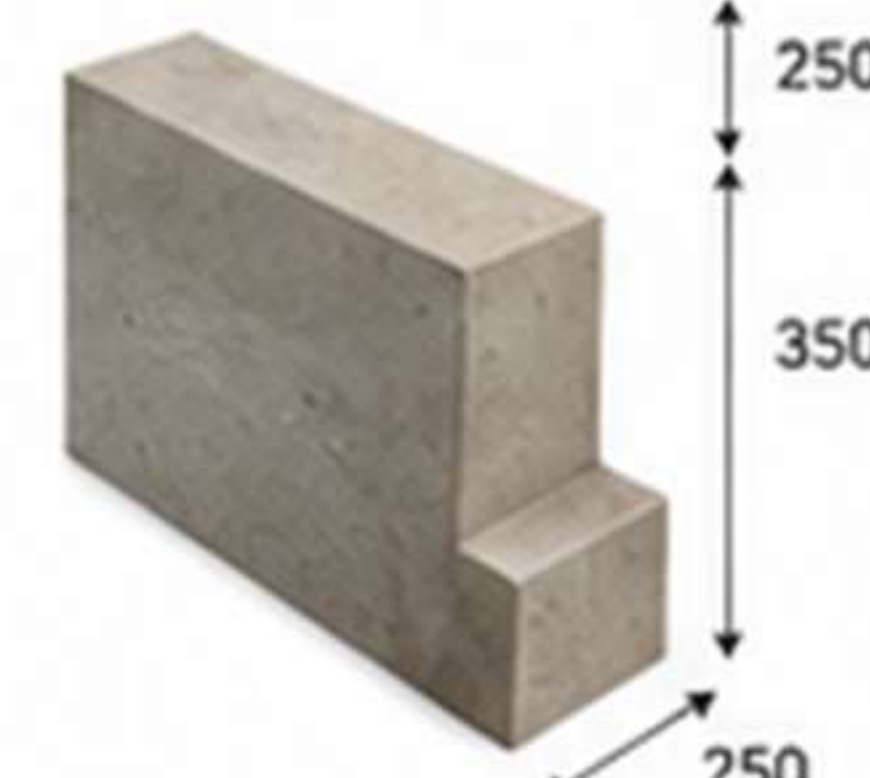

Inner Kerb Big



CRAUTCLAVED AERATED CONCRETE (AAC) BLOCKS


LIGHTER | STRONGER SMARTER BUILDING

High-performance AAC blocks made from a precise blend of cement, sand, fly ash, lime and water, with aluminum powder that creates a uniform cellular structure. The result is a lightweight, strong and thermally efficient block for modern construction.



Technical Specifications


Consistent quality for reliable performance.

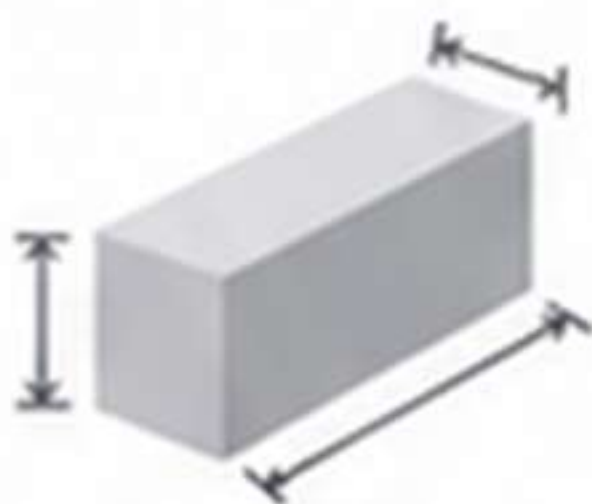

Standard Size
600 × 200 × 240 mm



Thickness Range
75 – 300 mm

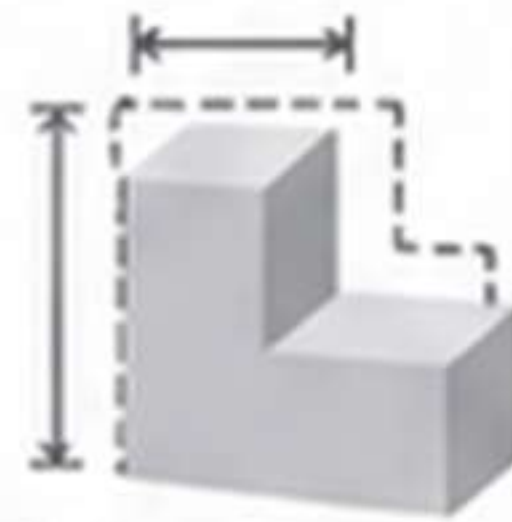

Size Tolerance
± 5 mm



Dry Density
550 – 650 kg/m³



Compressive Strength
> 3 N/mm²



Fire Resistance
Upto 4 hours
(for 200 mm wall)



Thermal Conductivity
0.24 W/m·K



Sound Reduction
37 – 42 dB

AAC Blocks vs. Clay Bricks

A smarter choice for modern construction.

	AAC Blocks	Clay Bricks
Size (L × H × B)	600 × 200 × 75 – 300 mm	225 × 75 × 95 mm
Compressive Strength	3 – 4 N/mm²	2.5 – 3.0 N/mm²
Dry Density	550 – 650 kg/m²	~1800 kg/m²
Fire Resistance	Upto 4 hours (200 mm wall)	~2 hours
Thermal Conductivity	0.24 W/m·K	0.81 W/m·K
Finish	Smooth, ready for plaster	Rough surface (needs plaster)
Installation Time	Faster construction	Slower construction



AAC Block Adhesive Binder

Strong Bonding. Thin Joints. Faster Construction.

A specially formulated adhesive binder designed for accurate and efficient AAC block installation. Its smooth consistency helps create strong joints while supporting faster, cleaner masonry work.

Feature Points:



Strong Adhesion



Easy Application



Smooth Workability



Reliable Bonding



Product Characteristics

Consistent performance for precise and efficient block laying.



Physical Form

Free-flowing grey powder



Water Requirement

25–30%



Spreadability

Smooth and easy to apply



Setting / Drying

Approx. 24 hours*



Working Life

Approx. 30 minutes



Coverage

Approx. 125 sq. ft. per 35 kg bag

PRODUCT DETAILS



Ingredients

Graded sand, pozzolanic materials, cementitious binder and performance-enhancing additives.



Packaging

Available in convenient **35 kg bags**.



Storage

Store in a dry, covered area away from moisture. Keep bags properly sealed until use.



Shelf Life

Up to **6 months** when stored in original sealed packaging under recommended conditions.

TECHNICAL SPECIFICATIONS

Engineered for dependable adhesion, strength and long-term masonry performance.



Bond Strength
0.34 N/mm²



Compressive Strength
5.0 N/mm² at 28 days



Maximum Particle Size
1 mm



Silt Content
1%



Silt Bulk Density
1650–1700 kg/m³

Ready-Mix Plaster

Consistent Mix. Smooth Finish. Reliable Walls.

A professionally blended cement-based plaster designed for faster application and dependable surface finishing. Carefully graded materials help deliver smooth workability, uniform coverage and durable results across a wide range of masonry surfaces.

Key Benefits:



Consistent Quality



Quick Application



Smooth Workability



Reduced Material Waste



Build Smoother Spaces

STRONGER WALLS
SMOOTHER FINISH
BUILT FOR TOMORROW

Applications

One Mix. Multiple Surface Solutions.



Internal Walls

Creates a smooth, even base for interior finishing.



External Facades

Designed for dependable plastering on exterior masonry surfaces.



AAC & Block Walls

Excellent compatibility with lightweight blocks and masonry units.



Stone & Masonry

Suitable for creating a consistent plaster layer over masonry surfaces.



RCC Surfaces

Can be applied over suitable concrete and structural surfaces.

TECHNICAL SPECIFICATIONS

Engineered for dependable strength, adhesion and finishing performance.

Splitting Tensile Strength	> 0.34 N/mm ²
Compressive Strength	> 5.0 N/mm ² at 28 days
Maximum Aggregate Size	< 2 mm
Bulk Density	1.4 – 1.6 kg/L
Flexural Strength	≥ 1.8 MPa at 28 days
Water Retention	≥ 95% EN 1015-8
Recommended Layer	Up to 12 mm per coat
Coverage	12 – 15 sq. ft. per 35 kg bag
Pot Life	Pot Life 1 – 2 hours
Water Requirement	Water Requirement 17 – 19% by weight

Product Characteristics

Designed for easy handling and consistent on-site performance.

Feature	Product Performance
Physical Form	Free-flowing grey powder
Water Requirement	Approx. 25–30%
Ease of Application	Smooth and easy to spread
Drying Period	Around 24 hours*
Working Life	Approx. 30 minutes
Coverage	Approx. 125 sq. ft. per 35 kg bag*

*Actual performance may vary depending on surface, temperature, humidity and application conditions.

RCC MANHOLE COVERS & FRAMES

Strong Access.
Built to Last.

Precision-made RCC manhole covers and frames engineered for dependable access to underground utilities.

- Multiple Configurations
- Reinforced Construction
- Load-Ready Designs
- Custom Sizes Available



KEY FEATURES

A practical precast solution for demanding utility and access requirements.



**Reinforced
Concrete
Construction**

For strength and durability



**Easy
Handling &
Installation**
Designed for quick and efficient placement



**Long
Service Life**
Built for reliable performance



**Multiple Shapes
& Sizes**
Circular, square and rectangular options

DEPENDABLE ACCESS SOLUTIONS



Designed for underground utilities



Safe and reliable access



Suitable for residential, commercial and infrastructure projects



Custom sizes available as per project needs

WHY CHOOSE RCC MANHOLE COVERS & FRAMES?

Dependable access solutions designed for strength, safety and easy installation.

Feature	Our RCC Manhole Covers & Frames
Strength	Reinforced concrete construction
Handling	Easier to install and position
Service Life	Designed for long-term outdoor use
Flexibility	Circular, square and rectangular options
Edge Protection	Mild-steel rim option available
Customization	Project-specific sizes can be produced

PRODUCT SPECIFICATIONS

Manufactured for consistent performance across different load requirements.

Parameter	Details
Material	Reinforced cement concrete
Shapes	Circular, Square & Rectangular
Concrete Grade	M35 or higher
Reinforcement	Integrated steel reinforcement
Drainage	Drainage holes available where required
Rim Protection	Mild-steel rim option
Custom Sizes	Available on request
Standard	Tested/selected as per IS 12592 requirements

AVAILABLE STANDARD SIZES

DISCRIPTION	SHAPE	WT./SET (KGS)	CLEAR OPENING	FRAME DIMENSIONS		COVER DIMENSIONS	
				(L X B)	T	(L X B)	T
20 MT HD							
Heavy Duty	Circular	180	540	840	150	630	95
Heavy Duty	Circular	225	560	880	175	720	95
Heavy Duty	Square	910	1200X1200	1540X1540	220	1360X1360	125
Heavy Duty	Rectangular	575	900X1200	1200X1500	160	1045X670(2NOS)	95
Heavy Duty	Square	460	1000X1000	1250X1250	170	1100X1100	95
Heavy Duty	Square	480	900X900	1150X1150	160	1035X1035	95
Heavy Duty	Square	300	750X750	1010X1010	155	850X850	95
Heavy Duty	Rectangular	295	900X600	1150X850	160	1020X720	95
Heavy Duty	Rectangular	260	900X450	1150X700	155	1000X550	95
Heavy Duty	Square	225	600X600	850X850	180	700X700	95
Heavy Duty	Rectangular	200	600X450	850X700	180	700X550	95
Heavy Duty	Square	110	450X450	680X680	130	550X550	70
Heavy Duty	Square	75	300X300	530X530	125	400X400	70
10 MT MD							
Medium Duty	Circular	110	560	770	120	670	70
Medium Duty	Rectangular	350	900X1200	1140X1440	125	1000X645(2nos)	70
Medium Duty	Rectangular	300	860X600	1150X900	125	1000X750	70
Medium Duty	Square	340	860X860	1150X1150	150	1000X490(2nos)	70
Medium Duty	Square	345	1000X1000	1230X1230	125	1100X1100	70
Medium Duty	Square	305	900X900	1130X1130	130	1000X1000	70
Medium Duty	Square	240	750X750	970X970	130	850X850	70
Medium Duty	Rectangular	210	900X600	1130X850	130	1000X700	70
Medium Duty	Rectangular	175	900X450	1130X680	130	1000X550	70
Medium Duty	Square	160	600X600	830X830	130	700X700	70
Medium Duty	Rectangular	140	600X450	830X680	130	700X550	70
5 MT MD							
Medium Duty	Rectangular	140	900X450	1130X680	105	1000X550	50
Medium Duty	Square	125	600X600	830X830	105	700X700	50
Medium Duty	Rectangular	100	600X450	830X680	105	700X550	50
Medium Duty	Square	85	450X450	680X680	105	550X550	50
Medium Duty	Square	40	300X300	485X485	95	380X380	50
2.5 MT LD							
Light Duty	Circular	85	540	745	100	610	50
Light Duty	Rectangular	215	900X900	1130X1130	110	1000X1000	50
Light Duty	Rectangular	180	1000X600	1230X830	100	1100X700	50
Light Duty	Rectangular	170	900X600	1130X830	105	1000X700	50
Light Duty	Rectangular	80	900X450	1080X610	80	970X520	37
Light Duty	Square	85	600X600	780X780	80	660X660	37
Light Duty	Rectangular	65	600X450	780X610	80	660X520	37
Light Duty	Square	50	450X450	610X610	80	520X520	37
Light Duty	Square	25	260X260	390X390	80	300X300	37
5 MT MD Fix Size							
Fix Size Cover	Rectangular	130	500X800	720X1020	105	900X600	50
Fix Size Cover	Rectangular	110	350X800	590X1040	105	900X450	50
Fix Size Cover	Square	100	500X500	675X675	105	600X600	50
Fix Size Cover	Rectangular	80	500X350	730X570	105	600X450	50
Fix Size Cover	Square	70	350X350	570X570	105	450X450	50
Fix Size Cover	Rectangular	50	275X425	600X450	90	500X350	50
2.5 MT LD Fix Size							
Fix Size Cover	Rectangular	100	500X800	720X1040	80	600X900	40
Fix Size Cover	Rectangular	75	350X800	590X1040	80	450X900	40
Fix Size Cover	Rectangular	45	500X350	730X570	80	450X600	40



LD 2.5

Rectangular, Square or Circular Types

Designed for use in residential and institutional premises with pedestrian movement and occasional light motor vehicle traffic. These covers are also commonly used for inspection chambers.



MD-5

Rectangular or Circular Types

Recommended for service lanes and road pavements where medium duty vehicular traffic is expected, including car parking areas.



MD-10

Rectangular or Circular Types

Suitable for service lanes and road pavements with medium duty vehicular traffic, including car parking areas.



HD-20

Circular, Lamp Hole, Square or Rectangular (Scraper Manhole) Types.

Designed for institutional and commercial areas, carriageways, city truck roads and bus terminals where heavy duty vehicular traffic is expected. Applicable for wheel loads between 50 to 100 KN, such as buses and trucks, and also for parking areas. These are used where manhole chambers are located between the pavement and the centre portion of the road.




EHD-35

Rectangular, Square or Circular (Scraper Manhole) Types

Suitable for carriageways in commercial, industrial and port areas, as well as near warehouses and godowns, where frequent loading and unloading of trucks and trailers occurs. These covers are designed for slow to fast moving vehicular traffic with wheel loads up to 115 KN, irrespective of the location of the manhole chambers.

OUR VALUABLE CLIENTS



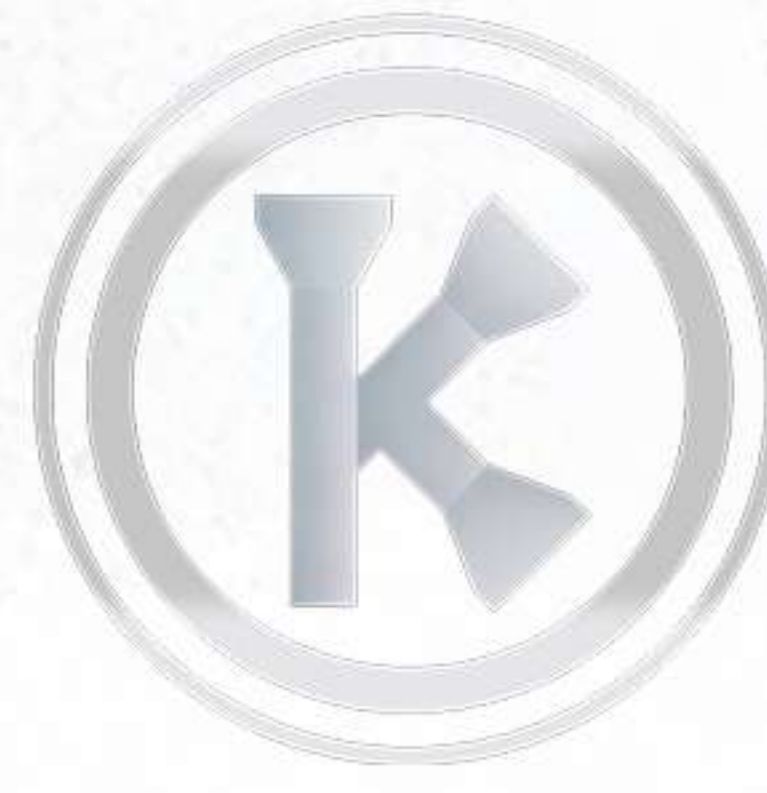

KATHE

CEMENT PIPES INDUSTRY

CONTACT US



+91 8308024777
+91 9657024777



sales@kathecementpipes.com
vikramkathe@gmail.com



www.kathecementpipes.com

HEAD OFFICE



Kathe Cement Pipes Industry
High Street, Shop No. P-23,
Phase-2, Bapu Pool Road,
Makhmalabad - Chandshi,
River Cruise Road,
Nashik - 422003

PLANT ADDRESS



Kathe Cement Pipes Industry
Opp Nilkamal Phase 3
At post:- Madkejamb
Tal - Dindori; Dist - Nashik

LOCATION



Shop No. 4, Plot no B-108,
Balkrishna Apt, Sec-23, Seawoods (E),
Near South Indian bank.
Venture by - 400706



Nivruti Complex, Dwarka, Nashik,
Maharashtra - 422001



Near Parshvanath Jain Mandir,
A/P Kumbhoj Tal-Hatakanagle
Dist-Kolhapur - 416111



Kasbe Sukene, Niphad,
Nashik - 422302

